

PS5915-S26

Low Capacitance ESD Protection

Voltage

5 V

Features

- IEC61000-4-2 (ESD) : $\pm 30\text{kV}$ Air, $\pm 30\text{kV}$ Contact
- IEC61000-4-4(EFT) : 40A(5/50ns)
- IEC61000-4-5 (Lightning) : 10A (8/20uS)
- Low leakage current, maximum of 1uA at rated voltage
- Ultra low clamping voltage
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard


Mechanical Data

- Case : SOT-23 6L-1 Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.0142 grams

Applications

- USB 2.0 Power and Data lines protection
- Notebook/Desktop Computers
- SIM ports
- Video Graphics Cards

SOT-23 6L-1

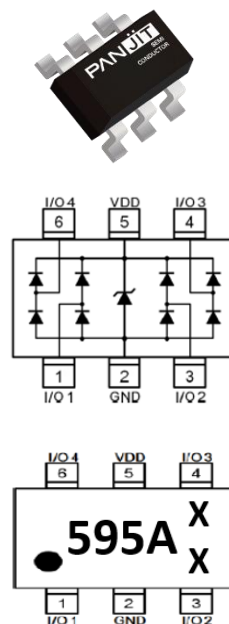

Part Marking	Parameter
595A X	595A = Marking Code
X	X = Tracking Code

Maximum Ratings and Thermal Characteristics (T_A = 25°C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNITS
ESD IEC61000-4-2(Air)	V _{ESD}	± 30	kV
ESD IEC61000-4-2(Contact)		± 30	
Typical Thermal Resistance	R _{θJA}	350	°C/W
Operating Junction Temperature Range	T _J	-55 to +125	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

PS5915-S26

Electrical Characteristics (T_A = 25°C unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 1)	V _{RWM}	IO Pin to GND	-	-	3.3	V
Reverse Stand-Off Voltage ^(Note 1)	V _{RWM}	VDD Pin to GND	-	-	5	V
Reverse Breakdown Voltage	V _{BR}	I _{BR} = 1mA, I/O Pin to GND	5	-	11	V
Reverse Breakdown Voltage	V _{BR}	I _{BR} = 1mA, VDD Pin to GND	5.5	-	11	V
Forward Voltage	V _F	I _F = 15mA, I/O Pin to GND	-	1	-	V
Reverse Leakage Current	I _R	V _R = 3.3V, I/O Pin to GND	-	0.5	1	uA
Reverse Leakage Current	I _R	V _R = 5V, VDD Pin to GND	-	0.5	1	uA
Clamping Voltage	V _{CL}	I _{PP} = 5A, t _P =8/20μs, any I/O pin to GND	-	3.8	4.8	V
Clamping Voltage	V _{CL}	I _{PP} = 5A, t _P =8/20μs, VDD pin to GND	-	6.5	7.5	V
Clamping Voltage TLP ^(Note 2)	V _{CL}	I _{TLP} = 16A, t _P = 100ns, I/O pin to GND	-	4	-	V
Clamping Voltage TLP ^(Note 2)	V _{CL}	I _{TLP} = 16A, t _P = 100ns, VDD pin to GND	-	6.5	-	V
Off State Junction Capacitance ^(Note 3)	C _J	V _R = 1.65V, f = 1MHz, I/O Pin to GND	-	0.9	1.4	pF

NOTES :

1. A transient suppressor is selected according to the working peak reverse voltage(V_{RWM}), which should be equal to or greater than the DC or continuous peak operation voltage level.
2. Testing using Transmission Line Pulse (TLP) conditions: Z₀ = 50Ω, t_P = 100 ns.
3. This parameter is guaranteed by design.

PS5915-S26

TYPICAL CHARACTERISTIC CURVES

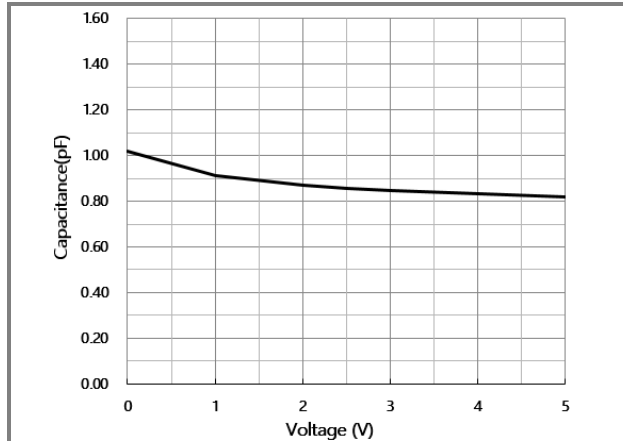


Fig.1 Typical Junction Capacitance

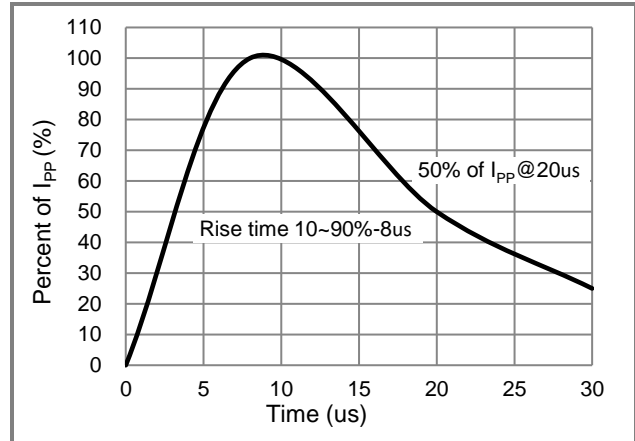


Fig.2 Pulse Waveform

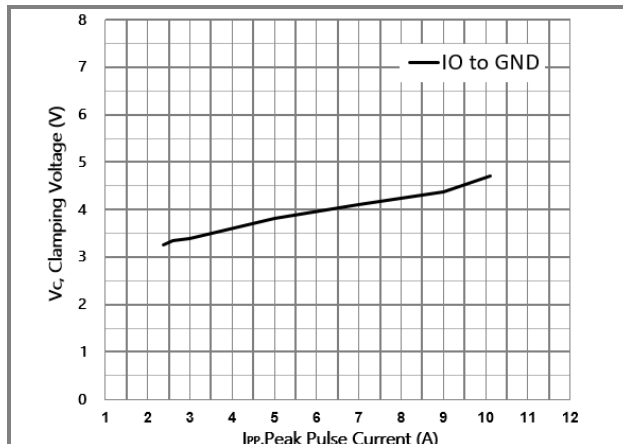


Fig.3 Typical Peak Clamping Voltage

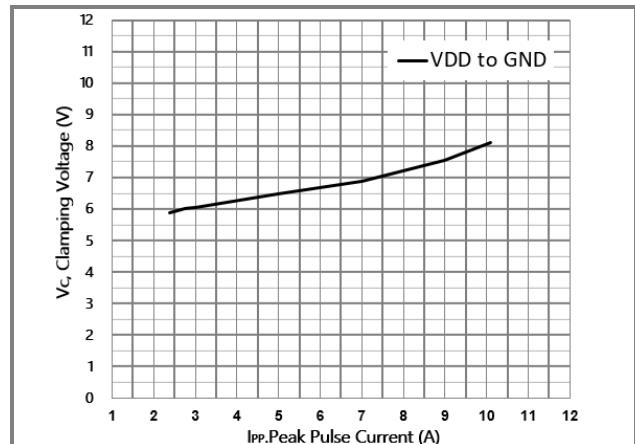


Fig.4 Typical Peak Clamping Voltage

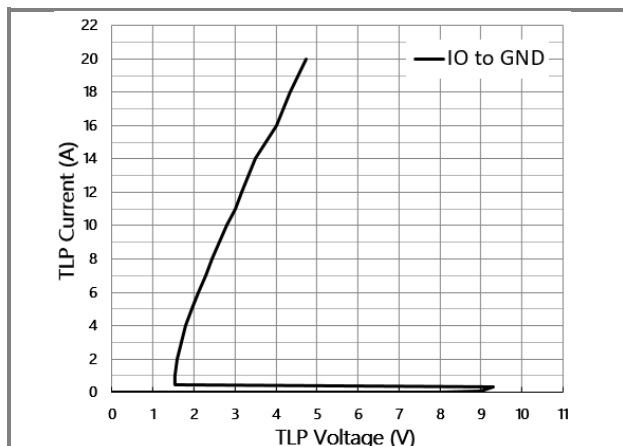


Fig.5 TLP Measurement

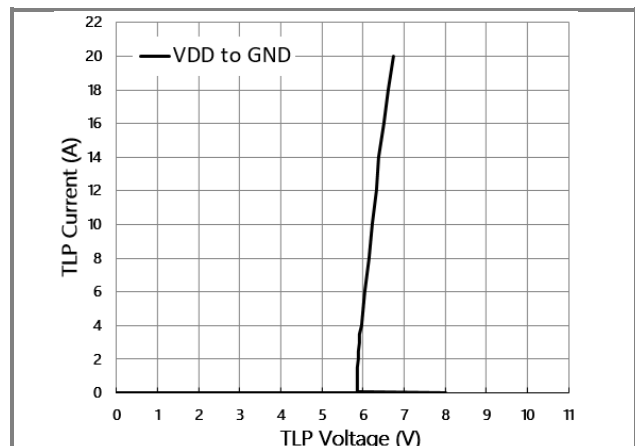


Fig.6 TLP Measurement

PS5915-S26


Product and Packing Information

Part No.	Package Type	Packing Type	Marking
PS5915-S26	SOT-23 6L-1	3K pcs / 7" reel	595A

Packaging Information & Mounting Pad Layout


SOT-23 6L-1 Dimension

Unit: inch(mm)

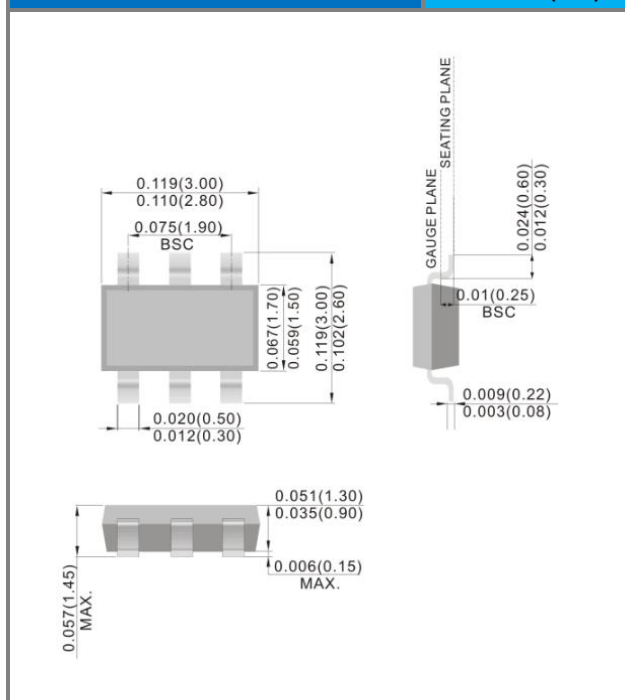

SOT-23 6L-1 Pad Layout

Unit: inch(mm)

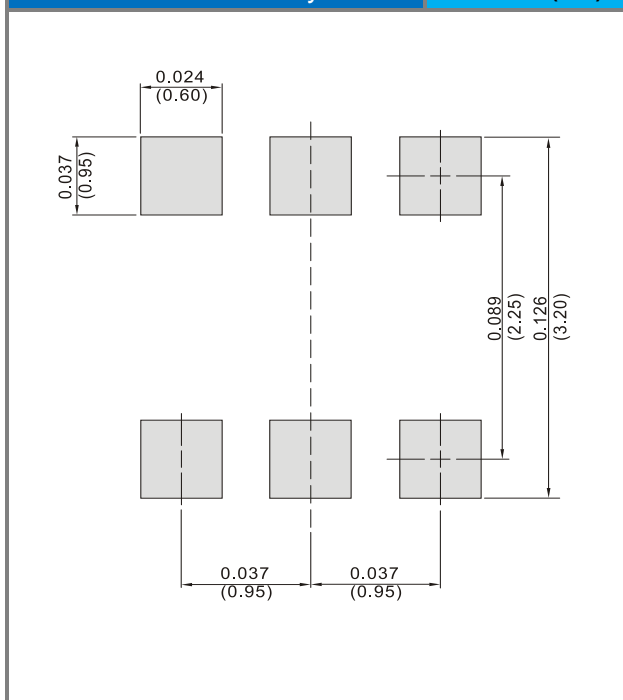

PS5915-S26

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panjit:](#)

[PS5915-S26_S1_00501](#)