

SACC-E-M12MSL-4CON-M16XL/2,0-US - Device connector front mounting



1329929

<https://www.phoenixcontact.com/us/products/1329929>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, Power, 4-position, Flush-type male connector, straight, M12-Standard, coding: L, on free cable end, Front mounting, M16 x 1.5, Individual wires, cable length: 2 m, 2.50 mm², PEX litz wire

Your advantages

- For compact devices: transmit high power in a confined space
- Easy-to-install, optimized XL housing contour with wrench size 19
- Mechanical tightening limitation for long-term-stable gasket
- Preassembled with litz wires for immediate use
- Customer-specific assemblies and litz wire lengths available
- Sealed on the litz wire side for optimum leak-tightness
- For high transmission safety: shield connection to the housing with optional EMC nut

Commercial data

Item number	1329929
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB24
Product key	ABQCEF
GTIN	4063151625443
Weight per piece (including packing)	257.8 g
Weight per piece (excluding packing)	242.185 g
Customs tariff number	85444290
Country of origin	US

SACC-E-M12MSL-4CON-M16XL/2,0-US - Device connector front mounting



1329929

<https://www.phoenixcontact.com/us/products/1329929>

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
--------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Safety note

Safety note	<p>WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none">• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.• The products are suitable for applications in plant, controller, and electrical device engineering.• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.• Assembled products may not be manipulated or improperly opened.• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).• When using the product in direct connection with third-party manufacturers, the user is responsible.• For operating voltages > 50 V AC, conductive connector housings must be grounded• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.• Observe the corresponding technical data. You will find information:<ul style="list-style-type: none">o On the producto On the packing labelo In the supplied documentationo Online at phoenixcontact.com/products under the product• Only use tools recommended by Phoenix Contact• Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
-------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SACC-E-M12MSL-4CON-M16XL/2,0-US - Device connector front mounting



1329929

<https://www.phoenixcontact.com/us/products/1329929>

- Ensure that the protective or functional ground has been properly connected.
- VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
- The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

Mounting

Mounting type	Front mounting M16 x 1.5 Tightening limitation
Assembly note	Tightening limitation

Product properties

Product type	Circular connectors (device side)
Application	Power
Sensor type	Power
Number of positions	4
No. of cable outlets	1
No. of power contacts	4
Shielded	no
Coding	L
Thread type	M12

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM
Material wire insulation	PE-X
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA
Material for screw connection	CuZn alloy, nickel-plated
Conductor material	Bare Cu litz wires

Electrical properties

Rated surge voltage	1.5 kV
Insulation resistance	≥ 100 MΩ
Test voltage	1.5 kV
Test voltage Core/Core	6 kV

SACC-E-M12MSL-4CON-M16XL/2,0-US - Device connector front mounting



1329929

<https://www.phoenixcontact.com/us/products/1329929>

Connection data

Conductor connection

Connection method	Individual wires
Contact connection type	Pin
Conductor cross section	2.5 mm ²

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

Connector

Connection 1

Head design	Flush-type male connector
Head cable outlet	straight
Head thread type	M12
Head locking type	Standard
Coding	L

Connection 2

Head design	free cable end
-------------	----------------

Cable/line

Cable length	2 m
Cable type	PEX litz wire
Signal type/category	Power
Wire diameter incl. insulation	3 mm
Single wire, color	brown 1, white 2, blue 3, black 4
Cable cross section	2.5 mm ²
Conductor material	Bare Cu litz wires
AWG signal line	14
Material wire insulation	PE-X
Test voltage Core/Core	6 kV
Halogen-free	according to IEC 60754-1
Flame resistance	in acc. with UL FT-2
Other resistance	Hydrolysis-resistant
Ambient temperature (operation)	-40 °C ... 85 °C (without mechanical actuation)
	-40 °C ... 85 °C (without mechanical actuation)
	-25 °C ... 105 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

SACC-E-M12MSL-4CON-M16XL/2,0-US - Device connector front mounting



1329929

<https://www.phoenixcontact.com/us/products/1329929>

Degree of protection	IP65/IP67 (when mated)
	IP65/IP67
Ambient temperature (operation) (male connector/female connector)	-25 °C ... 85 °C (Plug / socket)
Ambient temperature (operation) (Cable, fixed installation)	-40 °C ... 85 °C (without mechanical actuation)
Ambient temperature (operation) (Cable, flexible installation)	-25 °C ... 105 °C (Cable, flexible installation)
Ambient temperature (operation) (Cable, fixed installation)	-40 °C ... 105 °C (cable, fixed installation)
UL Type Rating	Type 4 (indoor use only)
	Type 12

Standards and regulations

Flame resistance	in acc. with UL FT-2
Other resistance	Hydrolysis-resistant
Standard designation	M12 circular connector
Standards/specifications	according to IEC 61076-2-111


SACC-E-M12MSL-4CON-M16XL/2,0-US - Device connector front mounting

1329929

<https://www.phoenixcontact.com/us/products/1329929>

Drawings

Schematic diagram

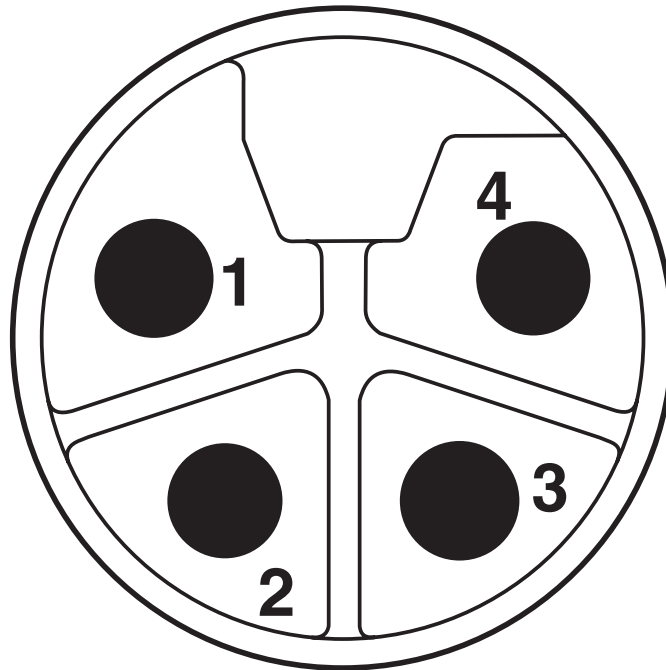

Pin assignment of M12 connector, 4-pos., L-coded, pin side view


SACC-E-M12MSL-4CON-M16XL/2,0-US - Device connector front mounting




1329929

<https://www.phoenixcontact.com/us/products/1329929>

Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1329929>

 UL Recognized Approval ID: E468743-20230808				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Pollution degree 2	600 V	16 A	- 14	-
In accordance with UL 2237	250 V	16 A	- 14	-

SACC-E-M12MSL-4CON-M16XL/2,0-US - Device connector front mounting



1329929
<https://www.phoenixcontact.com/us/products/1329929>

Classifications

ECLASS

ECLASS-13.0	27440103
-------------	----------

ETIM

ETIM 9.0	EC003570
----------	----------

SACC-E-M12MSL-4CON-M16XL/2,0-US - Device connector front mounting



1329929

<https://www.phoenixcontact.com/us/products/1329929>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
-----------------------------------------	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com