

2902030

https://www.phoenixcontact.com/us/products/2902030

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



3-way signal conditioner with plug-in connection technology for the electrical isolation of analog signals. Input signal:  $0 \ V \dots 10 \ V$ , output signal:  $4 \ mA \dots 20 \ mA$ , push-in connection technology

### Product description

Standard signal 3-way signal conditioner with plug-in connection technology for the electrical isolation, conversion, amplification, and filtering of standard signals. The measuring transducer supports fault monitoring and NFC communication.

#### Commercial data

Item number	2902030
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C404
Product key	DK1121
GTIN	4046356652025
Weight per piece (including packing)	106.7 g
Weight per piece (excluding packing)	98 g
Customs tariff number	85437090
Country of origin	DE



2902030

https://www.phoenixcontact.com/us/products/2902030

### Technical data

#### Notes

ı	Itilization	restriction
ι	JIIIIZATION	restriction

EMC note	EMC: class A product, see manufacturer's declaration in the
	download area

#### Product properties

Product type	Input signal conditioner
Product family	MINI Analog Pro
No. of channels	1
Los defens de contratifica OR Obrada d	

#### Insulation characteristics: GB Standard

Overvoltage category	II
Pollution degree	2

#### Electrical properties

Electrical isolation	3-way isolation
Electrical isolation between input and output	yes
Limit frequency (3 dB)	≈ <b>f</b> Hz
Protective circuit	Transient protection
Step response (10-90%)	≈ <b>↓</b> ms
Maximum temperature coefficient	0.01 %/K
Temperature coefficient, typical	0.01 %/K
Maximum transmission error	0.05 % (of final value)

#### Electrical isolation Input/output/power supply

Rated insulation voltage	300 V <sub>rms</sub>
Test voltage	3 kV AC (50 Hz, 60 s)
Insulation	Reinforced insulation according to IEC/EN 61010-1

#### Supply

Nominal supply voltage	24 V DC
Supply voltage range	9.6 V DC 30 V DC (The DIN rail connector (ME 6,2 TBUS-2 1,5/5-ST-3,81 GN, item no. 2869728) can be used to bridge the supply voltage. It can be snapped onto a 35 mm DIN rail in accordance with EN 60715)
Typical current consumption	25 mA (24 V DC)
	54 mA (12 V DC)
Power consumption	≤ 800 mW (9.6 V DC)

#### Input data

#### Signal: Voltage

9	
Number of inputs	1
Configurable/programmable	no



2902030

https://www.phoenixcontact.com/us/products/2902030

Voltage input signal	0 V 10 V
Input resistance of voltage input	≈ <b>™</b> MΩ

### Output data

#### Signal: Current

Number of outputs	1
Configurable/programmable	no
Open-circuit voltage	< 17 V
Current output signal	4 mA 20 mA
Max. current output signal	22 mA
Load/output load current output	≤ 600 Ω (20 mA)
Ripple	< 20 mV <sub>PP</sub> (600 Ω)

#### Connection data

Connection method	Push-in connection
Stripping length	10 mm
Conductor cross-section rigid	0.2 mm <sup>2</sup> 2.5 mm <sup>2</sup> (with ferrule)
	0.14 mm <sup>2</sup> 2.5 mm <sup>2</sup> (without ferrule)
Conductor cross-section flexible	0.14 mm² 2.5 mm²
Conductor cross-section AWG	24 12 (flexible)

#### Ex data

Ex installation (EPL)	Gc
	Div. 2

## Signaling

Status display Green LED (supply voltage)
---

#### **Dimensions**

Width	6.2 mm
Height	109.81 mm
Depth	119.2 mm

#### Material specifications

Color	gray (RAL 7042)
Housing material	PBT
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 2

#### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP20 (not assessed by UL)
Ambient temperature (operation)	-40 °C 70 °C



2902030

https://www.phoenixcontact.com/us/products/2902030

Ambient temperature (storage/transport)	-40 °C 85 °C
Permissible humidity (operation)	5 % 95 % (non-condensing)
pprovals	
CE	
Certificate	CE-compliant
ATEX	
Identification	
Certificate	BVS 19 ATEX E 047 X
IECEx	
Identification	Ex ec IIC T4 Gc
Certificate	IECEx BVS 19.0041X
	12021010101111
CCC / China-Ex	Ev ag IIC T4 Ca
Identification	Ex ec IIC T4 Gc
UL, USA/Canada	
Identification	UL 508 Listed
	Class I, Div. 2, Groups A, B, C, D T6
	Class I, Zone 2, Group IIC T6
Shipbuilding approval	
Certificate	DNV GL TAA00002UA
EAC Ex	
Identification	₩⊡ LJEx ec IIC T4 Gc
Certificate	BY/112 02.01 TP012 103.01 00079
Chinhuilding data	
Shipbuilding data Temperature	В
Humidity	В
Vibration	A
EMC	A
Enclosure	Required protection according to the Rules shall be provided
LIIGOSUIE	upon installation on board
лС data	
Electromagnetic compatibility	Conformance with EMC directive
Noise immunity	EN 61000-6-2
Note	When being exposed to interference, there may be minimal deviations.
Noise emission	



2902030

https://www.phoenixcontact.com/us/products/2902030


Electrostatic discharge  Comments Safety measures must be taken to prevent electrostatic discharge.  Electromagnetic HF field Designation Electromagnetic RF field Standards/regulations En 61000-4-3  Fast transients (burst)  Designation Fast transients (burst)  En 61000-4-3  Standards/regulations En 61000-4-4  Surge current load (surge)  Standards/regulations En 61000-4-5  Conducted interference  Designation Conducted interferences  Standards/regulations En 61000-4-6  Standards/regulations En 61000-4-6  Standards/regulations Electrical isolation  GB Standard  Standards/regulations  Electrical isolation  GB/T 3836.1  GB/T 3836.3  GB/T 3836.4  Ounting  Mounting type DIN rail mounting  Mounting type DIN rail mounting The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.  Mounting position  any		
Comments Safety measures must be taken to prevent electrostatic discharge.  Electromagnetic HF field Designation Electromagnetic RF field Standards/regulations EN 61000-4-3  Fast transients (burst) Designation Fast transients (burst) Standards/regulations EN 61000-4-4  Surge current load (surge) Standards/regulations EN 61000-4-5  Conducted interference Designation Conducted interferences Standards/regulations EN 61000-4-6  andards and regulations Electrical isolation 3-way isolation  GB Standard Standards/regulations GB/T 3836.1 GB/T 3836.3 GB/T 3836.4  Ounting Mounting type DIN rail mounting Assembly note The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	Standards/regulations	EN 61000-4-2
Electromagnetic HF field  Designation Electromagnetic RF field  Standards/regulations EN 61000-4-3  Fast transients (burst)  Designation Fast transients (burst)  Standards/regulations EN 61000-4-4  Surge current load (surge)  Standards/regulations EN 61000-4-5  Conducted interference  Designation Conducted interferences  Standards/regulations EN 61000-4-6  tandards and regulations  Electrical isolation 3-way isolation  GB Standard  Standards/regulations  GB/T 3836.1  GB/T 3836.3  GB/T 3836.4  Ounting  Mounting type DIN rail mounting  The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	Electrostatic discharge	
Designation         Electromagnetic RF field           Standards/regulations         EN 61000-4-3           Fast transients (burst)         Fast transients (burst)           Designation         Fast transients (burst)           Standards/regulations         EN 61000-4-4           Surge current load (surge)         Standards/regulations           Conducted interference         Designation           Designation         Conducted interferences           Standards/regulations         EN 61000-4-6           tandards and regulations         Electrical isolation           GB Standard         GB/T 3836.1           GB/T 3836.3         GB/T 3836.4           counting         Mounting type           Mounting type         DIN rail mounting           Mounting type         DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	Comments	
Standards/regulations	Electromagnetic HF field	
Fast transients (burst)  Designation Fast transients (burst)  Standards/regulations EN 61000-4-4  Surge current load (surge)  Standards/regulations EN 61000-4-5  Conducted interference  Designation Conducted interferences  Standards/regulations EN 61000-4-6  tandards and regulations  Electrical isolation 3-way isolation  GB Standard  Standards/regulations GB/T 3836.1  GB/T 3836.3  GB/T 3836.4  Ounting  Mounting type DIN rail mounting  Assembly note The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	Designation	Electromagnetic RF field
Designation Fast transients (burst) Standards/regulations EN 61000-4-4  Surge current load (surge) Standards/regulations EN 61000-4-5  Conducted interference Designation Conducted interferences Standards/regulations EN 61000-4-6  andards and regulations  Electrical isolation 3-way isolation  GB Standard Standards/regulations GB/T 3836.1  GB/T 3836.3  GB/T 3836.4  Ounting  Mounting type DIN rail mounting  Assembly note The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	Standards/regulations	EN 61000-4-3
Standards/regulations  EN 61000-4-4  Surge current load (surge)  Standards/regulations  EN 61000-4-5  Conducted interference  Designation  Standards/regulations  EN 61000-4-6  andards and regulations  Electrical isolation  3-way isolation  GB Standard  Standards/regulations  GB/T 3836.1  GB/T 3836.3  GB/T 3836.4  Ounting  Mounting type  Assembly note  DIN rail mounting  The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	Fast transients (burst)	
Surge current load (surge)  Standards/regulations  EN 61000-4-5  Conducted interference  Designation  Standards/regulations  EN 61000-4-6  Standards and regulations  Electrical isolation  Standards/regulations  GB Standard  Standards/regulations  GB/T 3836.1  GB/T 3836.3  GB/T 3836.4  Ounting  Mounting type  DIN rail mounting  Assembly note  The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	Designation	Fast transients (burst)
Standards/regulations  EN 61000-4-5  Conducted interference  Designation Conducted interferences  Standards/regulations EN 61000-4-6  Annual and regulations  Electrical isolation 3-way isolation  GB Standard  Standards/regulations  GB/T 3836.1  GB/T 3836.3  GB/T 3836.4  Ounting  Mounting type DIN rail mounting  Assembly note  DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	Standards/regulations	EN 61000-4-4
Standards/regulations  EN 61000-4-5  Conducted interference  Designation Conducted interferences  Standards/regulations EN 61000-4-6  Annual and regulations  Electrical isolation 3-way isolation  GB Standard  Standards/regulations  GB/T 3836.1  GB/T 3836.3  GB/T 3836.4  Ounting  Mounting type DIN rail mounting  Assembly note  DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	Surge current load (surge)	
Designation Conducted interferences  Standards/regulations EN 61000-4-6  tandards and regulations  Electrical isolation 3-way isolation  GB Standard  Standards/regulations GB/T 3836.1  GB/T 3836.3  GB/T 3836.4  Ounting  Mounting type DIN rail mounting  Assembly note The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.		EN 61000-4-5
Standards/regulations  Electrical isolation  GB Standard  Standards/regulations  GB/T 3836.1  GB/T 3836.3  GB/T 3836.4  Ounting  Mounting type  Assembly note  EN 61000-4-6  3-way isolation  GB/T 3836.1  GB/T 3836.3  GB/T 3836.4	Conducted interference	
Electrical isolation  GB Standard  Standards/regulations  GB/T 3836.1  GB/T 3836.3  GB/T 3836.4  Ounting  Mounting type  Assembly note  DIN rail mounting  The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	Designation	Conducted interferences
Electrical isolation  3-way isolation  GB Standard  Standards/regulations  GB/T 3836.1  GB/T 3836.3  GB/T 3836.4   Ounting  Mounting type  DIN rail mounting  Assembly note  DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	Standards/regulations	EN 61000-4-6
GB Standard  Standards/regulations  GB/T 3836.1  GB/T 3836.3  GB/T 3836.4  Ounting  Mounting type  DIN rail mounting  Assembly note  DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	tandards and regulations	
Standards/regulations  GB/T 3836.1  GB/T 3836.3  GB/T 3836.4  Ounting  Mounting type  DIN rail mounting  Assembly note  The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	Electrical isolation	3-way isolation
GB/T 3836.3  GB/T 3836.4  Ounting  Mounting type  DIN rail mounting  Assembly note  The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	GB Standard	
Ounting  Mounting type  DIN rail mounting  Assembly note  DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	Standards/regulations	GB/T 3836.1
Ounting  Mounting type  DIN rail mounting  Assembly note  The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.		GB/T 3836.3
Mounting type  DIN rail mounting  The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.		GB/T 3836.4
Assembly note  The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	ounting	
voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.	Mounting type	DIN rail mounting
Mounting position any	Assembly note	
	Mounting position	any



https://www.phoenixcontact.com/us/products/2902030



## Drawings

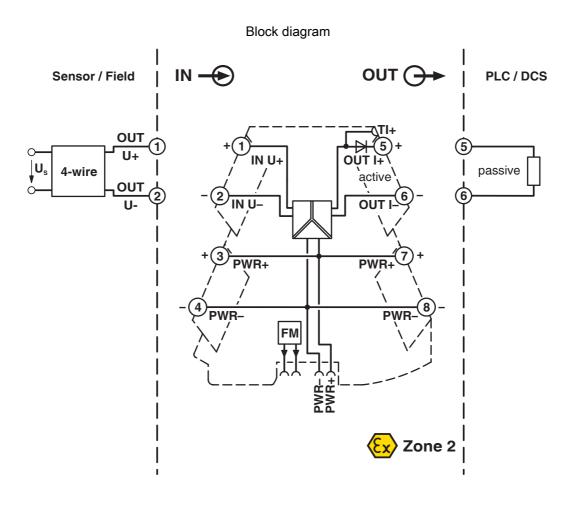



2902030

https://www.phoenixcontact.com/us/products/2902030

### **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2902030



**UL Listed** 

Approval ID: FILE E 238705



cUL Listed

Approval ID: FILE E 238705



Approval ID: TAA00002UA



**IECEx** 

Approval ID: IECEx BVS 19.0041X



cUL Listed

Approval ID: E196811



**UL Listed** 

Approval ID: E196811



ATEX

Approval ID: BVS 19 ATEX E 047 X



EAC Ex

Approval ID: TP012 103.01 00079



CCC

Approval ID: 2022122310115961



2902030

https://www.phoenixcontact.com/us/products/2902030

## Classifications

#### **ECLASS**

	ECLASS-13.0	27210120
	ECLASS-15.0	27210120
ETIM		
	ETIM 9.0	EC002653
	JORGO	
Uľ	NSPSC	
	UNSPSC 21.0	39121000



2902030

https://www.phoenixcontact.com/us/products/2902030

## Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-l
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
	2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol(CAS: 79-94-7)
SCIP	18aadd57-da25-4024-bb94-4afde979faae

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com