



## RP107x SERIES

### OUTPUT CAPACITOR-LESS/LOW VOLTAGE 200mA LDO REGULATOR

NO.EA-181-240607

#### OUTLINE

The RP107x Series are CMOS-based LDO regulators featuring 200mA output.

Since the output capacitor and noise bypass capacitor are able to be reduced and the packages are small DFN(PL)1212-6, WLCSP-4-P5, and SC-88A, high density mounting on boards are possible. The input voltage ( $V_{IN}$ ) is as low as Min.1.4V and the output voltage can be set from 1.0V.

Supply current is as low as 9.5 $\mu$ A compared to existing lines. The CE pin can switch the regulator to standby mode.

#### FEATURES

- Supply Current .....Typ. 9.5 $\mu$ A
- Standby Mode .....Typ. 0.1 $\mu$ A
- Dropout Voltage.....Typ. 0.27V ( $I_{OUT}=200mA$ ,  $V_{OUT}=3.0V$ )
- Ripple Rejection .....Typ. 70dB ( $f=1kHz$ ,  $V_{OUT}\leq 1.2V$ )  
Typ. 65dB ( $f=1kHz$ ,  $1.2V<V_{OUT}<2.2V$ )  
Typ. 60dB ( $f=1kHz$ ,  $V_{OUT}\geq 2.2V$ )
- Temperature-Drift Coefficient of Output Voltage .....Typ.  $\pm 100ppm/^{\circ}C$
- Line Regulation .....Typ. 0.02%/V
- Output Voltage Accuracy ..... $\pm 1.0\%$
- Packages.....WLCSP-4-P5, DFN(PL)1212-6, SC-88A, SOT-23-5
- Input Voltage Range.....1.4V to 5.25V
- Output Voltage Range .....1.0V to 4.2V (0.1V steps)  
(For other voltages, please refer to MARK INFORMATION.)
- Built-in Fold Back Protection Circuit.....Typ. 50mA (Current at short mode)
- Output capacitor free and noise bypass capacitor free

#### APPLICATIONS


- Power source for portable communication equipment.
- Power source for electrical appliances such as cameras, VCRs and camcorders.
- Power source for battery-powered equipment.
- Power source for home appliances.

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

## RP107x

NO.EA-181-240607

## BLOCK DIAGRAMS

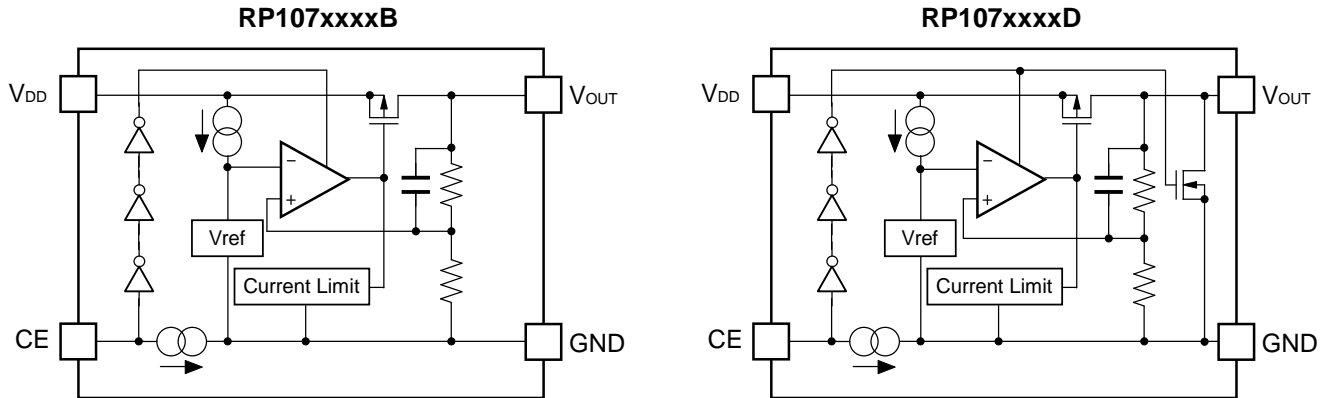

## SELECTION GUIDE

The output voltage, auto discharge function, package, and the taping type, etc. for the ICs can be selected at the user's request.

Product Name	Package	Quantity per Reel	Pb Free	Halogen Free
RP107Zxx1*(y)-TR-F	WLCSP-4-P5	5,000 pcs	Yes	Yes
RP107Kxx1*(y)-TR	DFN(PL)1212-6	5,000 pcs	Yes	Yes
RP107Qxx2*(y)-TR-FE	SC-88A	3,000 pcs	Yes	Yes
RP107Nxx1*(y)-TR-FE	SOT-23-5	3,000 pcs	Yes	Yes

xx: The output voltage ( $V_{OUT}$ ) can be designated in the range from 1.0V to 4.2V in 0.1V steps.

(y): If the output voltage includes the 3<sup>rd</sup> digit, indicate the digit of 0.01V.

1.25V: RP107x12x\*5


1.85V: RP107x18x\*5

2.85V: RP107x28x\*5

\*: Select (B) without auto-discharge function or (D) with auto-discharge function.

\*1 Auto-discharge function quickly lowers the output voltage to 0V by releasing the electrical charge accumulated in the external capacitor when the chip enable signal is switched from the active mode to the standby mode.

## PIN CONFIGURATIONS

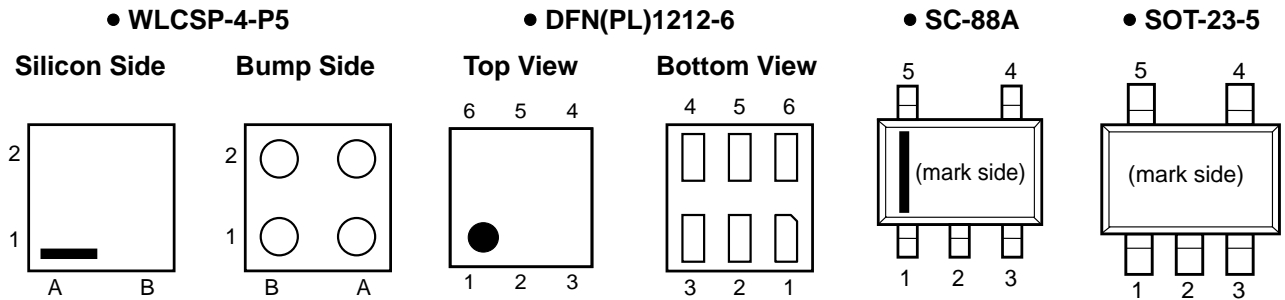

## PIN DESCRIPTIONS

### • WLCSP-4-P5

Pin No	Symbol	Pin Description
A1	$V_{DD}$	Input Pin
A2	$V_{OUT}$	Output Pin
B1	CE	Chip Enable Pin
B2	GND	Ground Pin

### • DFN(PL)1212-6

Pin No	Symbol	Pin Description
1	NC	No Connection
2	GND	Ground Pin
3	CE	Chip Enable Pin
4	$V_{DD}$	Input Pin
5	NC	No Connection
6	$V_{OUT}$	Output Pin

### • SC-88A

Pin No	Symbol	Pin Description
1	CE	Chip Enable Pin
2 *	NC	No Connection
3	GND	Ground Pin
4	$V_{OUT}$	Output Pin
5	$V_{DD}$	Input Pin

\* Pin No. 2 is connected to the bottom of the IC. It is recommended that the pin be connected to the ground plane on the board, or otherwise be left floating so that there is no contact with other potentials.

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

## RP107x

NO.EA-181-240607

### • SOT-23-5

Pin No	Symbol	Pin Description
1	V <sub>DD</sub>	Input Pin
2	GND	Ground Pin
3	CE	Chip Enable Pin
4	NC	No Connection
5	V <sub>OUT</sub>	Output Pin

## ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating	Unit
V <sub>IN</sub>	Input Voltage	6.0	V
V <sub>CE</sub>	Input Voltage (CE Pin)	−0.3 to 6.0	V
V <sub>OUT</sub>	Output Voltage	−0.3 to V <sub>IN</sub> +0.3	V
I <sub>OUT</sub>	Output Current	400	mA
P <sub>D</sub>	Power Dissipation* (WLCSP-4-P5)	278	mW
	Power Dissipation* (DFN(PL)1212-6)	400	
	Power Dissipation* (SC-88A)	380	
	Power Dissipation* (SOT-23-5)	420	
T <sub>opt</sub>	Operating Temperature Range	−40 to 85	°C
T <sub>stg</sub>	Storage Temperature Range	−55 to 125	°C

\*) For Power Dissipation, please refer to PACKAGE INFORMATION.

### ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field.

The functional operation at or over these absolute maximum ratings is not assured.

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

**RP107x**

NO.EA-181-240607

## ELECTRICAL CHARACTERISTICS

### ● RP107xxxxB/D

$V_{IN} = V_{SET} + 1.0V$ ,  $I_{OUT} = 1mA$ ,  $C_{IN} = C_{OUT} = 0.1\mu F$ , unless otherwise noted.

The specifications surrounded by    are guaranteed by Design Engineering at  $-40^{\circ}C \leq T_a \leq 85^{\circ}C$ .

#### RP107x Series

( $T_a = 25^{\circ}C$ )

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
$V_{OUT}$	Output Voltage	$T_a = 25^{\circ}C$	$V_{SET} > 2.0V$	x 0.990	x 1.010	V
			$V_{SET} \leq 2.0V$	-20	+20	mV
		$-40^{\circ}C \leq T_a \leq 85^{\circ}C$	$V_{SET} > 2.0V$	<span style="border: 1px solid black; padding: 0 2px;">x 0.980</span>	<span style="border: 1px solid black; padding: 0 2px;">x 1.015</span>	V
			$V_{SET} \leq 2.0V$	<span style="border: 1px solid black; padding: 0 2px;">-40</span>	<span style="border: 1px solid black; padding: 0 2px;">+30</span>	mV
$I_{OUT}$	Output Current		<span style="border: 1px solid black; padding: 0 2px;">200</span>			mA
$\Delta V_{OUT} / \Delta I_{OUT}$	Load Regulation	$1mA \leq I_{OUT} \leq 200mA$		25	<span style="border: 1px solid black; padding: 0 2px;">50</span>	mV
$V_{DIF}$	Dropout Voltage	Refer to <i>Dropout Voltage Specifications</i> .				
$I_{SS}$	Supply Current ( $I_{OUT}=0mA$ )	$I_{OUT} = 0mA$		9.5	<span style="border: 1px solid black; padding: 0 2px;">25</span>	$\mu A$
$I_{standby}$	Standby Current	$V_{CE} = GND$		0.1	3.0	$\mu A$
$\Delta V_{OUT} / \Delta V_{IN}$	Line Regulation	$V_{SET} + 0.5V \leq V_{IN} \leq 5V$ $I_{OUT} = 1mA$		$\pm 0.02$	<span style="border: 1px solid black; padding: 0 2px;"><math>\pm 0.20</math></span>	%/V
RR	Ripple Rejection	$f = 1kHz$ ( $V_{OUT} \leq 1.2V$ ) $f = 1kHz$ ( $1.2V < V_{OUT} < 2.2V$ ) $f = 1kHz$ ( $V_{OUT} \leq 2.2V$ ) Ripple 0.2Vp-p $V_{IN} = V_{SET} + 1.0V$ $I_{OUT} = 30mA$ Note: When $V_{OUT} \leq 1.2V$ , $V_{IN} = 2.2V$ .		70 65 60		dB
$V_{IN}$	Input Voltage		<span style="border: 1px solid black; padding: 0 2px;">1.4</span>		<span style="border: 1px solid black; padding: 0 2px;">5.25</span>	V
$\Delta V_{OUT} / \Delta T_a$	Output Voltage Temperature Coefficient	$-40^{\circ}C \leq T_a \leq 85^{\circ}C$		$\pm 100$		ppm/ $^{\circ}C$
$I_{SC}$	Short Current Limit	$V_{OUT} = 0V$		50		mA
$I_{CEPD}$	CE Pull-down Current			0.1		$\mu A$
$V_{CEH}$	CE Input Voltage "H"		<span style="border: 1px solid black; padding: 0 2px;">1.0</span>			V
$V_{CEL}$	CE Input Voltage "L"				<span style="border: 1px solid black; padding: 0 2px;">0.4</span>	V
$R_{LOW}$	Auto-discharge Nch ON Resistance (D version only)	$V_{IN} = 4.0V$ $V_{CE} = 0V$		30		$\Omega$

All test items listed under [7] *Electrical Characteristics* are done under the pulse load condition ( $T_j \approx T_a = 25^{\circ}C$ ) except for Ripple Rejection and Output Voltage Temperature Coefficient.

\*3  $V_{SET}$  = Set Output Voltage

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

## RP107x

NO.EA-181-240607

The specifications surrounded by   are guaranteed by Design Engineering at  $-40^{\circ}\text{C} \leq T_a \leq 85^{\circ}\text{C}$ .

### Dropout Voltage Specifications


( $T_a=25^{\circ}\text{C}$ )

Output Voltage $V_{\text{SET}}$ (V)	Dropout Voltage $V_{\text{DIF}}$ (V)		
	Condition	Typ.	Max.
$1.0 \leq V_{\text{SET}} < 1.1$	$I_{\text{OUT}} = 200\text{mA}$	0.64	<span style="border: 1px solid black; padding: 0 2px;">0.92</span>
$1.1 \leq V_{\text{SET}} < 1.2$		0.59	<span style="border: 1px solid black; padding: 0 2px;">0.84</span>
$1.2 \leq V_{\text{SET}} < 1.5$		0.55	<span style="border: 1px solid black; padding: 0 2px;">0.76</span>
$1.5 \leq V_{\text{SET}} < 2.0$		0.44	<span style="border: 1px solid black; padding: 0 2px;">0.60</span>
$2.0 \leq V_{\text{SET}} < 2.6$		0.35	<span style="border: 1px solid black; padding: 0 2px;">0.49</span>
$2.6 \leq V_{\text{SET}}$		0.27	<span style="border: 1px solid black; padding: 0 2px;">0.36</span>

### RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

## TYPICAL APPLICATION

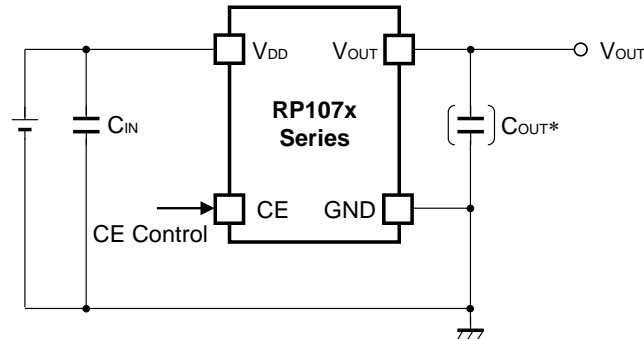

## TECHNICAL NOTES


When using the RP107x Series, please note the following points.

### \*Phase Compensation

The RP107x Series are using an output capacitor as phase compensation to ensure a stable operation even if the output load fluctuates. To reduce the output voltage fluctuation, it is imperative that a 0.1μF to 10μF output capacitor be used. When doing so, please note the following three points.

1. If the output capacitor is 2.2μF or more and the output current is 0.01mA or less<sup>\*1</sup>, the noise level may increase beyond 40μV, therefore, it is imperative that the stability of operation including the frequency characteristics be evaluated.
2. If the output capacitor is 0.01μF or less and the output current is 0.1mA or less<sup>\*2</sup>, the exogenous noise occurred in the other circuits may give some impacts on the noise level, therefore it is imperative that the enough measures be taken such as to make GND lowered.

As for 1 and 2, please refer to the chart of the External Capacitor vs. Output Voltage.

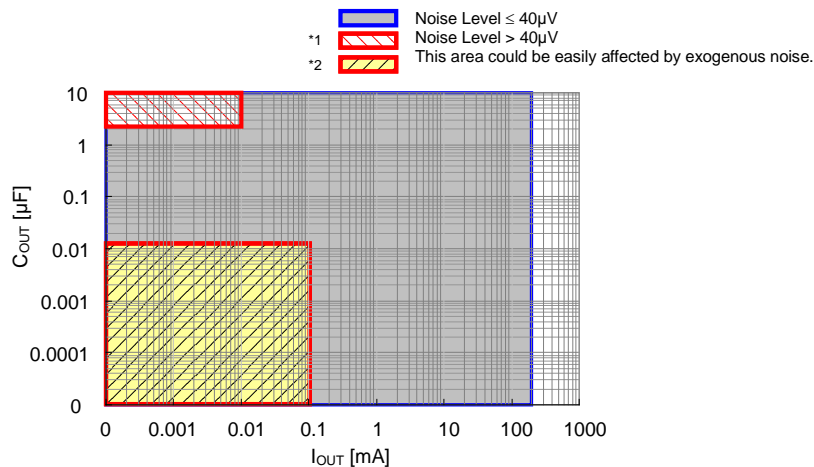

External Capacitor vs. Output Voltage

3. In case of using a tantalum capacitor, the output may oscillate if the effective series resistance (ESR) is high, therefore, it is imperative that the ESR vs. Frequency be considered.

### PCB Layout

If the impedances of VDD and GND lines are high, the ICs may pick up noise or may cause unstable operation when the current flows. Therefore, make VDD and GND the lowest possible. Also, place a 0.1μF or more CIN capacitor between VDD pin and GND pin as close as possible to each other.

## RP107x


NO.EA-181-240607

### CONSTANT SLOPE CIRCUITS

The RP107x Series is equipped with a constant slope circuit as a soft-start circuit, which allows the output voltage to start up gradually when the CE is turned on. The constant slope circuit minimizes the inrush current at the start-up and also prevents the overshoot of the output voltage. The capacitor to create the start-up slope is built in the IC that does not require any external components. The start-up time and the start-up slope angle are fixed inside the IC.

If the capacitance of the external output capacitor ( $C_{OUT}$ ) becomes more than the certain capacitance, the output current limit circuit minimizes the incoming current of the output capacitor at the start-up. As a result, the start-up time becomes longer and the start-up slope angle becomes more gentle. As "Inrush Current Characteristics Example" below shows, if the  $C_{OUT}$  is less than  $2.2\mu\text{F}$ , the constant slope circuit easily starts to function at the start-up, likewise, if the  $C_{OUT}$  is over  $4.7\mu\text{F}$ , the output current limit circuit easily starts to function at the start-up. The boundary point of using these two circuits is inversely proportional to the output voltage. If the output voltage is higher, the output current limit circuit easily starts to function even if the  $C_{OUT}$  capacitance is small. For more details, please refer to the graph 15 of "Inrush Current Characteristics Example".

Inrush Current Characteristics Example ( $C_1=0.1\mu\text{F}$ ,  $T_{opt}=25^\circ\text{C}$ )

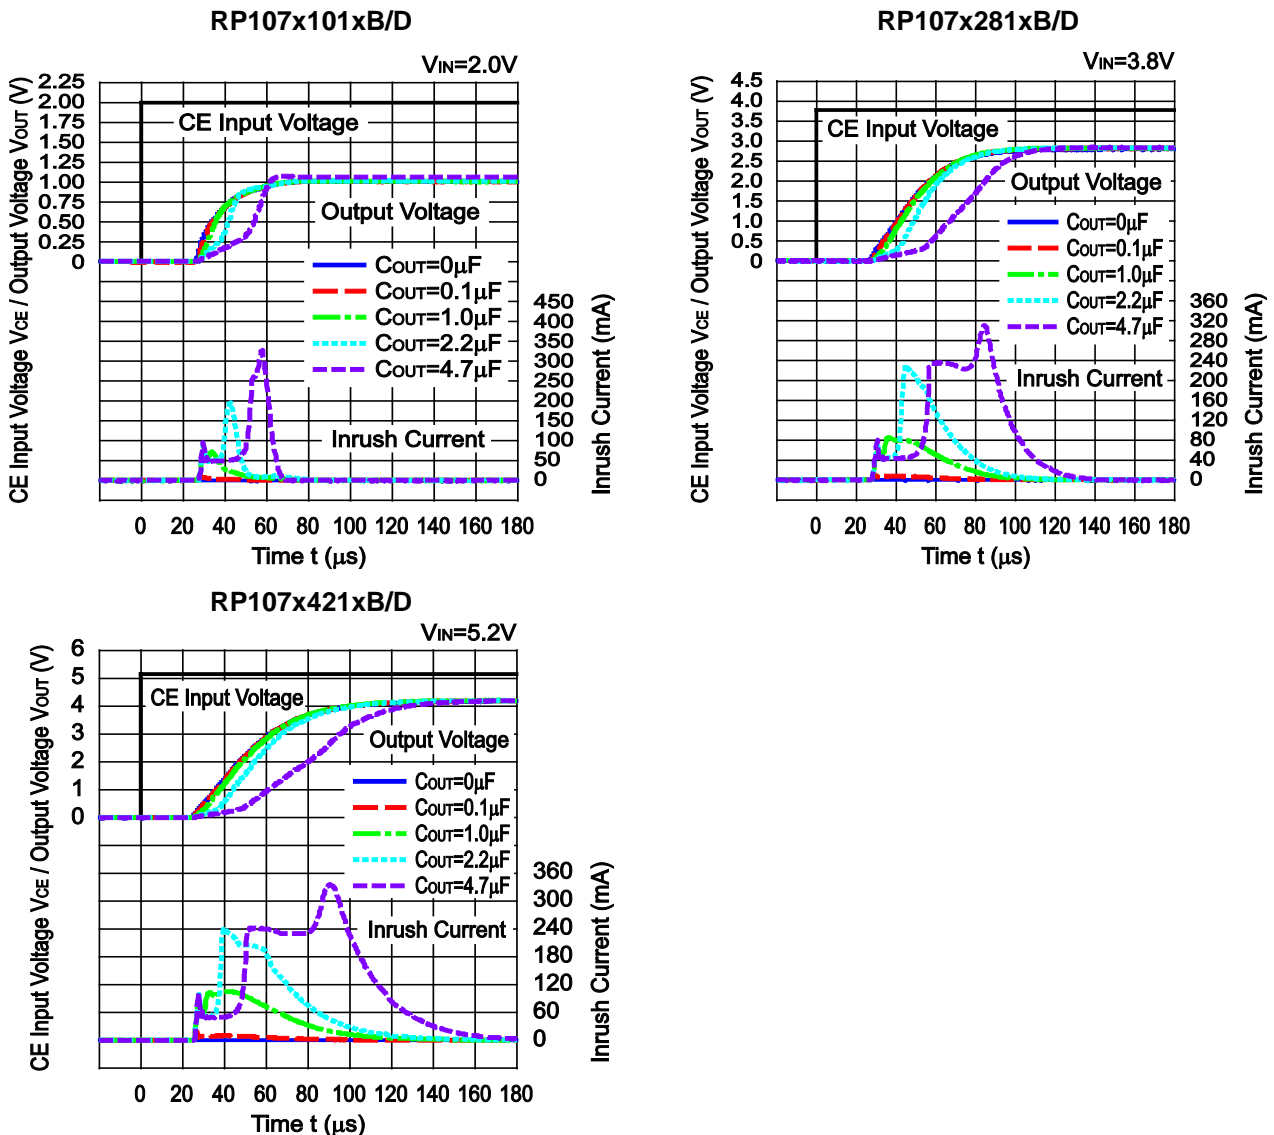

## PACKAGE INFORMATION

### • Power Dissipation (WLCSP-4-P5)

Power Dissipation ( $P_D$ ) depends on conditions of mounting on board. This specification is based on the Measurement Conditions below.


#### Measurement Conditions

	Standard Land Pattern
Environment	Mounting on Board (Wind Velocity=0m/s)
Board Material	Glass Cloth Epoxy Plastic (Double-sided)
Board Dimensions	40mm x 40mm x 1.6mm
Copper Ratio	Topside: Approx. 50%, Backside: Approx. 50%
Through-hole	$\phi$ 0.5mm x 28pcs


#### Measurement Result

( $T_a=25^\circ\text{C}$ ,  $T_{j\text{max}}=125^\circ\text{C}$ )

	Standard Land Pattern
Power Dissipation	278mW
Thermal Resistance	$\theta_{ja}=(125-25^\circ\text{C})/0.278\text{W}=360^\circ\text{C/W}$
	$\theta_{jc}=46^\circ\text{C/W}$

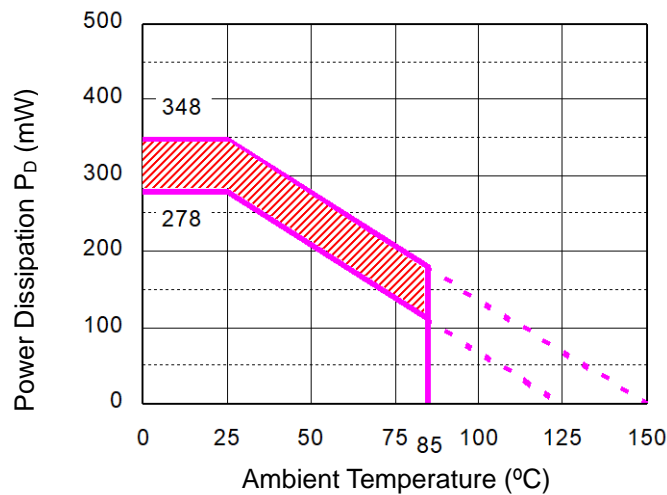

Power Dissipation

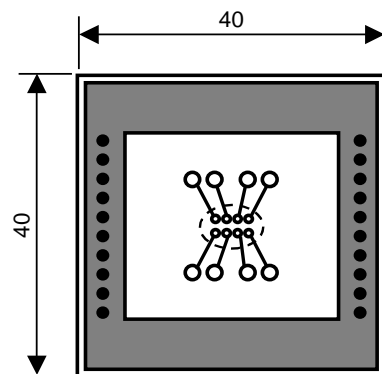

Measurement Board Pattern

○ IC Mount Area (Unit: mm)

The above graph shows the Power Dissipation of the WLCSP-4-P5 package based on  $T_{j\text{max}}=125^\circ\text{C}$  and  $T_{j\text{max}}=150^\circ\text{C}$ . Operating the ICs within the shaded area in the graph might have an influence on the lifetime of the ICs. Operating time must be within the time limit described in the table below.


Operating Time	Estimated Years (Operating 4 hrs/ day)
13,000 Hours	9 Years

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

## RP107x


NO.EA-181-240607

### • Package Dimensions (WLCSP-4-P5)

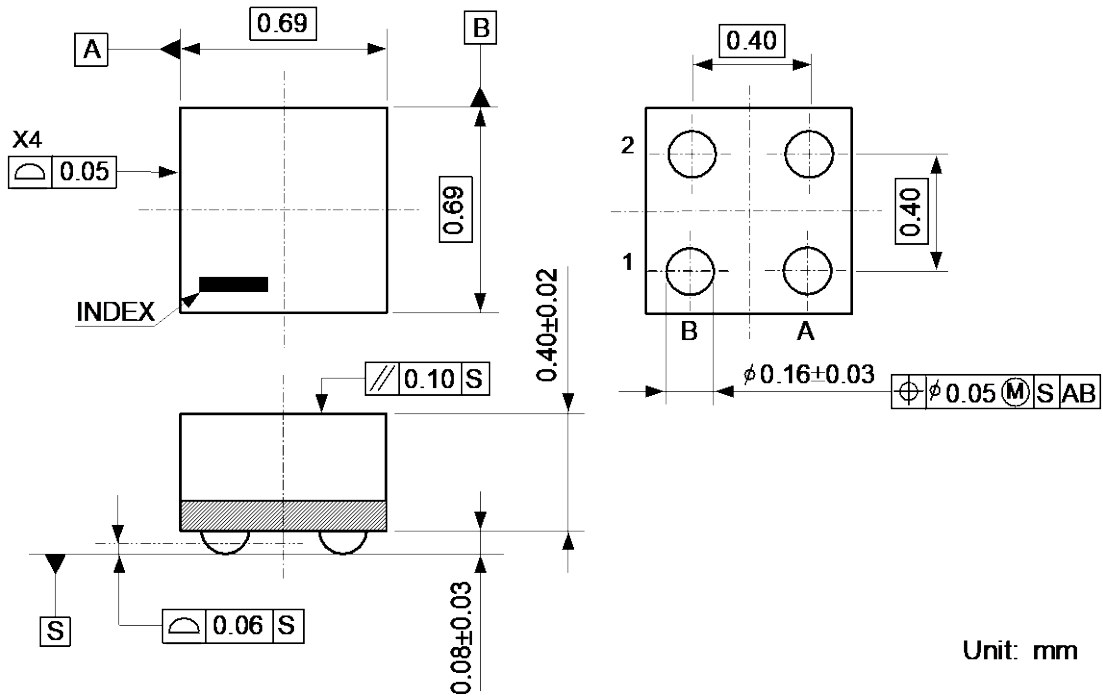

### • Mark Specification (WLCSP-4-P5)

①②: Lot Number ... Alphanumeric Serial Number



\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

**RP107x**

NO.EA-181-240607

● **RP107Z Series Mark Specification Table (WLCSP-4-P5)**

RP107ZxxxB		RP107ZxxxD	
Product Name	V <sub>SET</sub>	Product Name	V <sub>SET</sub>
RP107Z101B	1.0V	RP107Z101D	1.0V
RP107Z111B	1.1V	RP107Z111D	1.1V
RP107Z121B	1.2V	RP107Z121D	1.2V
RP107Z131B	1.3V	RP107Z131D	1.3V
RP107Z141B	1.4V	RP107Z141D	1.4V
RP107Z151B	1.5V	RP107Z151D	1.5V
RP107Z161B	1.6V	RP107Z161D	1.6V
RP107Z171B	1.7V	RP107Z171D	1.7V
RP107Z181B	1.8V	RP107Z181D	1.8V
RP107Z191B	1.9V	RP107Z191D	1.9V
RP107Z201B	2.0V	RP107Z201D	2.0V
RP107Z211B	2.1V	RP107Z211D	2.1V
RP107Z221B	2.2V	RP107Z221D	2.2V
RP107Z231B	2.3V	RP107Z231D	2.3V
RP107Z241B	2.4V	RP107Z241D	2.4V
RP107Z251B	2.5V	RP107Z251D	2.5V
RP107Z261B	2.6V	RP107Z261D	2.6V
RP107Z271B	2.7V	RP107Z271D	2.7V
RP107Z281B	2.8V	RP107Z281D	2.8V
RP107Z291B	2.9V	RP107Z291D	2.9V
RP107Z301B	3.0V	RP107Z301D	3.0V
RP107Z311B	3.1V	RP107Z311D	3.1V
RP107Z321B	3.2V	RP107Z321D	3.2V
RP107Z331B	3.3V	RP107Z331D	3.3V
RP107Z341B	3.4V	RP107Z341D	3.4V
RP107Z351B	3.5V	RP107Z351D	3.5V
RP107Z361B	3.6V	RP107Z361D	3.6V
RP107Z371B	3.7V	RP107Z371D	3.7V
RP107Z381B	3.8V	RP107Z381D	3.8V
RP107Z391B	3.9V	RP107Z391D	3.9V
RP107Z401B	4.0V	RP107Z401D	4.0V
RP107Z411B	4.1V	RP107Z411D	4.1V
RP107Z421B	4.2V	RP107Z421D	4.2V
RP107Z121B5	1.25V	RP107Z121D5	1.25V
RP107Z181B5	1.85V	RP107Z181D5	1.85V
RP107Z281B5	2.85V	RP107Z281D5	2.85V

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

## RP107x

NO.EA-181-240607

### • Power Dissipation (DFN(PL)1212-6)

Power Dissipation ( $P_D$ ) depends on conditions of mounting on board. This specification is based on the Measurement Conditions below.


#### Measurement Conditions

	Standard Land Pattern
Environment	Mounting on Board (Wind Velocity=0m/s)
Board Material	Glass Cloth Epoxy Plastic (Double-sided)
Board Dimensions	40mm x 40mm x 1.6mm
Copper Ratio	Topside: Approx. 50%, Backside: Approx. 50%
Through-holes	φ 0.54mm x 28pcs


#### Measurement Result

( $T_a=25^{\circ}\text{C}$ ,  $T_{j\text{max}}=125^{\circ}\text{C}$ )

	Standard Land Pattern
Power Dissipation	400mW
Thermal Resistance	$\theta_{ja} = (125-25^{\circ}\text{C})/0.4\text{W} = 250^{\circ}\text{C/W}$
	$\theta_{jc} = 67^{\circ}\text{C/W}$

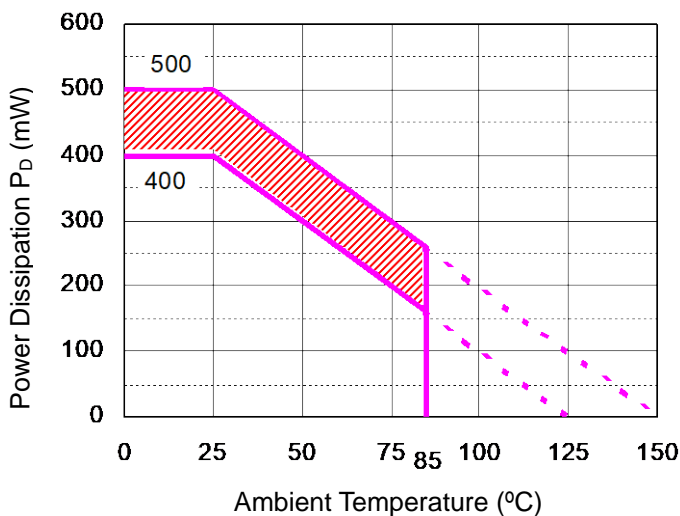

#### Power Dissipation

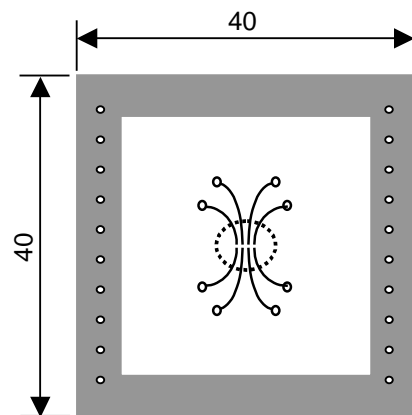

#### Measurement Board Pattern

○ IC Mount Area (Unit: mm)

The above graph shows the Power Dissipation of the DFN(PL)1212-6 package based on  $T_{j\text{max}}=125^{\circ}\text{C}$  and  $T_{j\text{max}}=150^{\circ}\text{C}$ . Operating the ICs within the shaded area in the graph might have an influence on the lifetime of the ICs. Operating time must be within the time limit described in the table below.


Operating Time	Estimated Years (Operating 4 hrs/ day)
13,000 Hours	9 Years

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

**RP107x**


NO.EA-181-240607

• **Package Dimensions (DFN(PL)1212-6)**

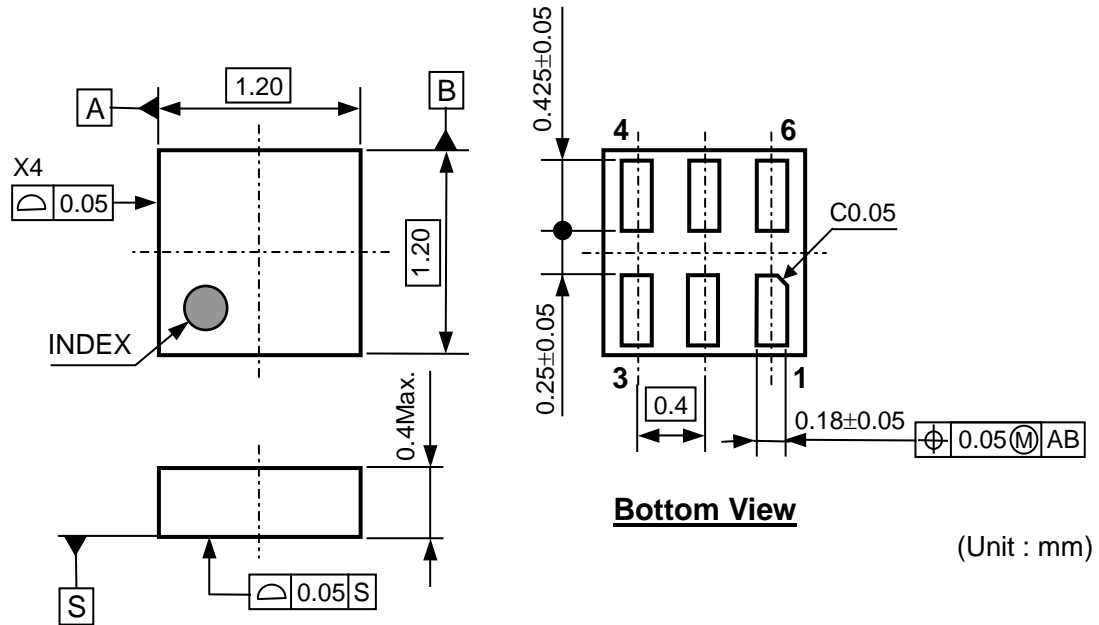

• **Mark Specification (DFN(PL)1212-6)**

- ①②: Product Code ... Refer to RP107K Series Mark Specification Table.  
 ③④: Lot Number ... Alphanumeric Serial Number



\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

## RP107x

NO.EA-181-240607

### ● RP107K Series Mark Specification Table (DFN(PL)1212-6)

RP107KxxxB			RP107KxxxD		
Product Name	①②	V <sub>SET</sub>	Product Name	①②	V <sub>SET</sub>
RP107K101B	J A	1.0V	RP107K101D	L A	1.0V
RP107K111B	J B	1.1V	RP107K111D	L B	1.1V
RP107K121B	J C	1.2V	RP107K121D	L C	1.2V
RP107K131B	J D	1.3V	RP107K131D	L D	1.3V
RP107K141B	J E	1.4V	RP107K141D	L E	1.4V
RP107K151B	J F	1.5V	RP107K151D	L F	1.5V
RP107K161B	J G	1.6V	RP107K161D	L G	1.6V
RP107K171B	J H	1.7V	RP107K171D	L H	1.7V
RP107K181B	J J	1.8V	RP107K181D	L J	1.8V
RP107K191B	J K	1.9V	RP107K191D	L K	1.9V
RP107K201B	J L	2.0V	RP107K201D	L L	2.0V
RP107K211B	J M	2.1V	RP107K211D	L M	2.1V
RP107K221B	J N	2.2V	RP107K221D	L N	2.2V
RP107K231B	J P	2.3V	RP107K231D	L P	2.3V
RP107K241B	J Q	2.4V	RP107K241D	L Q	2.4V
RP107K251B	J R	2.5V	RP107K251D	L R	2.5V
RP107K261B	J A	2.6V	RP107K261D	L A	2.6V
RP107K271B	J T	2.7V	RP107K271D	L T	2.7V
RP107K281B	J U	2.8V	RP107K281D	L U	2.8V
RP107K291B	J V	2.9V	RP107K291D	L V	2.9V
RP107K301B	J W	3.0V	RP107K301D	L W	3.0V
RP107K311B	J X	3.1V	RP107K311D	L X	3.1V
RP107K321B	J Y	3.2V	RP107K321D	L Y	3.2V
RP107K331B	J Z	3.3V	RP107K331D	L Z	3.3V
RP107K341B	K A	3.4V	RP107K341D	M A	3.4V
RP107K351B	K B	3.5V	RP107K351D	M B	3.5V
RP107K361B	K C	3.6V	RP107K361D	M C	3.6V
RP107K371B	K D	3.7V	RP107K371D	M D	3.7V
RP107K381B	K E	3.8V	RP107K381D	M E	3.8V
RP107K391B	K F	3.9V	RP107K391D	M F	3.9V
RP107K401B	K G	4.0V	RP107K401D	M G	4.0V
RP107K411B	K H	4.1V	RP107K411D	M H	4.1V
RP107K421B	K J	4.2V	RP107K421D	M J	4.2V
RP107K121B5	K K	1.25V	RP107K121D5	M K	1.25V
RP107K181B5	K L	1.85V	RP107K181D5	M L	1.85V
RP107K281B5	K M	2.85V	RP107K281D5	M M	2.85V

## • Power Dissipation (SC-88A)

Power Dissipation ( $P_D$ ) depends on conditions of mounting on board. This specification is based on the Measurement Conditions below.


### Measurement Conditions

	Standard Land Pattern
Environment	Mounting on Board (Wind Velocity=0m/s)
Board Material	Glass Cloth Epoxy Plastic (Double-sided)
Board Dimensions	40mm x 40mm x 1.6mm
Copper Ratio	Topside: Approx. 50%, Backside: Approx. 50%
Through-hole	$\phi 0.5\text{mm} \times 44\text{pcs}$


### Measurement Result

( $T_a=25^\circ\text{C}$ ,  $T_{j\text{max}}=125^\circ\text{C}$ )

	Standard Land Pattern	Free Air
Power Dissipation	380mW	150mW
Thermal Resistance	$\theta_{ja} = (125-25^\circ\text{C})/0.38\text{W} = 263^\circ\text{C/W}$ $\theta_{jc} = 75^\circ\text{C/W}$	$\theta_{ja} = (125-25^\circ\text{C})/0.15\text{W} = 667^\circ\text{C/W}$ -

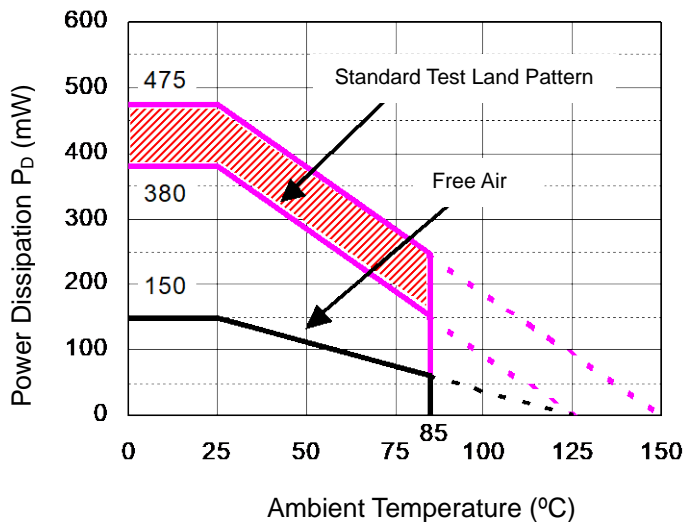

Power Dissipation

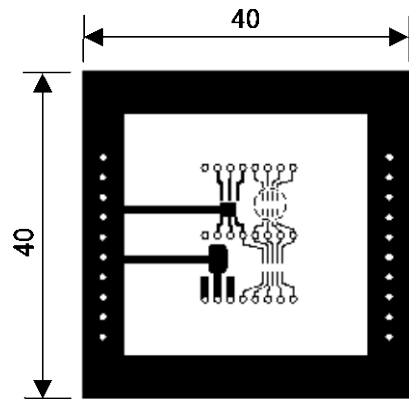

Measurement Board Pattern

○ IC Mount Area (Unit: mm)

The above graph shows the Power Dissipation of the SC-88A package based on  $T_{j\text{max}}=125^\circ\text{C}$  and  $T_{j\text{max}}=150^\circ\text{C}$ . Operating the ICs within the shaded area in the graph might have an influence on the lifetime of the ICs. Operating time must be within the time limit described in the table below.


Operating Time	Estimated Years (Operating 4 hrs/ day)
13,000 Hours	9 Years

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

## RP107x

NO.EA-181-240607


### • Package Dimensions (SC-88A)

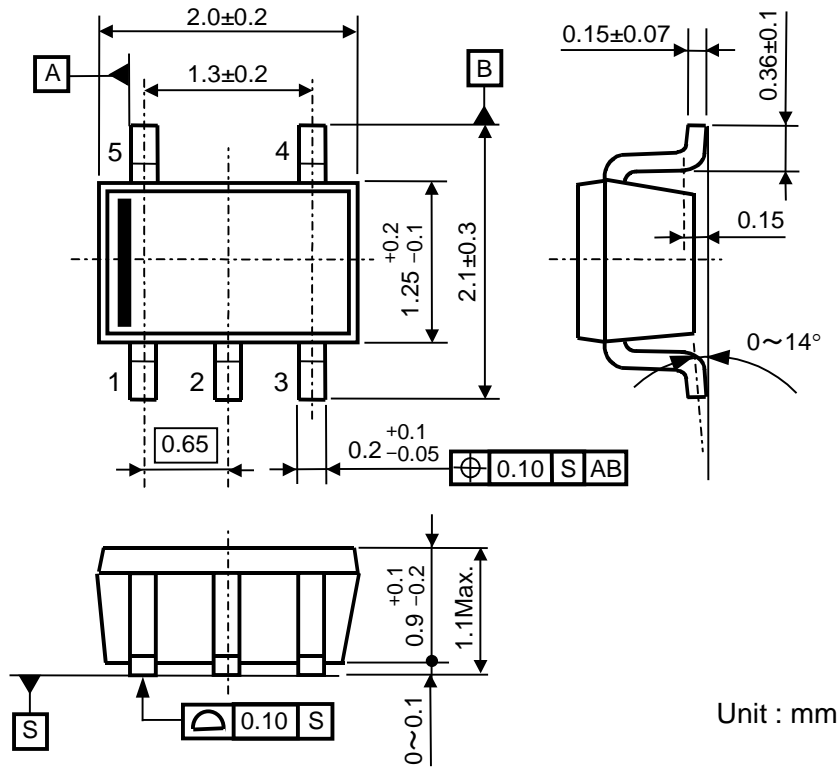

### • Mark Specification (SC-88A)

①②③④: Product Code ... Refer to RP107Q Series Mark Specification Table.

⑤⑥: Lot Number ... Alphanumeric Serial Number

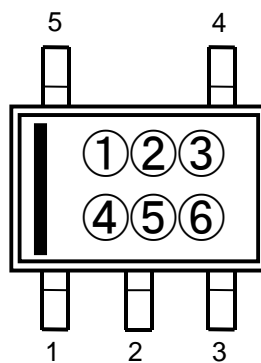

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

**RP107x**

NO.EA-181-240607

● **RP107Q Series Mark Specification Table (SC-88A)**

**RP107QxxxB**

Product Name	①②③④	V <sub>SET</sub>
RP107Q101B	<b>N 0 1 0</b>	1.0V
RP107Q111B	<b>N 0 1 1</b>	1.1V
RP107Q121B	<b>N 0 1 2</b>	1.2V
RP107Q131B	<b>N 0 1 3</b>	1.3V
RP107Q141B	<b>N 0 1 4</b>	1.4V
RP107Q151B	<b>N 0 1 5</b>	1.5V
RP107Q161B	<b>N 0 1 6</b>	1.6V
RP107Q171B	<b>N 0 1 7</b>	1.7V
RP107Q181B	<b>N 0 1 8</b>	1.8V
RP107Q191B	<b>N 0 1 9</b>	1.9V
RP107Q201B	<b>N 0 2 0</b>	2.0V
RP107Q211B	<b>N 0 2 1</b>	2.1V
RP107Q221B	<b>N 0 2 2</b>	2.2V
RP107Q231B	<b>N 0 2 3</b>	2.3V
RP107Q241B	<b>N 0 2 4</b>	2.4V
RP107Q251B	<b>N 0 2 5</b>	2.5V
RP107Q261B	<b>N 0 2 6</b>	2.6V
RP107Q271B	<b>N 0 2 7</b>	2.7V
RP107Q281B	<b>N 0 2 8</b>	2.8V
RP107Q291B	<b>N 0 2 9</b>	2.9V
RP107Q301B	<b>N 0 3 0</b>	3.0V
RP107Q311B	<b>N 0 3 1</b>	3.1V
RP107Q321B	<b>N 0 3 2</b>	3.2V
RP107Q331B	<b>N 0 3 3</b>	3.3V
RP107Q341B	<b>N 0 3 4</b>	3.4V
RP107Q351B	<b>N 0 3 5</b>	3.5V
RP107Q361B	<b>N 0 3 6</b>	3.6V
RP107Q371B	<b>N 0 3 7</b>	3.7V
RP107Q381B	<b>N 0 3 8</b>	3.8V
RP107Q391B	<b>N 0 3 9</b>	3.9V
RP107Q401B	<b>N 0 4 0</b>	4.0V
RP107Q411B	<b>N 0 4 1</b>	4.1V
RP107Q421B	<b>N 0 4 2</b>	4.2V
RP107Q121B5	<b>N 0 4 3</b>	1.25V
RP107Q181B5	<b>N 0 4 4</b>	1.85V
RP107Q281B5	<b>N 0 4 5</b>	2.85V

**RP107QxxxD**

Product Name	①②③④	V <sub>SET</sub>
RP107Q101D	<b>P 0 1 0</b>	1.0V
RP107Q111D	<b>P 0 1 1</b>	1.1V
RP107Q121D	<b>P 0 1 2</b>	1.2V
RP107Q131D	<b>P 0 1 3</b>	1.3V
RP107Q141D	<b>P 0 1 4</b>	1.4V
RP107Q151D	<b>P 0 1 5</b>	1.5V
RP107Q161D	<b>P 0 1 6</b>	1.6V
RP107Q171D	<b>P 0 1 7</b>	1.7V
RP107Q181D	<b>P 0 1 8</b>	1.8V
RP107Q191D	<b>P 0 1 9</b>	1.9V
RP107Q201D	<b>P 0 2 0</b>	2.0V
RP107Q211D	<b>P 0 2 1</b>	2.1V
RP107Q221D	<b>P 0 2 2</b>	2.2V
RP107Q231D	<b>P 0 2 3</b>	2.3V
RP107Q241D	<b>P 0 2 4</b>	2.4V
RP107Q251D	<b>P 0 2 5</b>	2.5V
RP107Q261D	<b>P 0 2 6</b>	2.6V
RP107Q271D	<b>P 0 2 7</b>	2.7V
RP107Q281D	<b>P 0 2 8</b>	2.8V
RP107Q291D	<b>P 0 2 9</b>	2.9V
RP107Q301D	<b>P 0 3 0</b>	3.0V
RP107Q311D	<b>P 0 3 1</b>	3.1V
RP107Q321D	<b>P 0 3 2</b>	3.2V
RP107Q331D	<b>P 0 3 3</b>	3.3V
RP107Q341D	<b>P 0 3 4</b>	3.4V
RP107Q351D	<b>P 0 3 5</b>	3.5V
RP107Q361D	<b>P 0 3 6</b>	3.6V
RP107Q371D	<b>P 0 3 7</b>	3.7V
RP107Q381D	<b>P 0 3 8</b>	3.8V
RP107Q391D	<b>P 0 3 9</b>	3.9V
RP107Q401D	<b>P 0 4 0</b>	4.0V
RP107Q411D	<b>P 0 4 1</b>	4.1V
RP107Q421D	<b>P 0 4 2</b>	4.2V
RP107Q121D5	<b>P 0 4 3</b>	1.25V
RP107Q181D5	<b>P 0 4 4</b>	1.85V
RP107Q281D5	<b>P 0 4 5</b>	2.85V

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

## RP107x

NO.EA-181-240607

### • Power Dissipation (SOT-23-5)

Power Dissipation ( $P_D$ ) depends on conditions of mounting on board. This specification is based on the Measurement Conditions below. (Power Dissipation (SOT-23-5) is substitution of SOT-23-6.)


Measurement Conditions:

	Standard Land Pattern
Environment	Mounting on Board (Wind Velocity=0m/s)
Board Material	Glass Cloth Epoxy Plastic (Double-sided)
Board Dimensions	40mm x 40mm x 1.6mm
Copper Ratio	Topside: Approx. 50%, Backside: Approx. 50%
Through-holes	φ 0.5mm x 44pcs


Measurement Results:

( $T_a=25^{\circ}\text{C}$ ,  $T_{j\text{max}}=125^{\circ}\text{C}$ )

	Standard Land Pattern	Free Air
Power Dissipation	420mW	250mW
Thermal Resistance	$\theta_{ja}=(125-25^{\circ}\text{C})/0.42\text{W}=238^{\circ}\text{C/W}$	$400^{\circ}\text{C/W}$

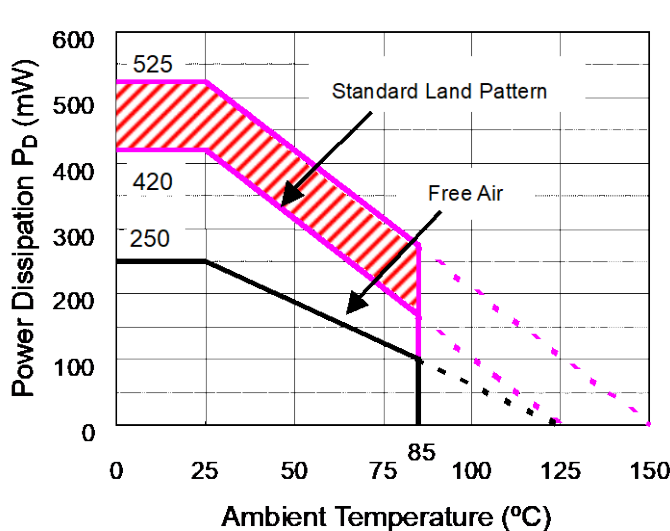

Power Dissipation

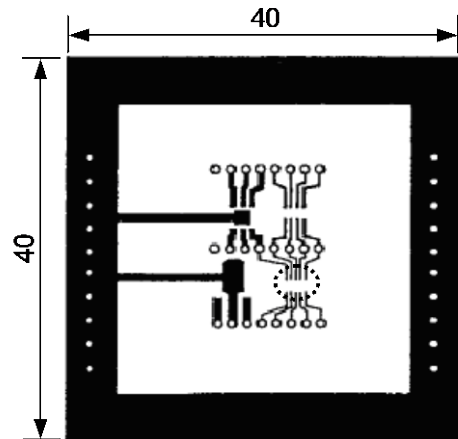

Measurement Board Pattern

○ IC Mount Area (Unit: mm)

The above graph shows the Power Dissipation of the SOT-23-5 package based on  $T_{j\text{max}}=125^{\circ}\text{C}$  and  $T_{j\text{max}}=150^{\circ}\text{C}$ . Operating the ICs within the shaded area in the graph might have an influence on the lifetime of the ICs. Operating time must be within the time limit described in the table below.


Operating Time	Estimated Years (Operating 4 hrs/ day)
9,000 Hours	6 Years

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
\*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

RP107x


NO.EA-181-240607

• Package Dimensions (SOT-23-5)

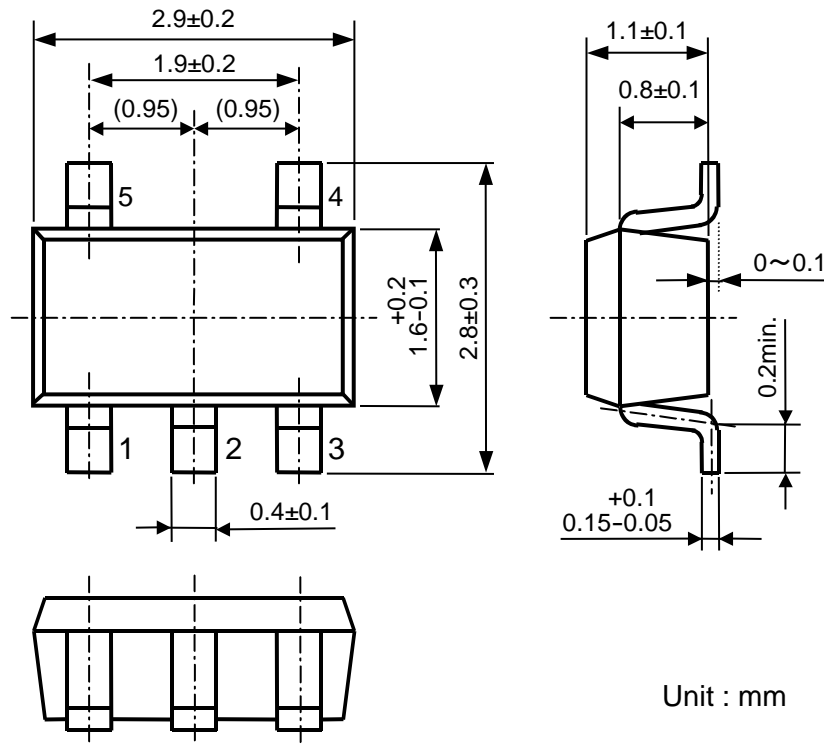

• Mark Specification (SOT-23-5)

- ①②③: Product Code ... Refer to RP107N Series Mark Specification Table.  
④⑤: Lot Number ... Alphanumeric Serial Number

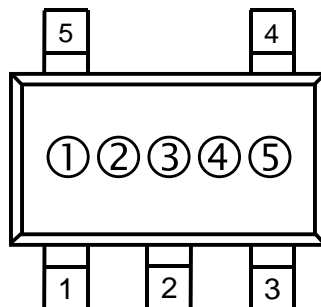

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.


## RP107x

NO.EA-181-240607


### • RP107N Series Mark Specification Table (SOT-23-5)

RP107NxxxB			RP107NxxxD		
Product Name	①②③	V <sub>SET</sub>	Product Name	①②③	V <sub>SET</sub>
RP107N101B	A A A	1.0V	RP107N101D	A B A	1.0V
RP107N111B	A A B	1.1V	RP107N111D	A B B	1.1V
RP107N121B	A A C	1.2V	RP107N121D	A B C	1.2V
RP107N131B	A A D	1.3V	RP107N131D	A B D	1.3V
RP107N141B	A A E	1.4V	RP107N141D	A B E	1.4V
RP107N151B	A A F	1.5V	RP107N151D	A B F	1.5V
RP107N161B	A A G	1.6V	RP107N161D	A B G	1.6V
RP107N171B	A A H	1.7V	RP107N171D	A B H	1.7V
RP107N181B	A A J	1.8V	RP107N181D	A B J	1.8V
RP107N191B	A A K	1.9V	RP107N191D	A B K	1.9V
RP107N201B	A A L	2.0V	RP107N201D	A B L	2.0V
RP107N211B	A A M	2.1V	RP107N211D	A B M	2.1V
RP107N221B	A A N	2.2V	RP107N221D	A B N	2.2V
RP107N231B	A A P	2.3V	RP107N231D	A B P	2.3V
RP107N241B	A A Q	2.4V	RP107N241D	A B Q	2.4V
RP107N251B	A A R	2.5V	RP107N251D	A B R	2.5V
RP107N261B	A A S	2.6V	RP107N261D	A B S	2.6V
RP107N271B	A A T	2.7V	RP107N271D	A B T	2.7V
RP107N281B	A A U	2.8V	RP107N281D	A B U	2.8V
RP107N291B	A A V	2.9V	RP107N291D	A B V	2.9V
RP107N301B	A A W	3.0V	RP107N301D	A B W	3.0V
RP107N311B	A A X	3.1V	RP107N311D	A B X	3.1V
RP107N321B	A A Y	3.2V	RP107N321D	A B Y	3.2V
RP107N331B	A A Z	3.3V	RP107N331D	A B Z	3.3V
RP107N341B	B A A	3.4V	RP107N341D	B B A	3.4V
RP107N351B	B A B	3.5V	RP107N351D	B B B	3.5V
RP107N361B	B A C	3.6V	RP107N361D	B B C	3.6V
RP107N371B	B A D	3.7V	RP107N371D	B B D	3.7V
RP107N381B	B A E	3.8V	RP107N381D	B B E	3.8V
RP107N391B	B A F	3.9V	RP107N391D	B B F	3.9V
RP107N401B	B A G	4.0V	RP107N401D	B B G	4.0V
RP107N411B	B A H	4.1V	RP107N411D	B B H	4.1V
RP107N421B	B A J	4.2V	RP107N421D	B B J	4.2V
RP107N121B5	B A K	1.25V	RP107N121D5	B B K	1.25V
RP107N181B5	B A L	1.85V	RP107N181D5	B B L	1.85V
RP107N281B5	B A M	2.85V	RP107N281D5	B B M	2.85V


## TEST CIRCUITS

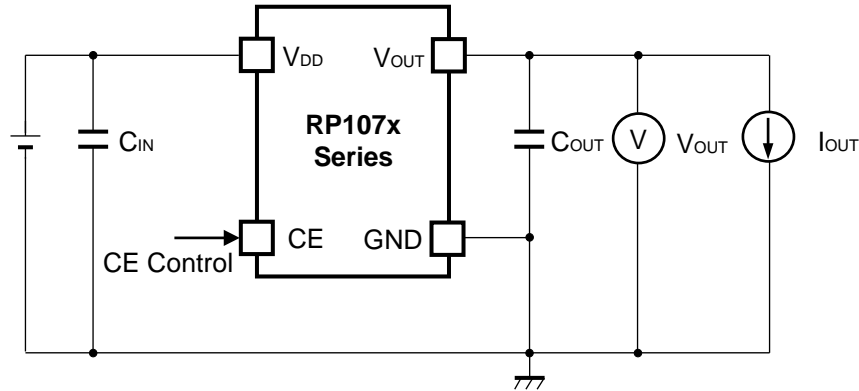

Basic Test Circuit

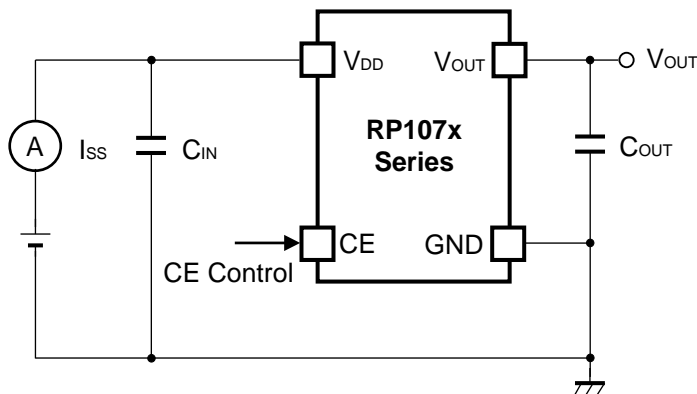

Test Circuit for Supply Current

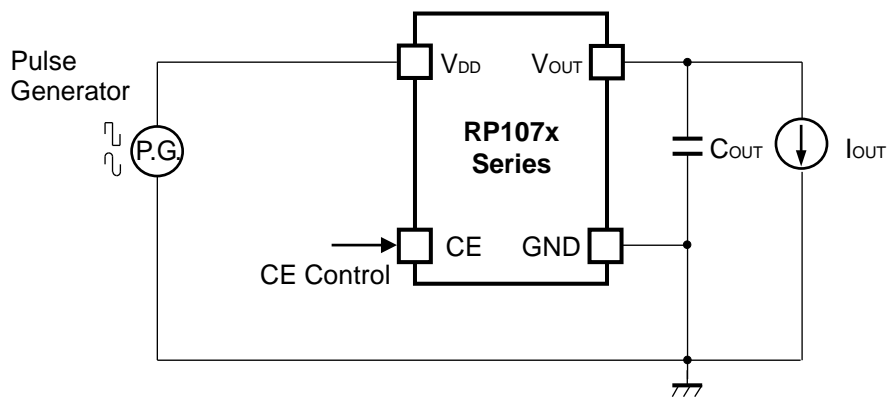

Test Circuit for Ripple Rejection


\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
\*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

---

## RP107x

NO.EA-181-240607





---

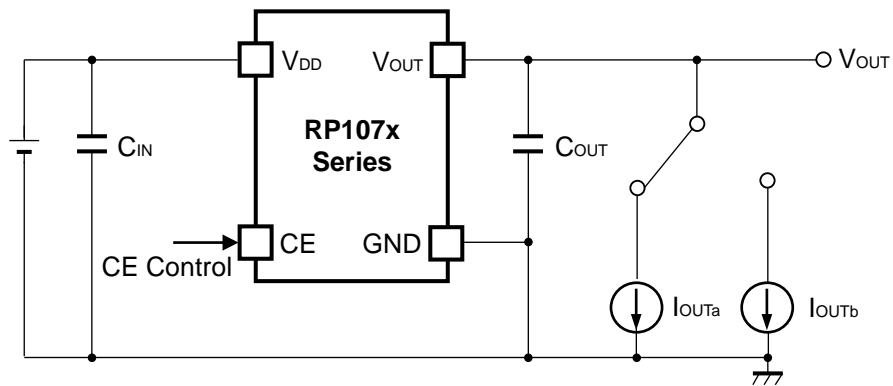



**Test Circuit for Load Transient Response**

## TYPICAL CHARACTERISTICS

### 1) Output Voltage vs. Output Current ( $C_{IN}=0.1\mu F$ , $T_{opt}=25^{\circ}C$ )

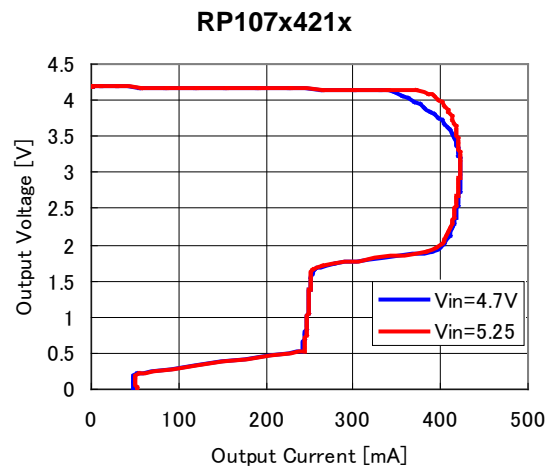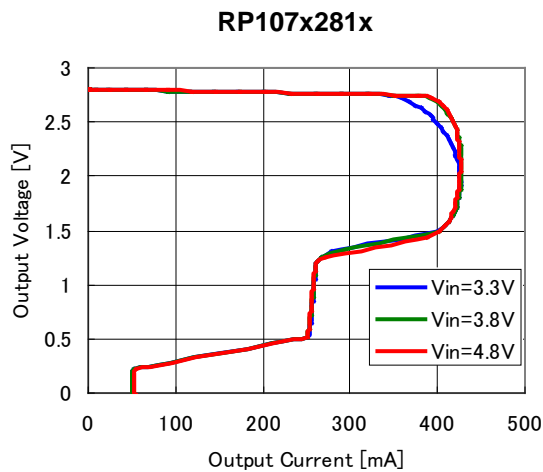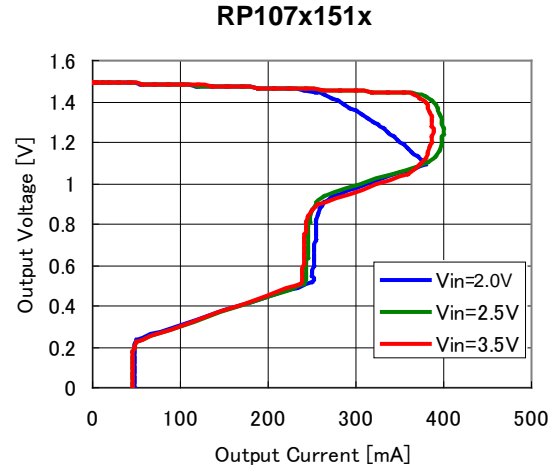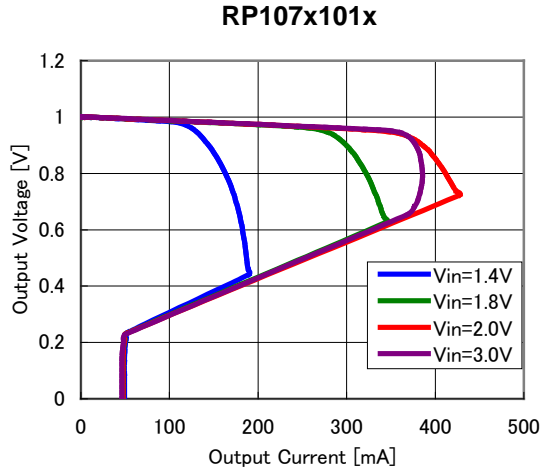

### 2) Output Voltage vs. Input Voltage ( $C_{IN}=0.1\mu F$ , $T_{opt}=25^{\circ}C$ )

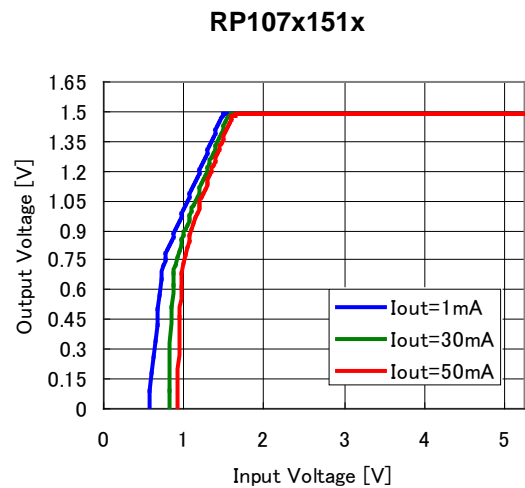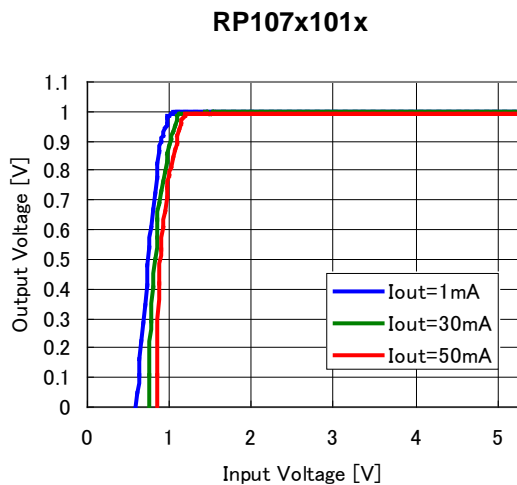


\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.


## RP107x

NO.EA-181-240607

RP107x281x

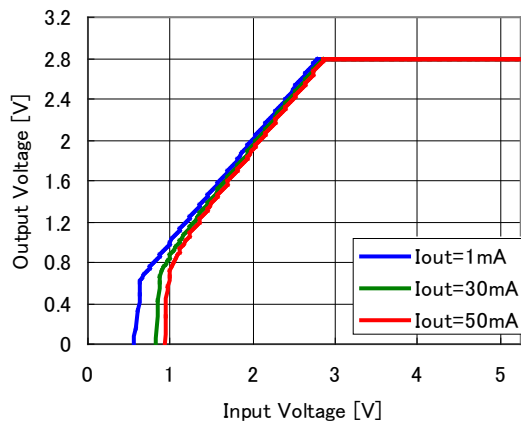


RP107x421x

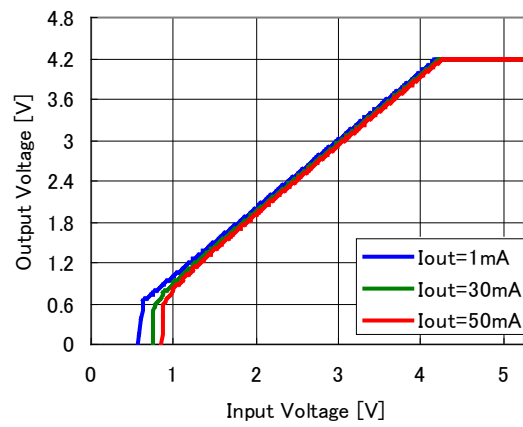


### 3) Supply Current vs. Input Voltage (C<sub>IN</sub>=0.1μF, T<sub>opt</sub>=25°C)


RP107x101x

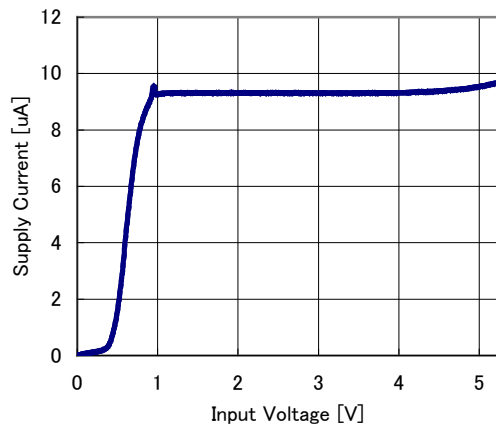


RP107x151x

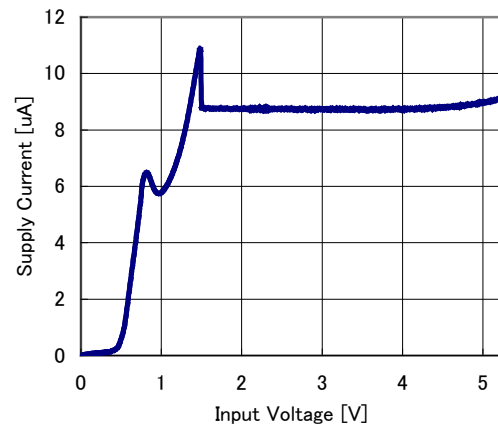





RP107x281x

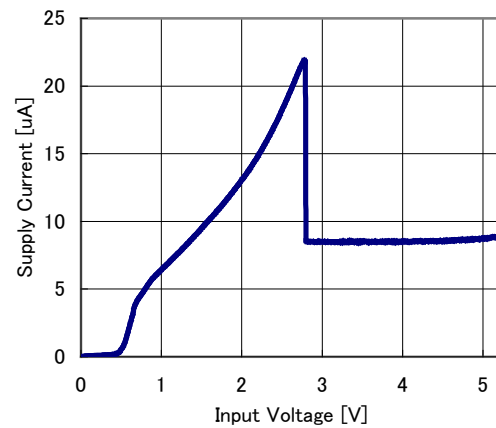



RP107x421x

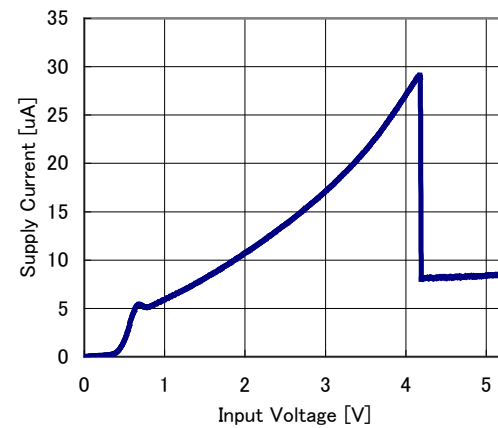

#### 4) Output Voltage vs. Temperature ( $C_{IN}=0.1\mu F$ , $I_{OUT}=1mA$ )

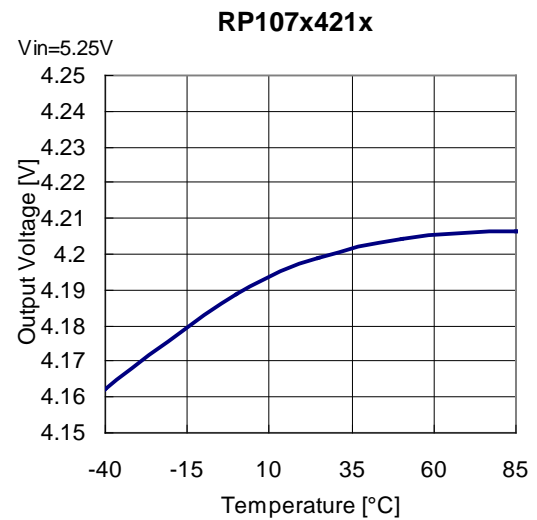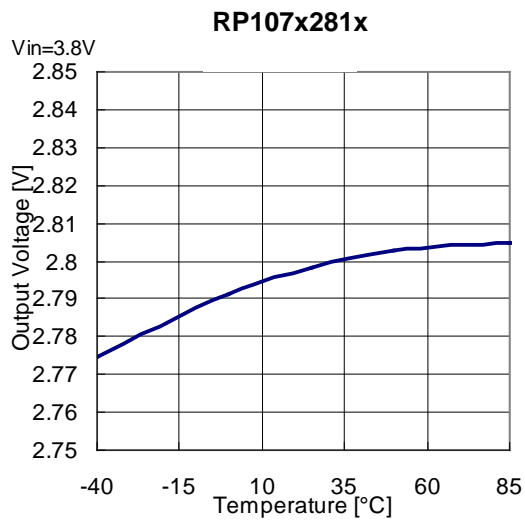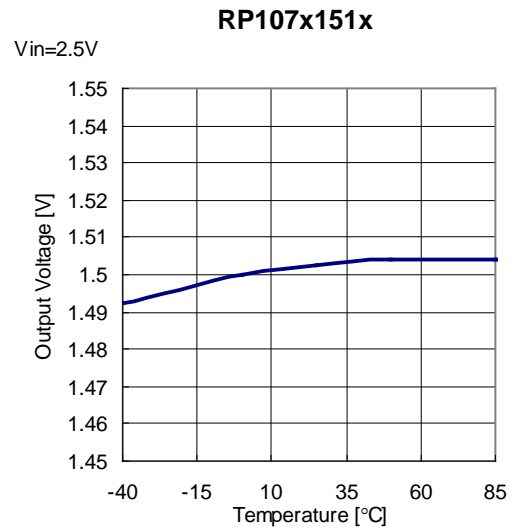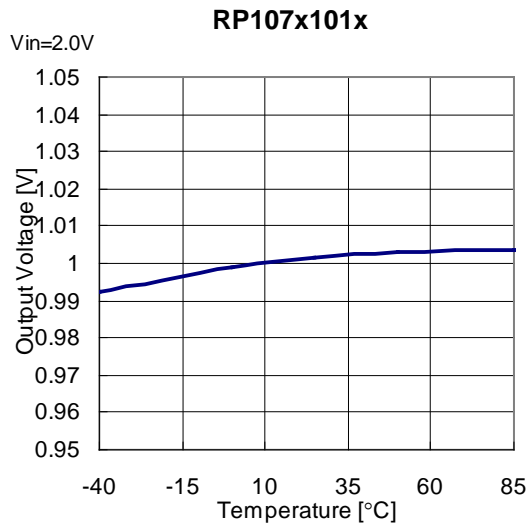

#### 5) Supply Current vs. Temperature ( $C_{IN}=0.1\mu F$ , $I_{OUT}=0mA$ )

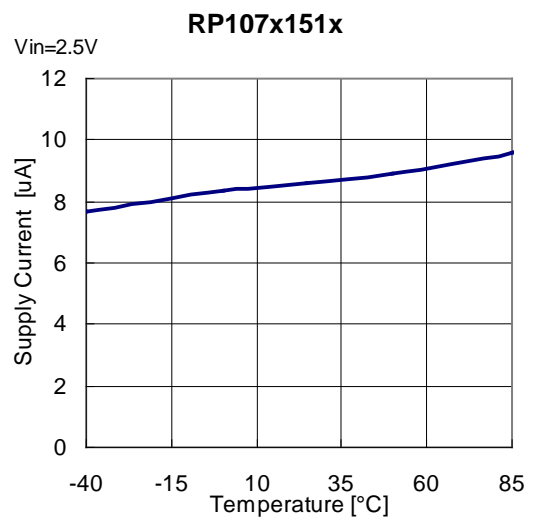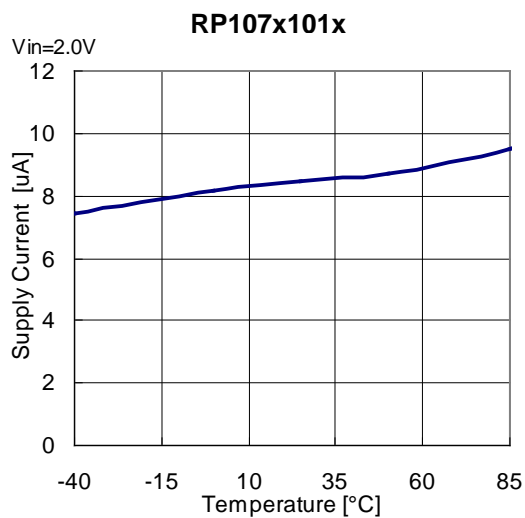


\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.


## RP107x

NO.EA-181-240607

**RP107x281x**

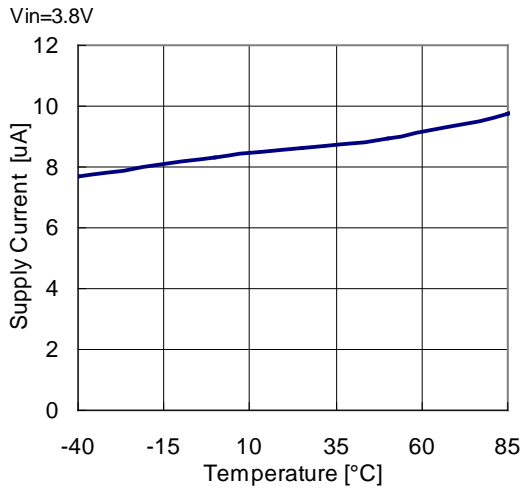


**RP107x421x**

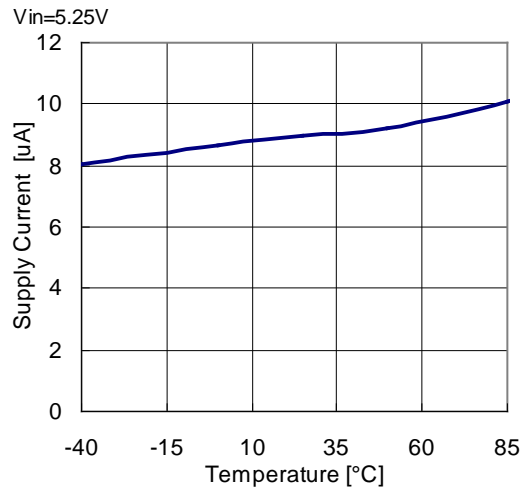


### 6) Dropout Voltage vs. Output Current ( $C_{IN}=0.1\mu F$ )


**RP107x101x**

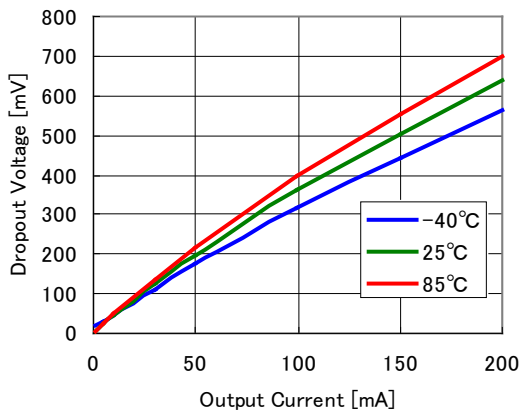


**RP107x111x**

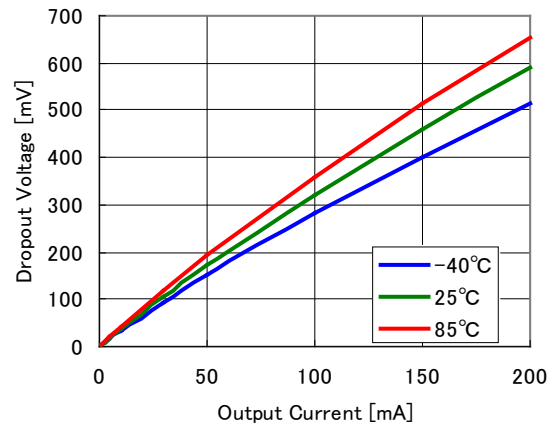

**RP107x121x**

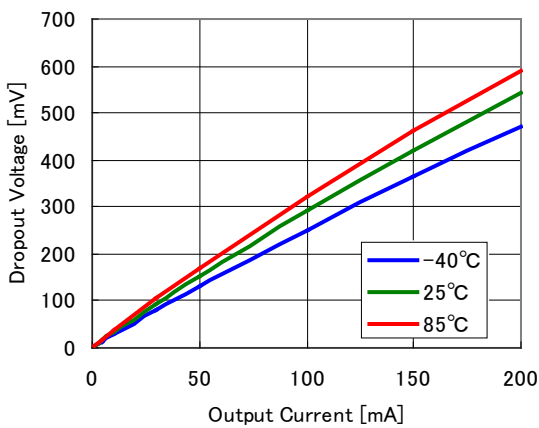

**RP107x151x**

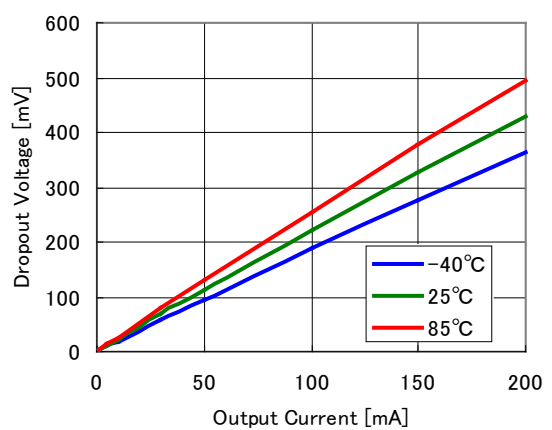


\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.


## RP107x

NO.EA-181-240607


**RP107x201x**

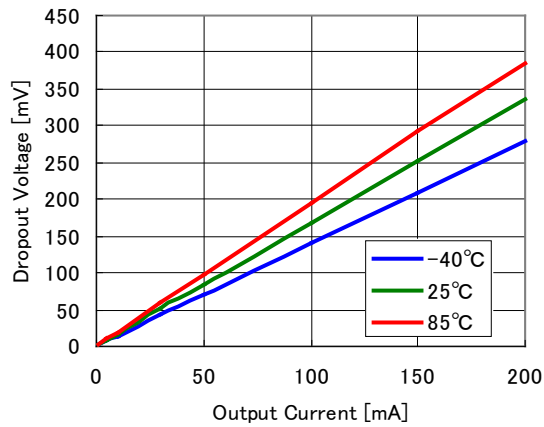

**RP107x301x**

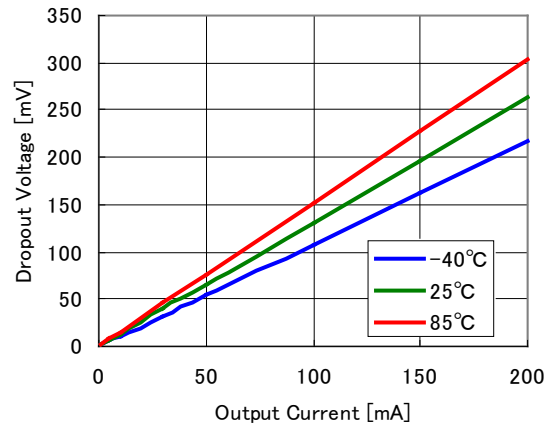


**RP107x421x**

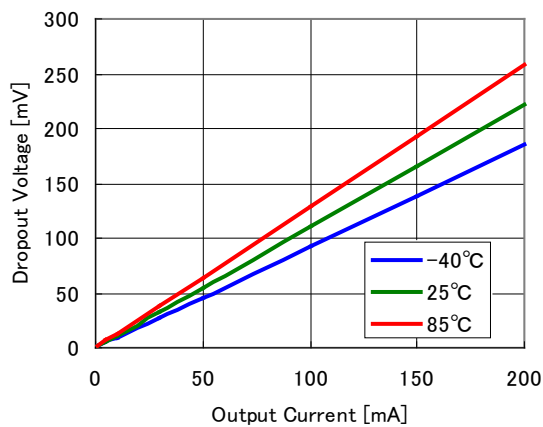

### 7) Dropout Voltage vs. Set Output Voltage ( $C_{IN}=0.1\mu F$ )


**RP107x**

$I_{out}=1mA$

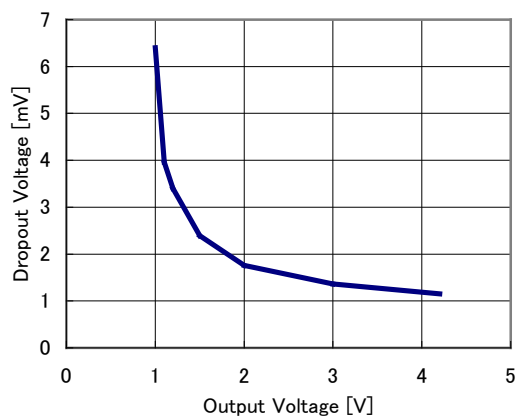

**RP107x**




$I_{out}=30mA$

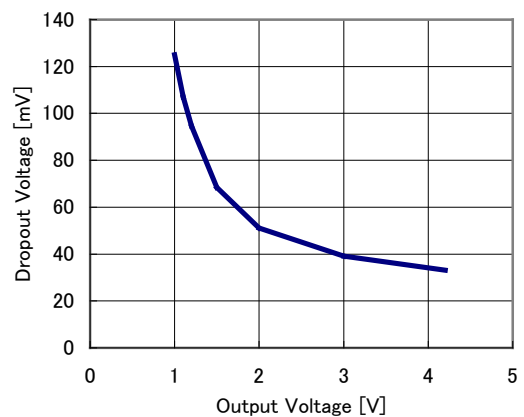


\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

## RP107x

NO.EA-181-240607

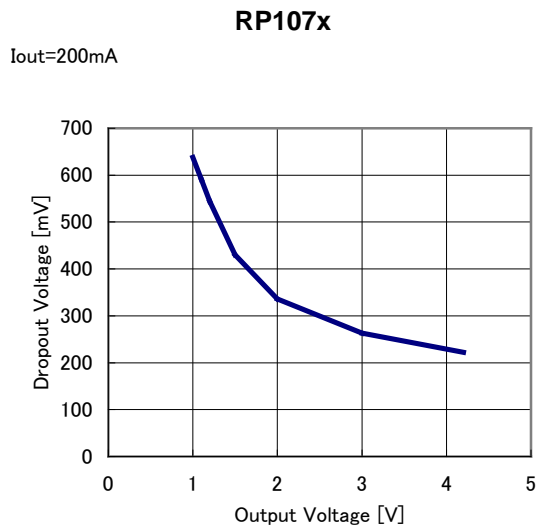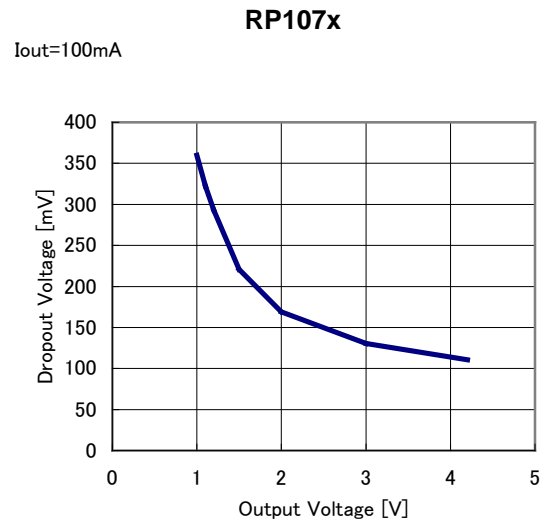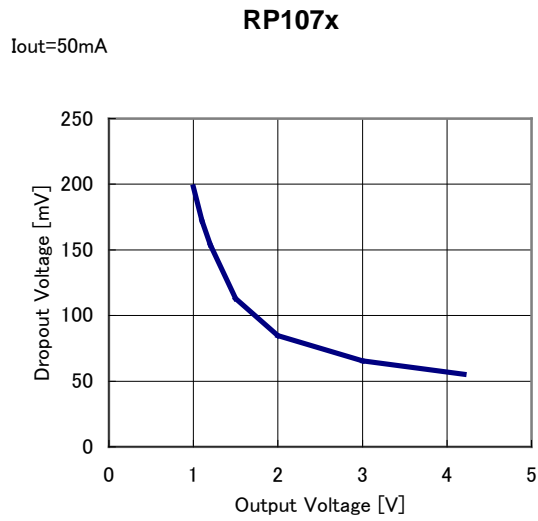

### 8) Minimum Operating Voltage ( $C_{IN}=0.1\mu\text{F}$ )

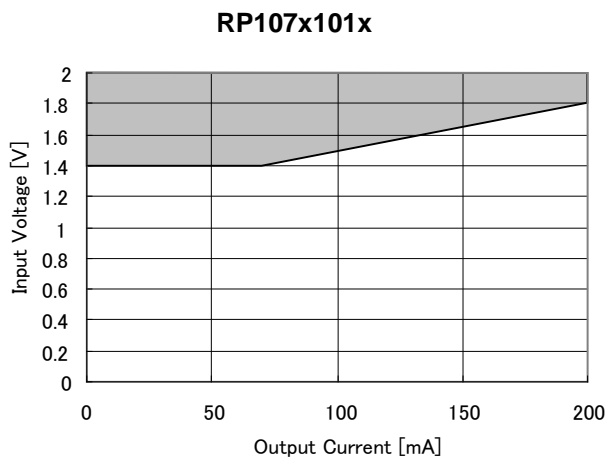







Hatched area is available  
for 1.0V output

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

**RP107x**

NO.EA-181-240607



## 9) Ripple Rejection vs. Frequency ( $C_{IN}$ =none, $T_{opt}$ =25°C)

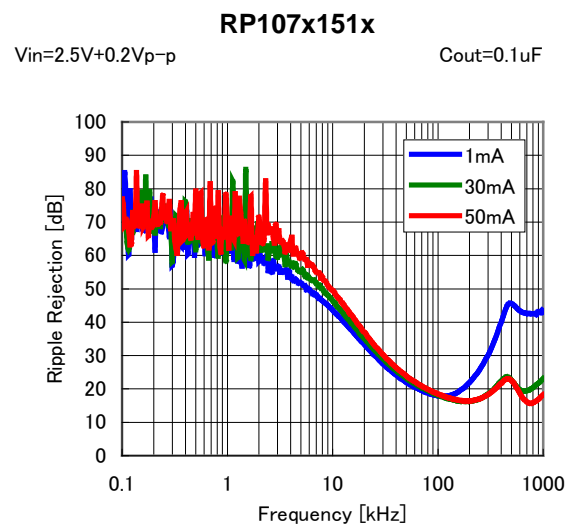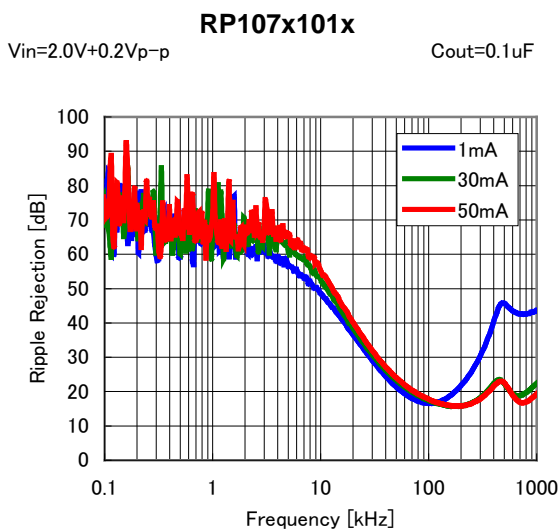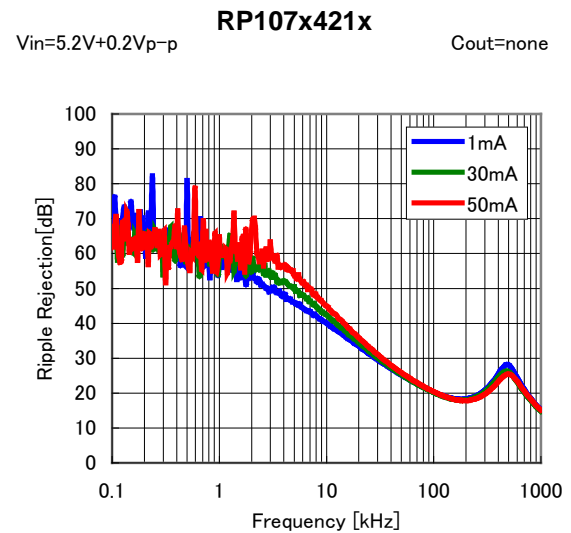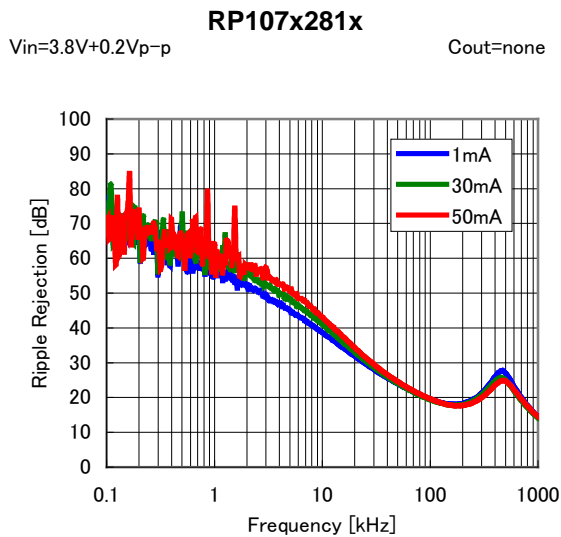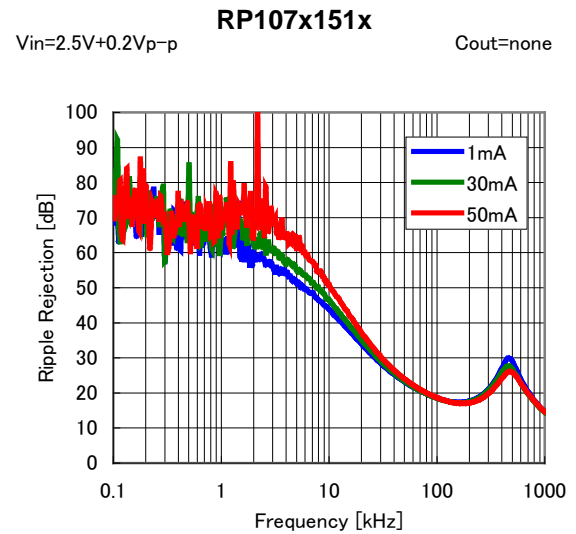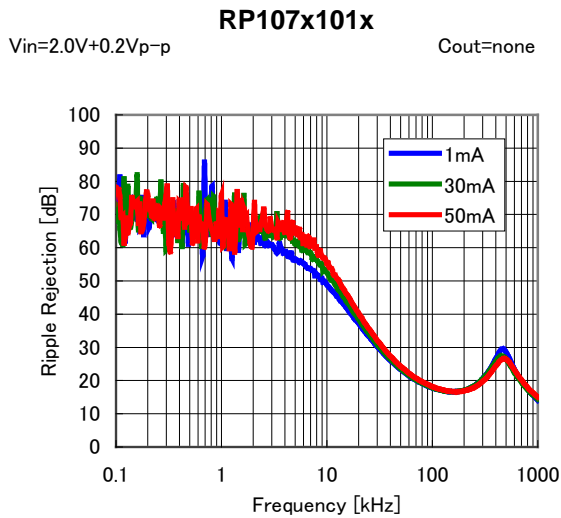




\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

## RP107x

NO.EA-181-240607

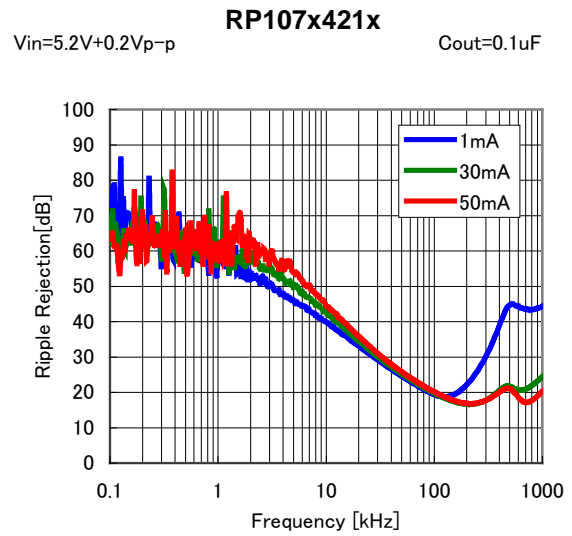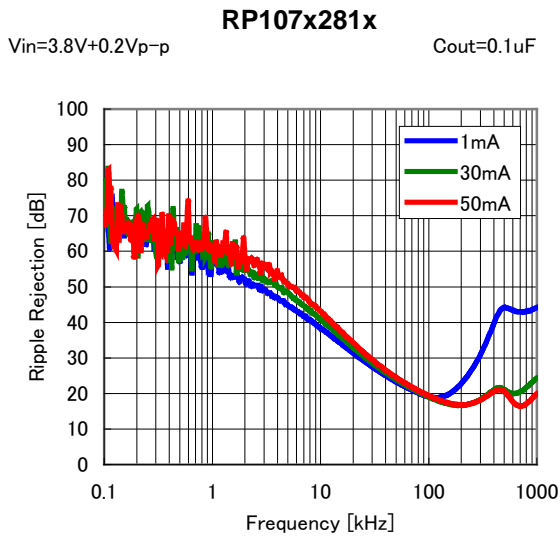

### 10) Ripple Rejection vs. Input Bias Voltage ( $C_{OUT}=0.1\mu F$ , Ripple=0.2Vp-p, $T_{opt}=25^{\circ}C$ )

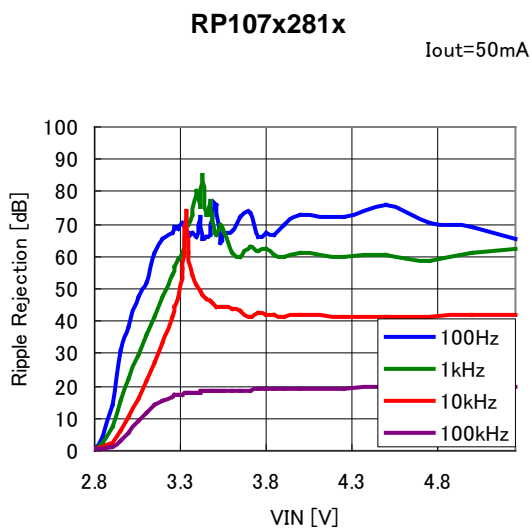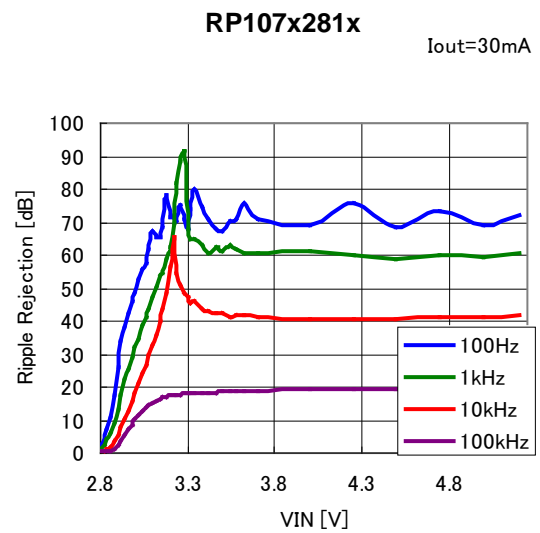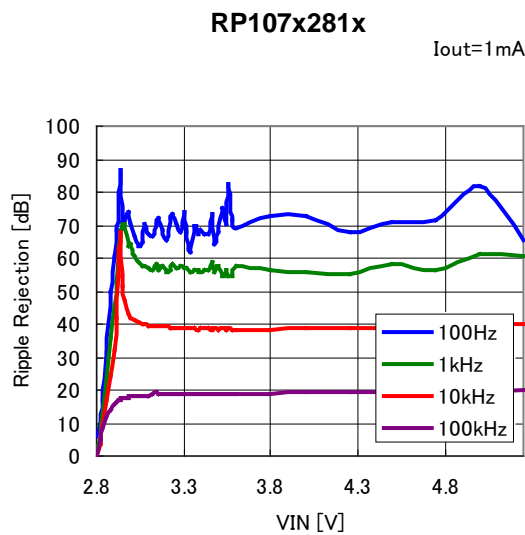

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

## RP107x


NO.EA-181-240607

### 11) Input Transient Response ( $C_{IN}=none$ , $I_{OUT}=30mA$ , $t_r=t_f=5\mu s$ , $T_{opt}=25^{\circ}C$ )

**RP107x101x**

Vin:2V $\leftrightarrow$ 3V


Cout=none

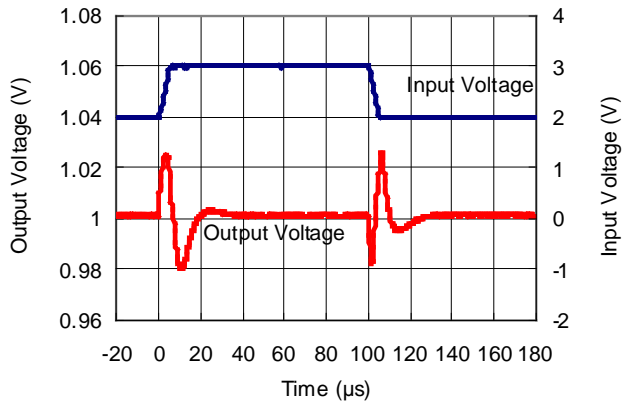

**RP107x101x**

Vin:2V $\leftrightarrow$ 3V


Cout=Ceramic 0.1μF

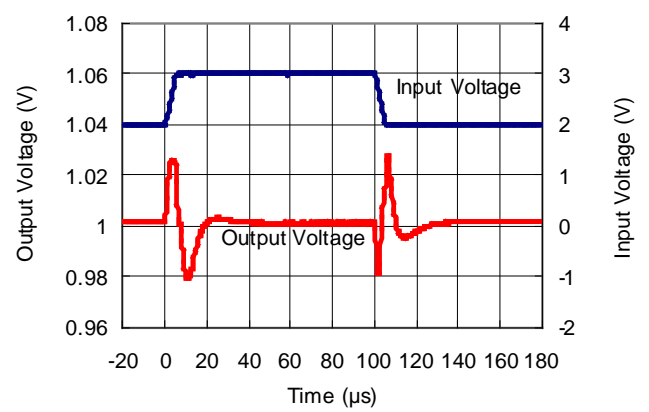

**RP107x151x**

Vin:2.5V $\leftrightarrow$ 3.5V


Cout=none

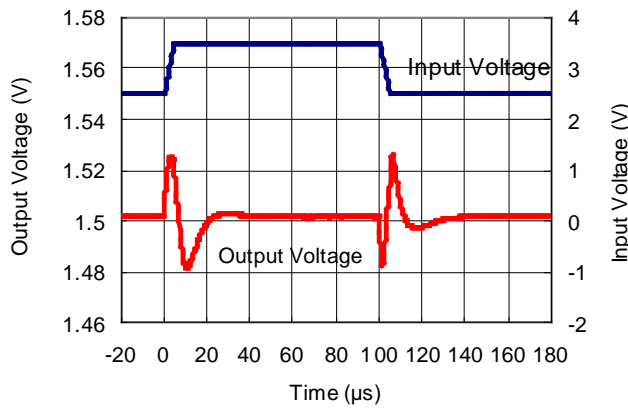

**RP107x151x**

Vin:2.5V $\leftrightarrow$ 3.5V


Cout=Ceramic 0.1μF

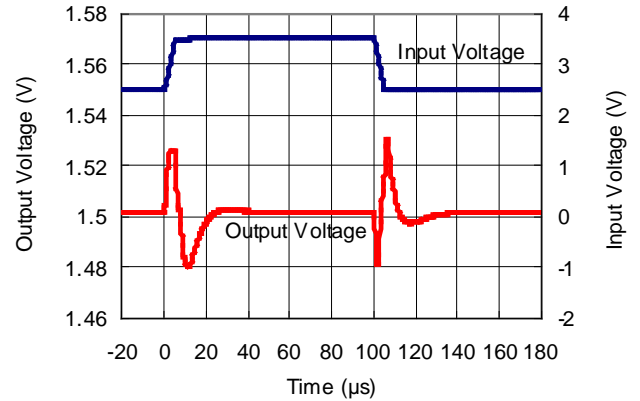

**RP107x281x**

Vin:3.8V $\leftrightarrow$ 4.8V


Cout=none

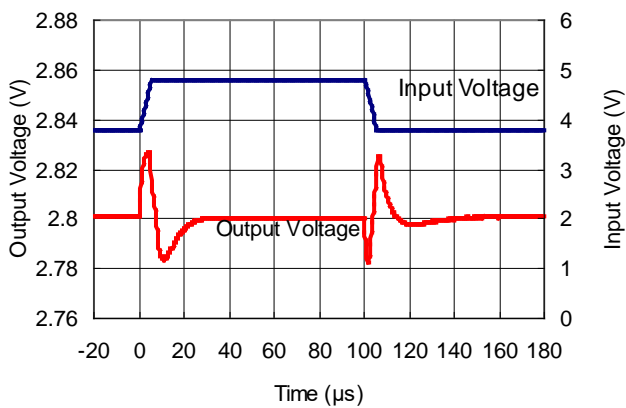

**RP107x281x**

Vin:3.8V $\leftrightarrow$ 4.8V

Cout=Ceramic 0.1μF

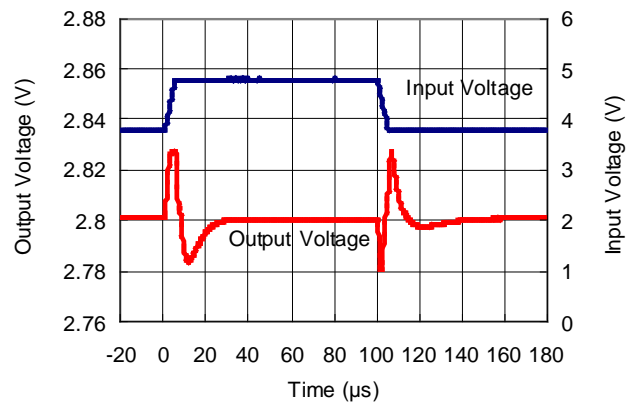

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

## RP107x

NO.EA-181-240607


### RP107x421x

Vin: 4.5V  $\leftrightarrow$  5.5V


Cout=None

Vin: 4.5V  $\leftrightarrow$  5.5V

Cout=Ceramic 0.1 $\mu$ F

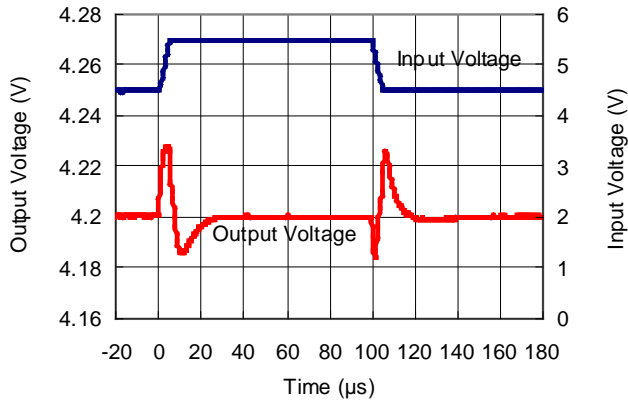


### RP107x421x

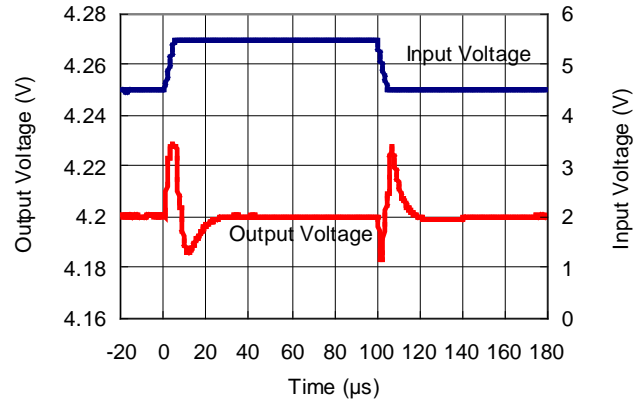

## 12) Load Transient Response (C<sub>IN</sub>=0.1 $\mu$ F, T<sub>opt</sub>=25°C)


### RP107x101x

Tr=Tf: 2 $\mu$ s  
Iout : 5mA  $\leftrightarrow$  50mA

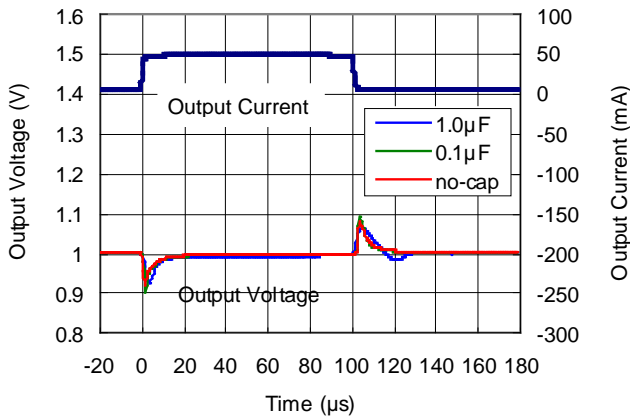


### RP107x101x

Tr=Tf: 0.5 $\mu$ s  
Iout : 50mA  $\leftrightarrow$  100mA

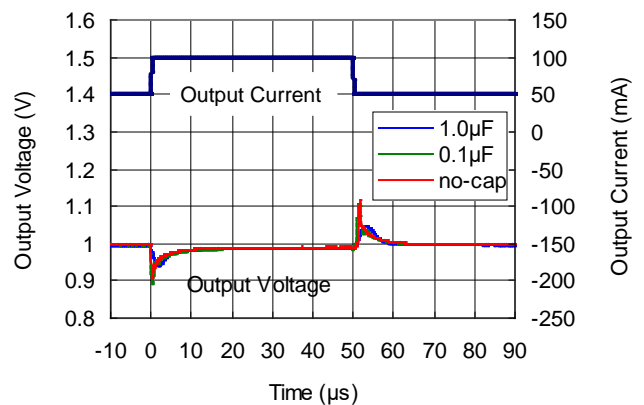


### RP107x151x

Tr=Tf: 2 $\mu$ s  
Iout : 5mA  $\leftrightarrow$  50mA

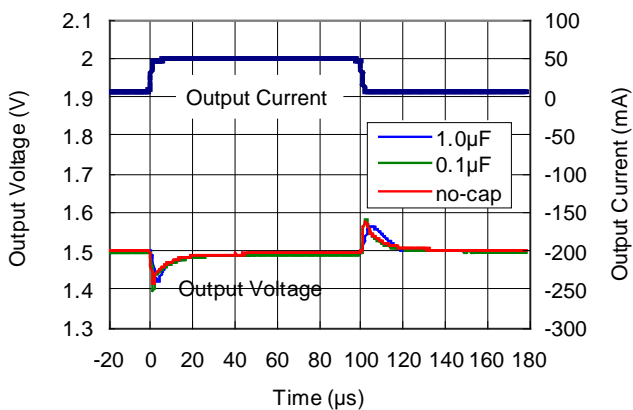

### RP107x151x

Tr=Tf: 0.5 $\mu$ s  
Iout : 50mA  $\leftrightarrow$  100mA

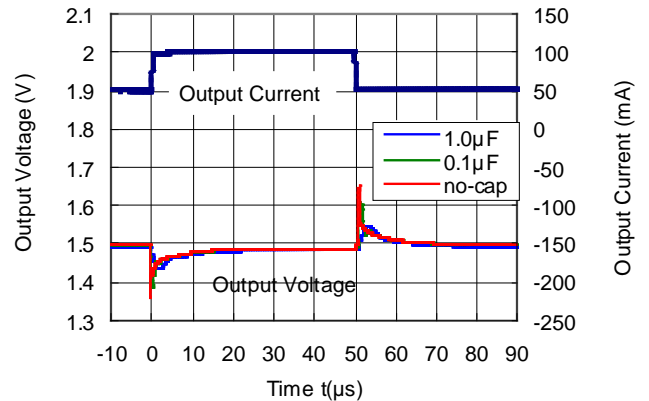


\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.


## RP107x

NO.EA-181-240607


RP107x281x

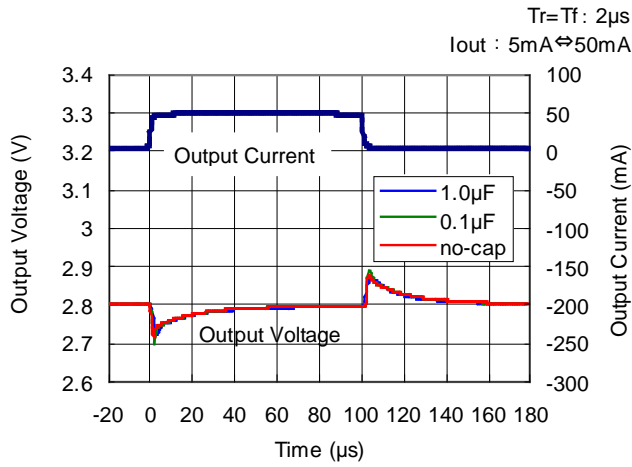


RP107x281x

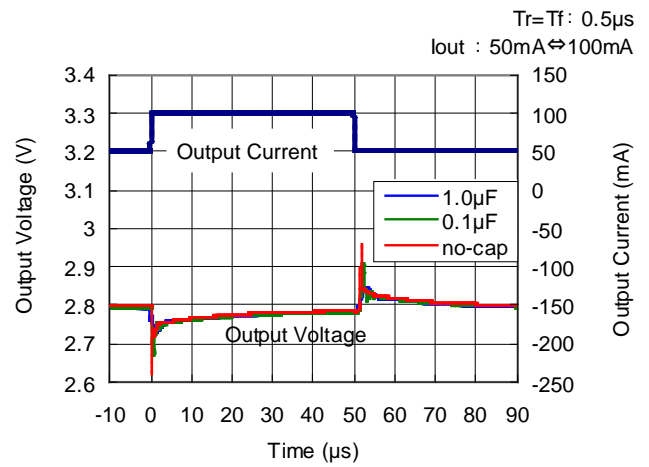

RP107x421x

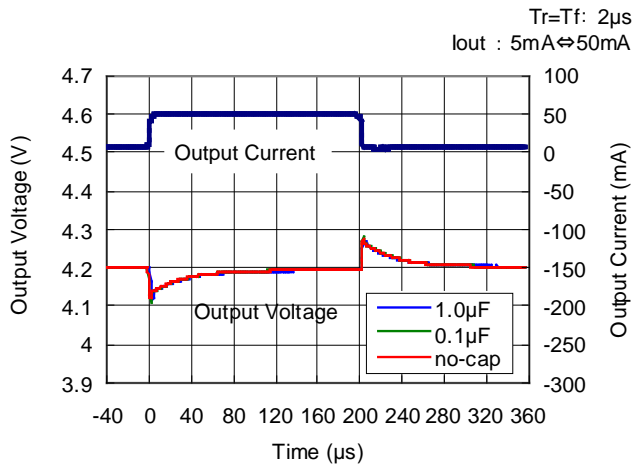

RP107x421x

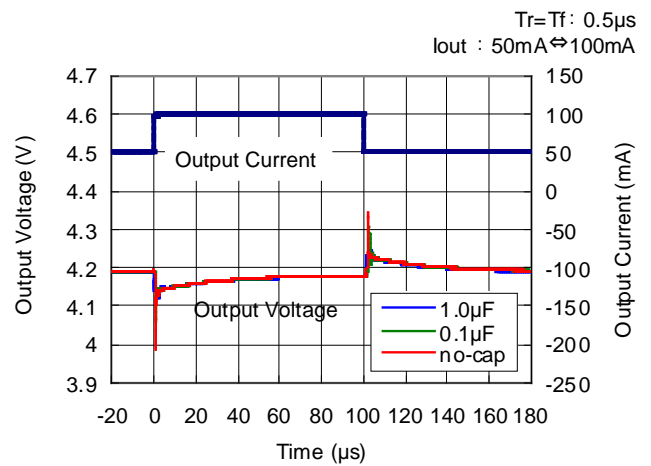


### 13) Turn On Speed with CE pin (C<sub>IN</sub>=0.1 $\mu$ F, T<sub>opt</sub>=25°C)

RP107x101x

V<sub>in</sub>=2.0V


C<sub>out</sub>=none

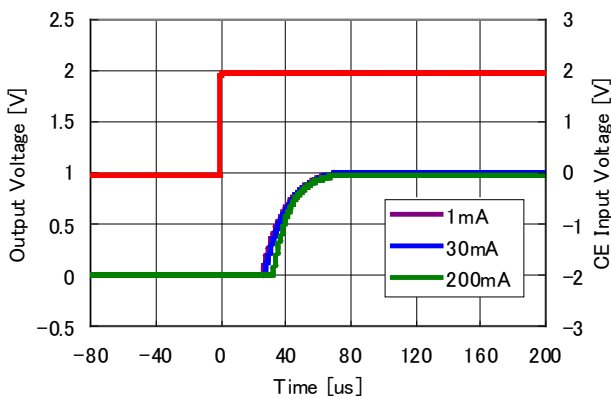

RP107x151x

V<sub>in</sub>=2.5V


C<sub>out</sub>=none

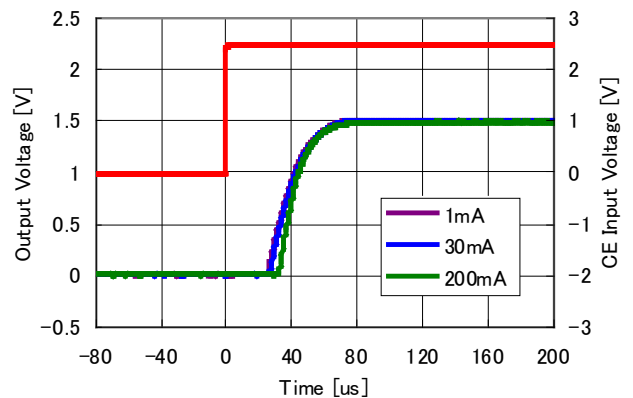

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

## RP107x

NO.EA-181-240607

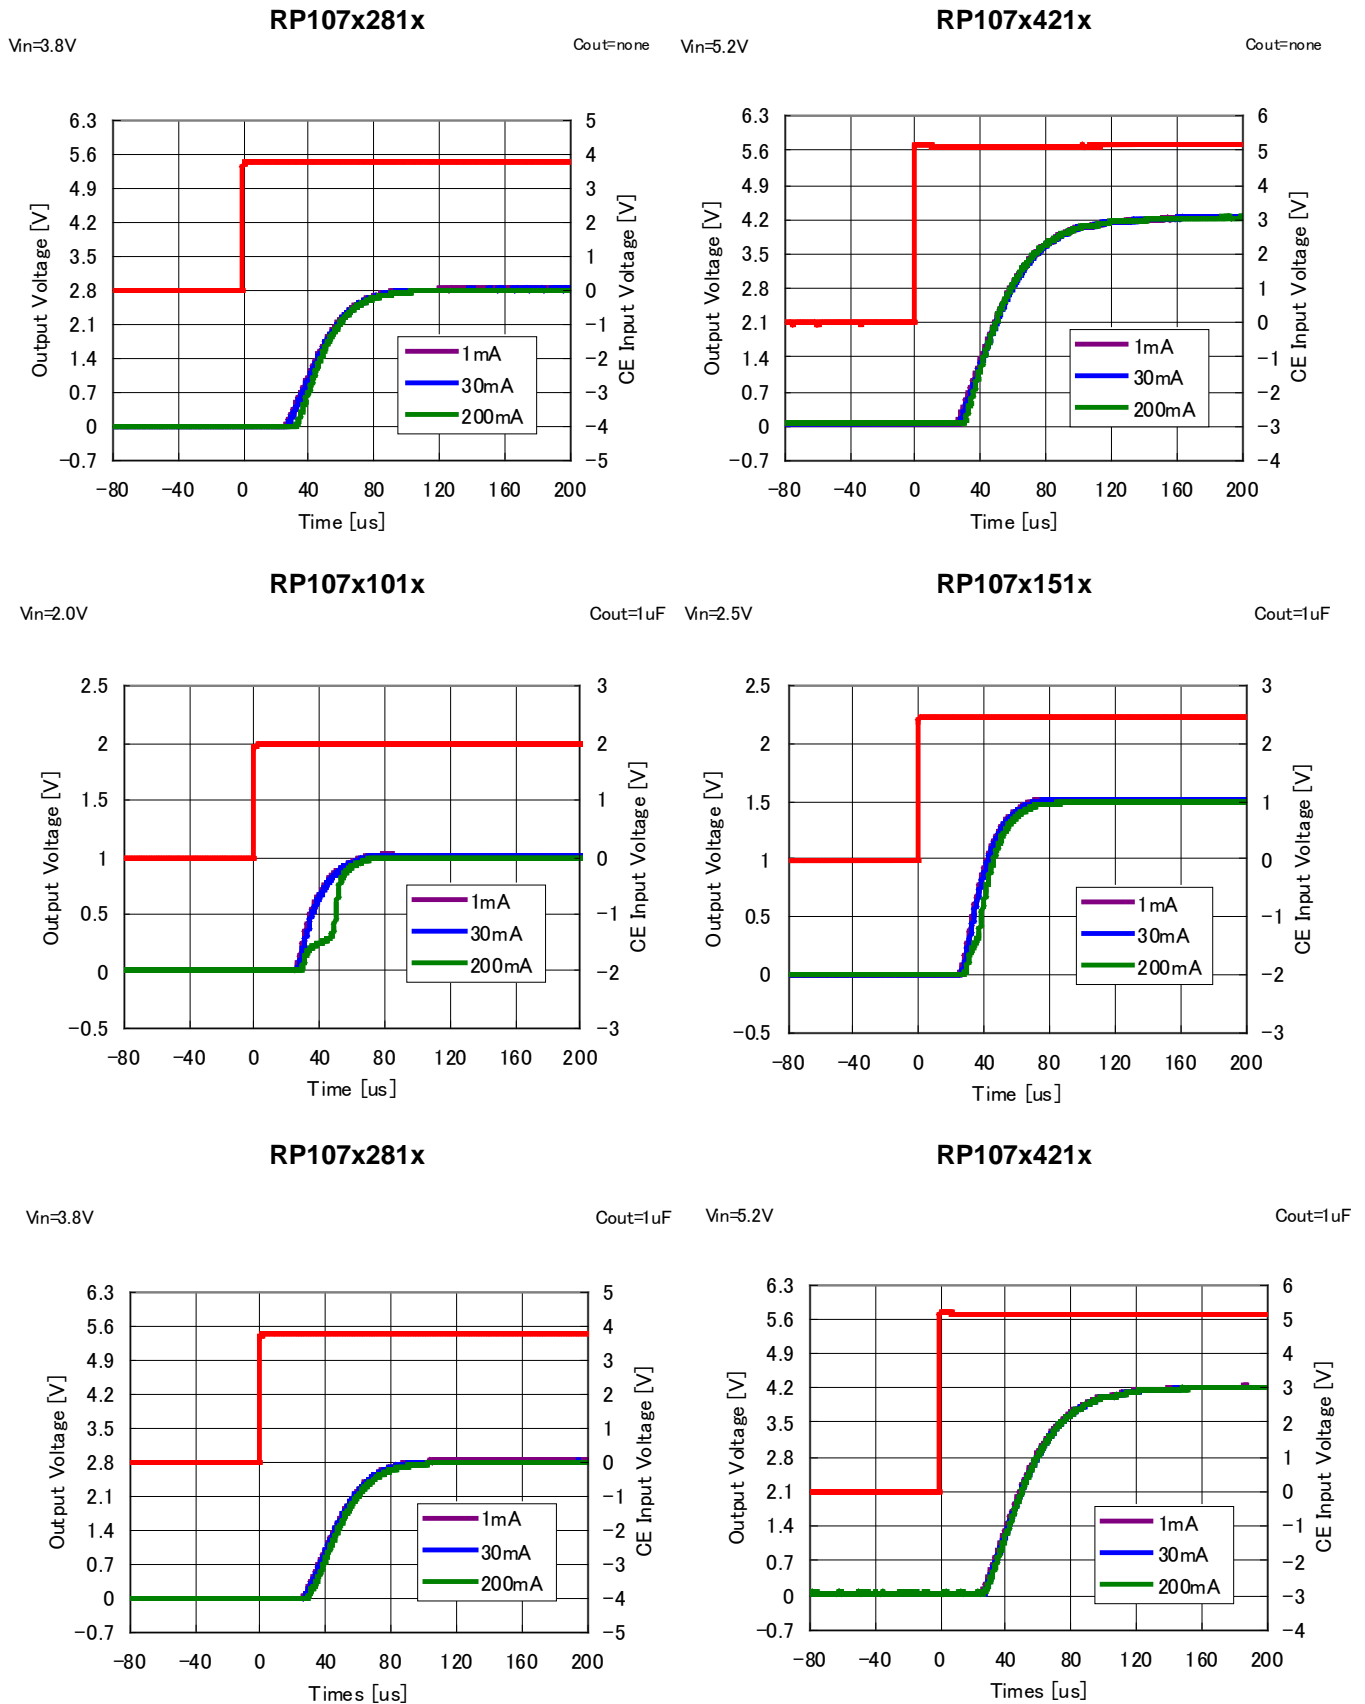


\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

## RP107x

NO.EA-181-240607

### 14) Turn Off Speed with CE pin (D Version) ( $C_{IN}=0.1\mu F$ , $T_{opt}=25^{\circ}C$ )

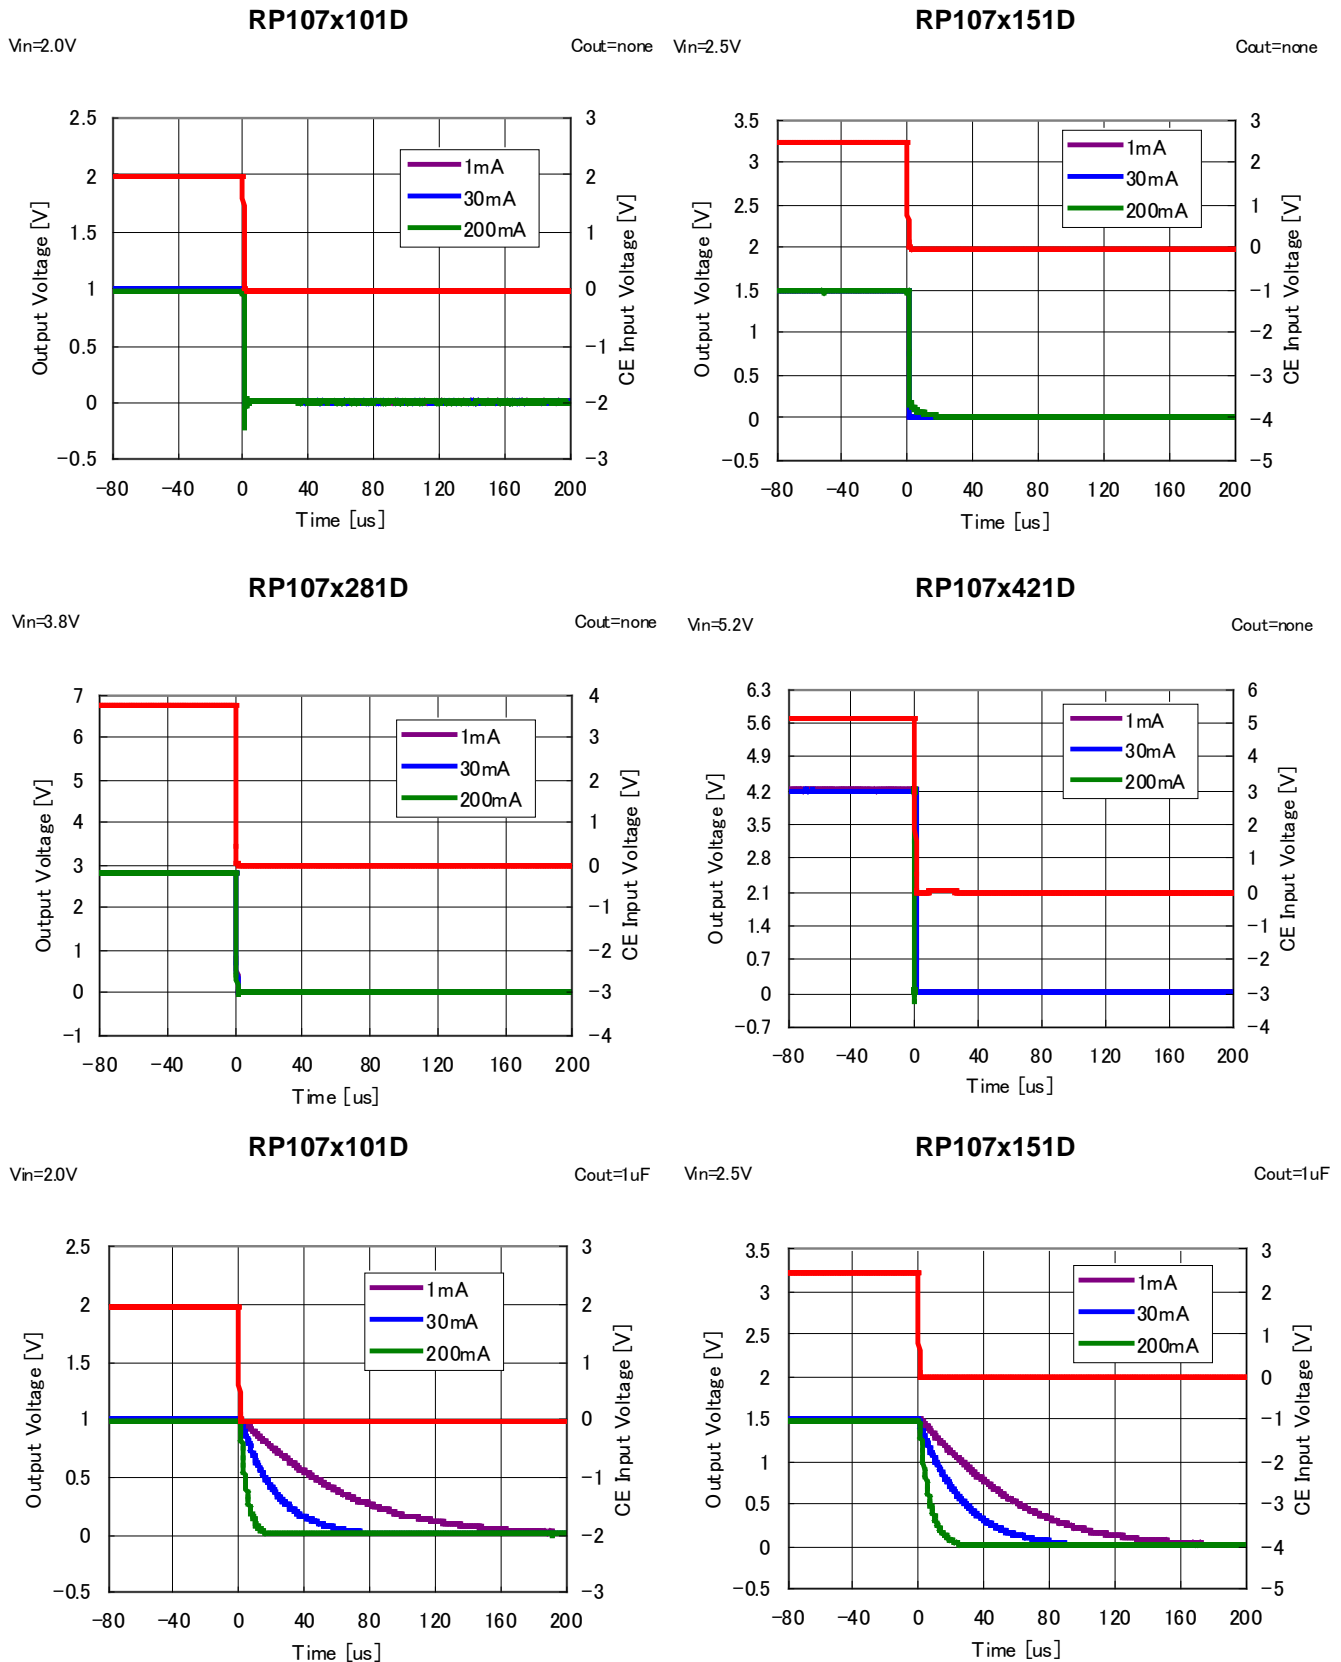

\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.

## RP107x

NO.EA-181-240607


RP107x281D

$V_{in}=3.8V$


$C_{out}=1\mu F$

$V_{in}=5.2V$

$C_{out}=1\mu F$

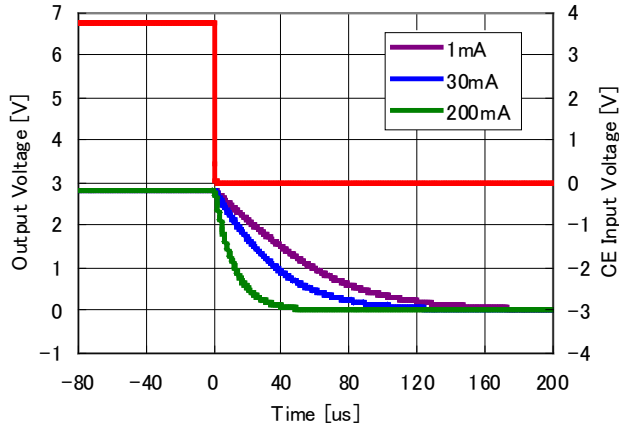


RP107x421D

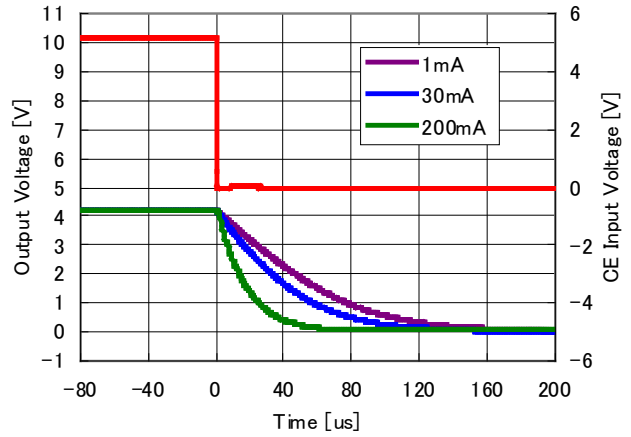

### 15) Inrush Current ( $C_{in}=0.1\mu F$ , $T_{opt}=25^{\circ}C$ )


RP107x101x

$V_{in}=2.0V$   
 $C_{out}=none$

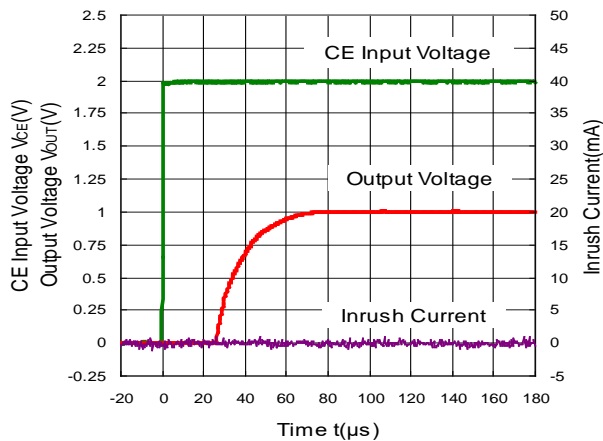


RP107x101x

$V_{in}=2.0V$   
 $C_{out}=Ceramic1.0\mu F$

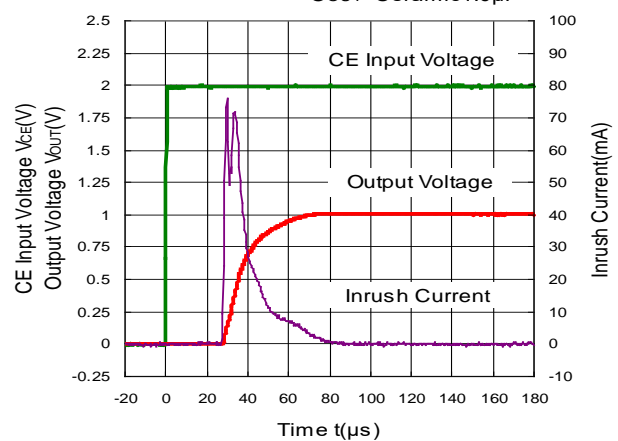


RP107x101x

$V_{in}=2.0V$   
 $C_{out}=Ceramic4.7\mu F$

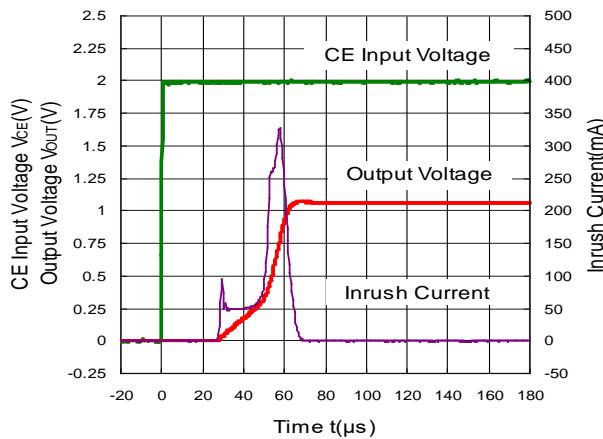

RP107x281x

$V_{in}=3.8V$   
 $C_{out}=none$

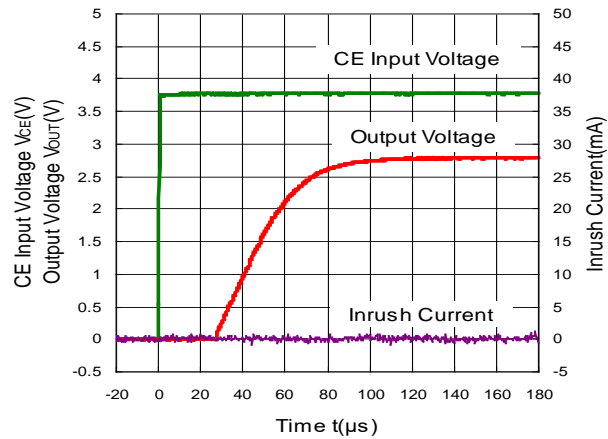


\*RP107N (SOT-23-5) is the discontinued product as of April 2017.  
 \*RP107Z (WLCSP-4-P5) is the discontinued product as of June 2024.


## RP107x

NO.EA-181-240607


**RP107x281x**

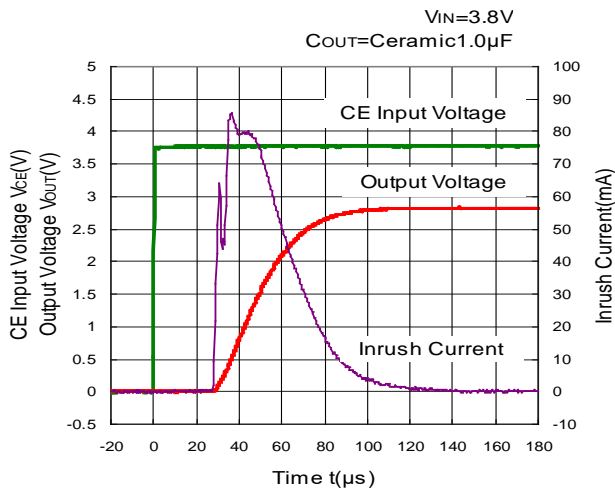


**RP107x281x**

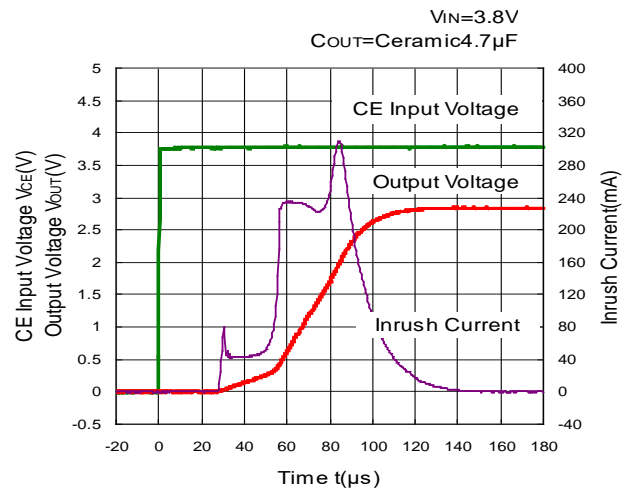


**RP107x421x**

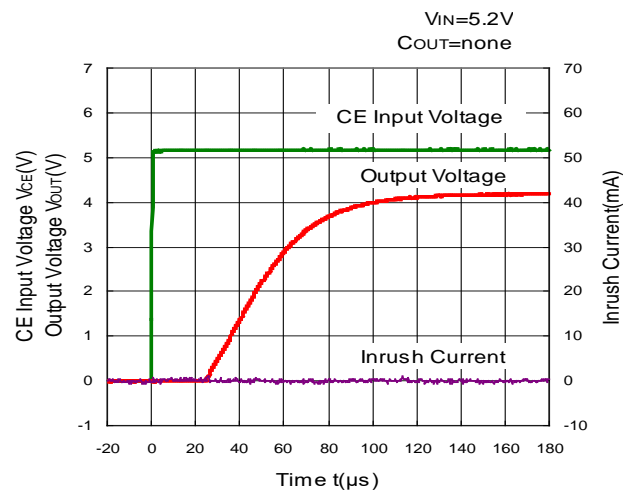

**RP107x421x**

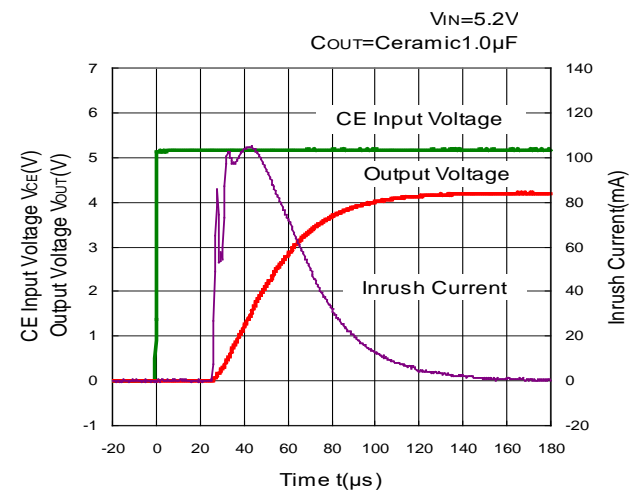

**RP107x421x**

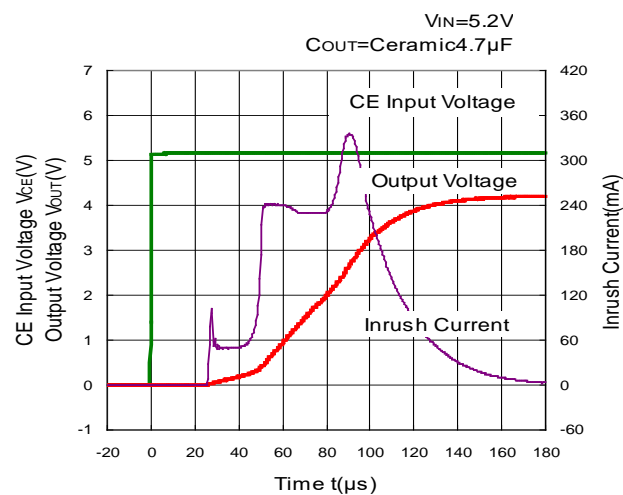

## RP107x

NO.EA-181-240607

## ESR vs. Output Current

When using these ICs, consider the following points:

The relations between  $I_{OUT}$  (Output Current) and ESR of an output capacitor are shown below.

The conditions when the white noise level is under  $40\mu V$  (Avg.) are marked as the hatched area in the graph.

### Measurement conditions


Frequency Band : 10Hz to 2MHz

Temperature :  $-40^{\circ}C$  to  $85^{\circ}C$

$C_{IN}$ ,  $C_{OUT}$  : Ceramic  $0.1\mu F$


**RP107x101x**

$V_{in}=1.0V\sim 5.25V$

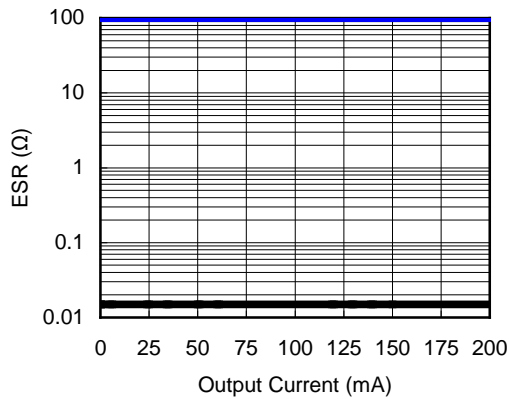


**RP107x281x**

$V_{in}=1.0V\sim 5.25V$

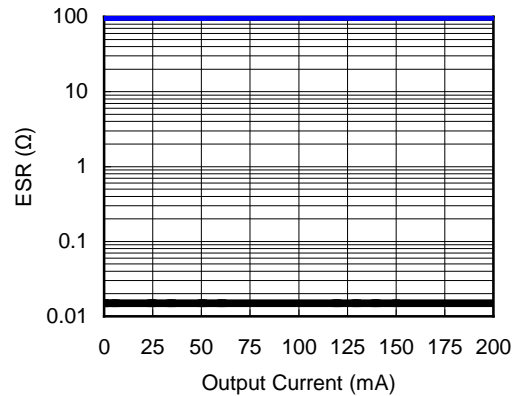

**RP107x421x**

$V_{in}=1.0V\sim 5.25V$

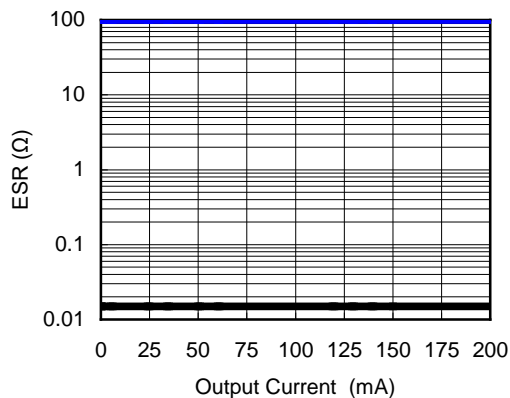

1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to our sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without the prior written consent of us.
3. This product and any technical information relating thereto are subject to complementary export controls (so-called KNOW controls) under the Foreign Exchange and Foreign Trade Law, and related politics ministerial ordinance of the law. (Note that the complementary export controls are inapplicable to any application-specific products, except rockets and pilotless aircraft, that are insusceptible to design or program changes.) Accordingly, when exporting or carrying abroad this product, follow the Foreign Exchange and Foreign Trade Control Law and its related regulations with respect to the complementary export controls.
4. The technical information described in this document shows typical characteristics and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under our or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death should first contact us.
  - Aerospace Equipment
  - Equipment Used in the Deep Sea
  - Power Generator Control Equipment (nuclear, steam, hydraulic, etc.)
  - Life Maintenance Medical Equipment
  - Fire Alarms / Intruder Detectors
  - Vehicle Control Equipment (automotive, airplane, railroad, ship, etc.)
  - Various Safety Devices
  - Traffic control system
  - Combustion equipment

In case your company desires to use this product for any applications other than general electronic equipment mentioned above, make sure to contact our company in advance. Note that the important requirements mentioned in this section are not applicable to cases where operation requirements such as application conditions are confirmed by our company in writing after consultation with your company.

6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. The products have been designed and tested to function within controlled environmental conditions. Do not use products under conditions that deviate from methods or applications specified in this datasheet. Failure to employ the products in the proper applications can lead to deterioration, destruction or failure of the products. We shall not be responsible for any bodily injury, fires or accident, property damage or any consequential damages resulting from misuse or misapplication of the products.
8. **Quality Warranty**
  - 8-1. **Quality Warranty Period**  
In the case of a product purchased through an authorized distributor or directly from us, the warranty period for this product shall be one (1) year after delivery to your company. For defective products that occurred during this period, we will take the quality warranty measures described in section 8-2. However, if there is an agreement on the warranty period in the basic transaction agreement, quality assurance agreement, delivery specifications, etc., it shall be followed.
  - 8-2. **Quality Warranty Remedies**  
When it has been proved defective due to manufacturing factors as a result of defect analysis by us, we will either deliver a substitute for the defective product or refund the purchase price of the defective product.  
Note that such delivery or refund is sole and exclusive remedies to your company for the defective product.
  - 8-3. **Remedies after Quality Warranty Period**  
With respect to any defect of this product found after the quality warranty period, the defect will be analyzed by us. On the basis of the defect analysis results, the scope and amounts of damage shall be determined by mutual agreement of both parties. Then we will deal with upper limit in Section 8-2. This provision is not intended to limit any legal rights of your company.
9. Anti-radiation design is not implemented in the products described in this document.
10. The X-ray exposure can influence functions and characteristics of the products. Confirm the product functions and characteristics in the evaluation stage.
11. WLCSP products should be used in light shielded environments. The light exposure can influence functions and characteristics of the products under operation or storage.
12. Warning for handling Gallium and Arsenic (GaAs) products (Applying to GaAs MMIC, Photo Reflector). These products use Gallium (Ga) and Arsenic (As) which are specified as poisonous chemicals by law. For the prevention of a hazard, do not burn, destroy, or process chemically to make them as gas or power. When the product is disposed of, please follow the related regulation and do not mix this with general industrial waste or household waste.
13. Please contact our sales representatives should you have any questions or comments concerning the products or the technical information.



**Nisshinbo Micro Devices Inc.**

**Official website**

<https://www.nisshinbo-microdevices.co.jp/en/>

**Purchase information**

<https://www.nisshinbo-microdevices.co.jp/en/buy/>