3RT2017-4KB42-0LA0

## **Data sheet**



traction contactor, AC-3e/AC-3, 12 A, 5.5 kW / 400 V, 3-pole, 24 V DC, 0.7-1.25  $^{\star}$  Uc, with integrated suppressor diode, auxiliary contacts: 1 NC, ring cable lug connection, frame size: S00, with plugged on series resistor

product brand name	SIRIUS
product designation	Power contactor
design of the product	With extended operating range
product type designation	3RT2
General technical data	
size of contactor	S00
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	3.6 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	1.2 W
<ul> <li>without load current share typical</li> </ul>	4 W
type of calculation of power loss depending on pole	quadratic
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V
surge voltage resistance	
of main circuit rated value	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at DC	7.3g / 5 ms, 4.7g / 10 ms
shock resistance with sine pulse	
• at DC	11,4g / 5 ms, 7,3g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	30 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Lead - 7439-92-1
Weight	0.305 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-40 +70 °C
during storage	-55 +80 °C
relative humidity minimum	10 %

relative humidity at 55 °C according to IEC 60068-2-30	95 %
maximum Environmental footprint	
	Voc
Environmental Product Declaration(EPD)	Yes
global warming potential [CO2 eq] total	153 kg
global warming potential [CO2 eq] during manufacturing	1.42 kg
global warming potential [CO2 eq] during operation	152 kg
global warming potential [CO2 eq] after end of life	-0.305 kg
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
at AC-3e rated value maximum	690 V
operational current	
<ul> <li>at AC-1 at 400 V at ambient temperature 40 °C rated</li> </ul>	22 A
value	
• at AC-1	
<ul> <li>up to 690 V at ambient temperature 40 °C rated value</li> </ul>	22 A
— up to 690 V at ambient temperature 60 $^{\circ}\text{C}$ rated value	20 A
• at AC-2 at 400 V rated value	12 A
• at AC-3	
— at 400 V rated value	12 A
— at 500 V rated value	9.2 A
— at 690 V rated value	6.7 A
• at AC-3e	
— at 400 V rated value	12 A
— at 500 V rated value	9.2 A
— at 690 V rated value	6.7 A
• at AC-4 at 400 V rated value	8.5 A
minimum cross-section in main circuit	
at maximum AC-1 rated value	4 mm²
operational current for approx. 200000 operating cycles at AC-4	
at 400 V rated value	4.1 A
at 690 V rated value	3.3 A
operational current	
at 1 current path at DC-1	
— at 24 V rated value	20 A
— at 110 V rated value	2.1 A
— at 220 V rated value	0.8 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
with 2 current paths in series at DC-1	0.071
— at 24 V rated value	20 A
— at 110 V rated value	12 A
	1.6 A
— at 220 V rated value	
— at 440 V rated value	0.8 A
— at 600 V rated value	0.7 A
with 3 current paths in series at DC-1  at 24 V reted value.	20. A
— at 24 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	20 A
— at 440 V rated value	1.3 A
— at 600 V rated value	1 A
at 1 current path at DC-3 at DC-5	
— at 24 V rated value	20 A
— at 110 V rated value	0.1 A
<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	20 A

— at 110 V rated value	0.35 A
<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	1.5 A
— at 440 V rated value	0.2 A
— at 600 V rated value	0.2 A
operating power	
<ul> <li>at AC-2 at 400 V rated value</li> </ul>	5.5 kW
• at AC-3	
— at 230 V rated value	3 kW
— at 400 V rated value	5.5 kW
— at 500 V rated value	5.5 kW
— at 690 V rated value	5.5 kW
• at AC-3e	
— at 230 V rated value	3 kW
— at 400 V rated value	5.5 kW
— at 500 V rated value	5.5 kW
— at 690 V rated value	5.5 kW
operating power for approx. 200000 operating cycles at AC-	
4	
• at 400 V rated value	2 kW
at 690 V rated value	2.5 kW
short-time withstand current in cold operating state up to	
40 °C	000 A II
Iimited to 1 s switching at zero current maximum	200 A; Use minimum cross-section acc. to AC-1 rated value
Iimited to 5 s switching at zero current maximum	123 A; Use minimum cross-section acc. to AC-1 rated value
Iimited to 10 s switching at zero current maximum	96 A; Use minimum cross-section acc. to AC-1 rated value
Iimited to 30 s switching at zero current maximum	74 A; Use minimum cross-section acc. to AC-1 rated value
Iimited to 60 s switching at zero current maximum	61 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at DC	1 500 1/h
operating frequency	
• at AC-2 at AC-3e maximum	750 1/h
• at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage	DC
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	24 V
operating range factor control supply voltage rated value of magnet coil at DC	
initial value	0.7
Initial value     full-scale value	1.25
	suppressor diode
design of the surge suppressor	13 W
closing power of magnet coil at DC	4 W
holding power of magnet coil at DC	7 VV
closing delay	25 130 ms
• at DC	20 100 1118
opening delay	7 20 ms
• at DC	7 20 ms 10 15 ms
arcing time	10 15 ms E1 - A2
control version of the switch operating mechanism	E1-AZ
Auxiliary circuit	1
number of NC contacts for auxiliary contacts	1
• instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	40.4
• at 230 V rated value	10 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A
<ul> <li>at 690 V rated value</li> </ul>	1 A

operational current at DC-12	
• at 24 V rated value	10 A
at 48 V rated value	6 A
• at 60 V rated value	6 A
<ul> <li>at 110 V rated value</li> </ul>	3 A
• at 125 V rated value	2 A
<ul> <li>at 220 V rated value</li> </ul>	1 A
at 600 V rated value	0.15 A
operational current at DC-13	
at 24 V rated value	10 A
at 48 V rated value	2 A
• at 60 V rated value	2 A
• at 110 V rated value	1 A
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
• at 600 V rated value	0.1 A
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	11 A
at 600 V rated value	11 A
yielded mechanical performance [hp]	
• for single-phase AC motor	
— at 110/120 V rated value	0.5 hp
— at 230 V rated value	2 hp
• for 3-phase AC motor	Z IIP
— at 200/208 V rated value	3 hp
— at 220/230 V rated value	3 hp
— at 460/480 V rated value	7.5 hp
— at 575/600 V rated value	10 hp
— at 575/000 V fated value	
contact rating of auxiliary contacts according to III	
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection design of the miniature circuit breaker for short-circuit protection	C characteristic: 10 A; 0.4 kA
Short-circuit protection	
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V	
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link	C characteristic: 10 A; 0.4 kA
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required	C characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA)
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required	G characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA)
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required	C characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA)
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	C characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA)  gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA)  gG: 10 A (690 V, 1 kA)
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required	G characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA)
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	C characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position	C characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting	G: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting fastening method	G: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting  fastening method  height	C characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting fastening method height width	C characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting  fastening method  height  width  depth	C characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting fastening method height width depth required spacing	C characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting  fastening method  height  width  depth  required spacing  • with side-by-side mounting	C characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface  Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting fastening method  height  width  depth  required spacing  • with side-by-side mounting  — forwards	C characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting fastening method  height  width  depth  required spacing  • with side-by-side mounting  — forwards  — upwards	C characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface  Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting  fastening method  height  width  depth  required spacing  • with side-by-side mounting  — forwards  — upwards  — downwards	G: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting  fastening method  height  width  depth  required spacing  • with side-by-side mounting  — forwards  — upwards  — downwards  — downwards  — at the side	G: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting fastening method  height  width  depth  required spacing  • with side-by-side mounting  — forwards  — upwards  — downwards  — at the side  • for grounded parts  — forwards	G: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm  10 mm 10 mm 10 mm 10 mm 10 mm
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting  fastening method  height  width  depth  required spacing  • with side-by-side mounting  — forwards  — upwards  — downwards  — at the side  • for grounded parts  — forwards  — upwards  — forwards  — upwards	C characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface  Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm  10 mm 10 mm 10 mm 10 mm
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting  fastening method  height  width  depth  required spacing  • with side-by-side mounting  — forwards  — upwards  — downwards  — at the side  • for grounded parts  — forwards  — upwards  — upwards  — at the side	C characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm  10 mm 10 mm 10 mm 10 mm 10 mm 10 mm
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting  fastening method  height  width  depth  required spacing  • with side-by-side mounting  — forwards  — upwards  — downwards  — at the side  • for grounded parts  — forwards  — upwards  — at the side  — downwards  — at the side  — downwards	C characteristic: 10 A; 0.4 kA  gG: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface  Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm  10 mm 10 mm 10 mm 10 mm
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting  fastening method  height  width  depth  required spacing  • with side-by-side mounting  — forwards  — upwards  — downwards  — at the side  • for grounded parts  — forwards  — upwards  — at the side  • downwards  — at the side  • for live parts	G: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface  Yes  screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm  10 mm 10 mm 10 mm 10 mm 10 mm 10 mm
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting  fastening method  height  width  depth  required spacing  • with side-by-side mounting  — forwards  — upwards  — downwards  — at the side  • for grounded parts  — forwards  — upwards  — at the side  — downwards  — for live parts  — forwards	G: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface  Yes  screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm  10 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method side-by-side mounting  fastening method  height  width  depth  required spacing  • with side-by-side mounting  — forwards  — upwards  — downwards  — at the side  • for grounded parts  — forwards  — upwards  — at the side  • downwards  — at the side  • for live parts	G: 50 A (690 V,100 kA), aM: 20 A (690 V,100 kA), BS88: 35 A (415 V,80 kA) gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)  +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface  Yes  screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm  10 mm 10 mm 10 mm 10 mm 10 mm 10 mm

— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
• for main current circuit	Ring cable lug connection
<ul> <li>for auxiliary and control circuit</li> </ul>	ring terminal lug connection
<ul> <li>at contactor for auxiliary contacts</li> </ul>	Ring cable lug connection
of magnet coil	Ring cable lug connection
type of connectable conductor cross-sections	
<ul> <li>for main contacts</li> </ul>	
— solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²
Safety related data	
product function	
<ul> <li>mirror contact according to IEC 60947-4-1</li> </ul>	Yes
<ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>	No
suitable for safety function	Yes
suitability for use safety-related switching OFF	Yes
service life maximum	20 a
test wear-related service life necessary	Yes
proportion of dangerous failures	
<ul> <li>with low demand rate according to SN 31920</li> </ul>	40 %
with high demand rate according to SN 31920	73 %
B10 value with high demand rate according to SN 31920	1 000 000
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
ISO 13849	
device type according to ISO 13849-1	3
overdimensioning according to ISO 13849-2 necessary	Yes
IEC 61508	
safety device type according to IEC 61508-2	Type A
Electrical Safety	
protection class IP on the front according to IEC 60529	IP00
Communication/ Protocol	
product function bus communication	No
Approvals Certificates	
General Product Approval	













<u>KC</u>

General Product Approval

EMV

**Test Certificates** 

Maritime application





Type Test Certificates/Test Report

Special Test Certificate





Maritime application







Miscellaneous

other









other

Railway

Dangerous goods

Environment



Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information for data generation and storage

https://support.industry.siemens.com/cs/ww/en/view/109995012

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2017-4KB42-0LA0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2017-4KB42-0LA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2017-4KB42

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


 $\underline{\text{http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2017-4KB42-0LA0\&lang=en}}$ 


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2017-4KB42-0LA0/char


Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2017-4KB42-0LA0&objecttype=14&gridview=view1







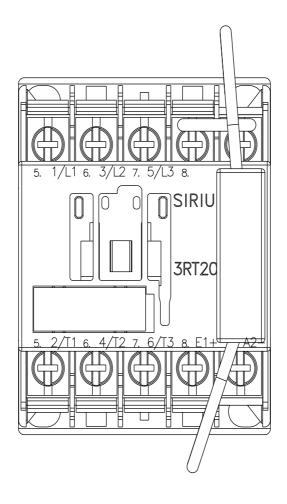

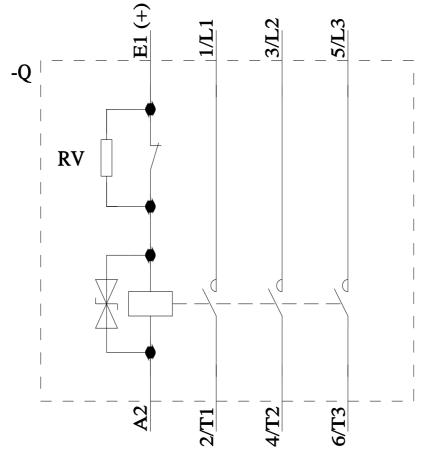

last modified: 9/5/2025 🖸