Data sheet

3RT2018-4KB42-0LA0



traction contactor, AC-3e/AC-3, 16 A, 7.5 kW / 400 V, 3-pole, 24 V DC, 0.7-1.25 * Uc, with integrated suppressor diode, auxiliary contacts: 1 NC, ring cable lug connection, frame size: S00, with plugged on series resistor

product brand name	SIRIUS
product designation	Power contactor
design of the product	With extended operating range
product type designation	3RT2
General technical data	
size of contactor	S00
product extension	
 function module for communication 	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	6.6 W
 at AC in hot operating state per pole 	2.2 W
without load current share typical	4 W
type of calculation of power loss depending on pole	quadratic
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
of main circuit rated value	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at DC	7.3g / 5 ms, 4.7g / 10 ms
shock resistance with sine pulse	
• at DC	11,4g / 5 ms, 7,3g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	30 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
of the contactor with added auxiliary switch block typical	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Lead - 7439-92-1
Weight	0.297 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-40 +70 °C
during storage	-55 +80 °C
relative humidity minimum	10 %

relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Environmental footprint	
Environmental Product Declaration(EPD)	Yes
global warming potential [CO2 eq] total	153 kg
global warming potential [CO2 eq] during manufacturing	1.42 kg
global warming potential [CO2 eq] during operation	152 kg
global warming potential [CO2 eq] after end of life	-0.305 kg
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
at AC-3 rated value maximum	690 V
at AC-3e rated value maximum	690 V
operational current	••••
at AC-1 at 400 V at ambient temperature 40 °C rated	22 A
value	22 A
• at AC-1	
 up to 690 V at ambient temperature 40 °C rated value 	22 A
— up to 690 V at ambient temperature 60 $^{\circ}\text{C}$ rated value	20 A
at AC-2 at 400 V rated valueat AC-3	16 A
— at 400 V rated value	16 A
— at 500 V rated value	12.4 A
— at 690 V rated value	8.9 A
• at AC-3e	0.00
— at 400 V rated value	16 A
— at 500 V rated value	12.4 A
— at 690 V rated value	8.9 A
at AC-4 at 400 V rated value	11.5 A
minimum cross-section in main circuit	11.3 A
at maximum AC-1 rated value	4 mm²
operational current for approx. 200000 operating cycles at	7 11111
AC-4	
at 400 V rated value	5.5 A
at 690 V rated value	4.4 A
operational current	
at 1 current path at DC-1	
— at 24 V rated value	20 A
— at 110 V rated value	2.1 A
— at 220 V rated value	0.8 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
with 2 current paths in series at DC-1	0.071
— at 24 V rated value	20 A
— at 24 V rated value — at 110 V rated value	12 A
— at 110 V rated value — at 220 V rated value	1.6 A
— at 440 V rated value	0.8 A
— at 600 V rated value	0.7 A
with 3 current paths in series at DC-1 of 24 V reted value.	20. A
— at 24 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	20 A
— at 440 V rated value	1.3 A
— at 600 V rated value	1 A
 at 1 current path at DC-3 at DC-5 	
— at 24 V rated value	20 A
— at 110 V rated value	0.1 A
 with 2 current paths in series at DC-3 at DC-5 	
 at 24 V rated value 	20 A

— at 110 V rated value	0.35 A
 with 3 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	1.5 A
— at 440 V rated value	0.2 A
— at 600 V rated value	0.2 A
operating power	
• at AC-2 at 400 V rated value	7.5 kW
• at AC-3	
— at 230 V rated value	4 kW
— at 400 V rated value	7.5 kW
— at 500 V rated value	7.5 kW
— at 690 V rated value	7.5 kW
• at AC-3e	
— at 230 V rated value	4 kW
— at 400 V rated value	7.5 kW
— at 500 V rated value	7.5 kW
— at 690 V rated value	7.5 kW
operating power for approx. 200000 operating cycles at AC-	
4	
at 400 V rated value	2.5 kW
at 690 V rated value	3.5 kW
short-time withstand current in cold operating state up to	
40 °C	000 A II
limited to 1 s switching at zero current maximum	300 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 5 s switching at zero current maximum 	169 A; Use minimum cross-section acc. to AC-1 rated value
Iimited to 10 s switching at zero current maximum	128 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 30 s switching at zero current maximum 	92 A; Use minimum cross-section acc. to AC-1 rated value
Iimited to 60 s switching at zero current maximum	74 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at DC	1 500 1/h
operating frequency	
 at AC-2 at AC-3e maximum 	750 1/h
at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage	DC
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	24 V
operating range factor control supply voltage rated value of magnet coil at DC	
initial value	0.7
full-scale value	1.25
design of the surge suppressor	suppressor diode
closing power of magnet coil at DC	13 W
holding power of magnet coil at DC	4 W
closing delay	
• at DC	25 130 ms
opening delay	
• at DC	7 20 ms
arcing time	10 15 ms
control version of the switch operating mechanism	E1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts	1
operational current at AC-12 maximum	10 A
operational current at AC-15	
at 230 V rated value	10 A
at 400 V rated value	3 A
at 500 V rated value	2 A
at 690 V rated value	1 A
operational current at DC-12	

 at 24 V rated value 	10 A
at 48 V rated value	6 A
at 60 V rated value	6 A
at 110 V rated value	3 A
at 125 V rated value	2 A
at 220 V rated value	1 A
at 600 V rated value	0.15 A
operational current at DC-13	
• at 24 V rated value	10 A
• at 48 V rated value	2 A
at 60 V rated value	2 A
	1A
at 110 V rated value	
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	14 A
at 600 V rated value	11 A
yielded mechanical performance [hp]	
• for single-phase AC motor	
— at 110/120 V rated value	1 hp
— at 230 V rated value	2 hp
• for 3-phase AC motor	
— at 200/208 V rated value	3 hp
— at 220/230 V rated value	5 hp
— at 460/480 V rated value	10 hp
— at 575/600 V rated value	10 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	7,000 7 @000
design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V	C characteristic: 10 A; 0.4 kA
of the auxiliary circuit up to 230 V	C characteristic: 10 A; 0.4 kA
of the auxiliary circuit up to 230 V design of the fuse link	C characteristic: 10 A; 0.4 kA
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit	
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA)
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA)
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA)
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA)
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing • with side-by-side mounting	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing • with side-by-side mounting — forwards	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing • with side-by-side mounting	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing • with side-by-side mounting — forwards	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing • with side-by-side mounting — forwards — upwards	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — downwards — at the side	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm 10 mm 10 mm 10 mm 10 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm 10 mm 10 mm 10 mm 10 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — torwards — upwards — torwards — at the side • for grounded parts — forwards — upwards	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm 10 mm 10 mm 10 mm 10 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — upwards — at the side • for grounded parts — forwards — upwards — upwards — at the side	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — at the side — downwards — at the side — downwards	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards — at the side — downwards — at the side — downwards — at the side — forwards — upwards — at the side — forwards — at the side — forwards — at the side — forwards	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side • downwards — at the side — downwards — at the side — forwards — upwards — at the side — forwards — upwards — at the side — forwards — upwards — at the side — downwards • for live parts — forwards — upwards	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm
of the auxiliary circuit up to 230 V design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of coordination 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method side-by-side mounting fastening method height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards — at the side — downwards — at the side — downwards — at the side — forwards — upwards — at the side — forwards — at the side — forwards — at the side — forwards	gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA) gG: 25 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 25 A (415 V, 80 kA) gG: 10 A (690 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface Yes screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 61 mm 45 mm 117 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm

Connections/ Terminals	
type of electrical connection	
for main current circuit	Ring cable lug connection
for auxiliary and control circuit	ring terminal lug connection
at contactor for auxiliary contacts	Ring cable lug connection
of magnet coil	Ring cable lug connection
type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²
Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes
 positively driven operation according to IEC 60947-5-1 	No
suitable for safety function	Yes
suitability for use safety-related switching OFF	Yes
service life maximum	20 a
test wear-related service life necessary	Yes
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
with high demand rate according to SN 31920	73 %
B10 value with high demand rate according to SN 31920	1 000 000
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
ISO 13849	
device type according to ISO 13849-1	3
overdimensioning according to ISO 13849-2 necessary	Yes
IEC 61508	
safety device type according to IEC 61508-2	Type A
Electrical Safety	
protection class IP on the front according to IEC 60529	IP00
Communication/ Protocol	
product function bus communication	No
Approvals Certificates	
General Product Approval	













<u>KC</u>

General Product Approval

EMV

Test Certificates

Maritime application





Special Test Certific-<u>ate</u>

Type Test Certificates/Test Report





Maritime application









Miscellaneous

other







other

Confirmation

Special Test Certific-<u>ate</u>

Transport Information

Dangerous goods



Environment

Environmental Confirmations

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information for data generation and storage

https://support.industry.siemens.com/cs/ww/en/view/109995012

Information- and Downloadcenter (Catalogs, Brochures,...)

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2018-4KB42-0LA0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2018-4KB42-0LA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2018-4KB42-0LA0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2018-4KB42-0LA0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2018-4KB42-0LA0/char


Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2018-4KB42-0LA0&objecttype=14&gridview=view1



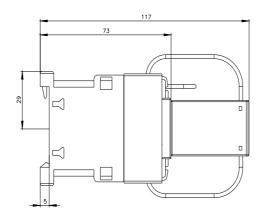



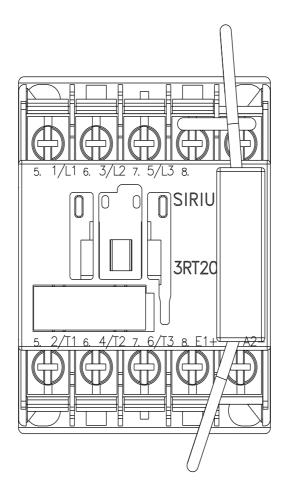

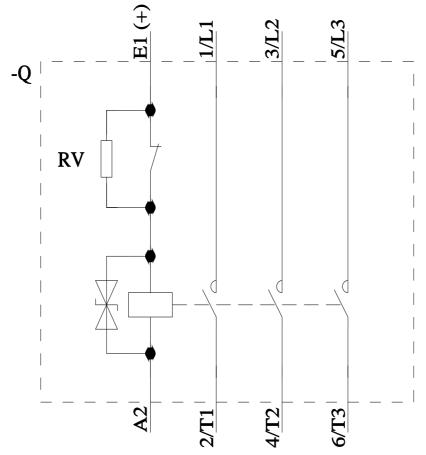

last modified: 9/5/2025 🖸