

1. Features




- Terminal antenna for 4G/3G/2G applications
- LTE, HSPA+, WCDMA, CDMA, GSM, GPRS, DCS1800, PCS1900
- LTE bands: 1-21; 23-30; 33-41
- 698-960MHz, 1427-1660MHz, 1710-2170MHz, 2300-2400MHz, 2500-2690MHz
- High performance dipole design
- Available in three terminal options: swivel, fly lead and fixed 90° (IP67)

2. Description

Draco is constructed with an ergonomic blade design to blend well to the outside of a device. Three versions are available, including an IP67 design for outdoor applications. The antenna is designed to work to various GND plane sizes or in free space for ease of integration.


3. Applications

- Routers
- Industrial devices
- Remote devices
- ISM

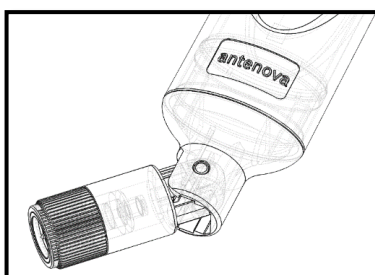

4. Part Number

Note. -xxx refers to options for antenna version, connector type and cable length:

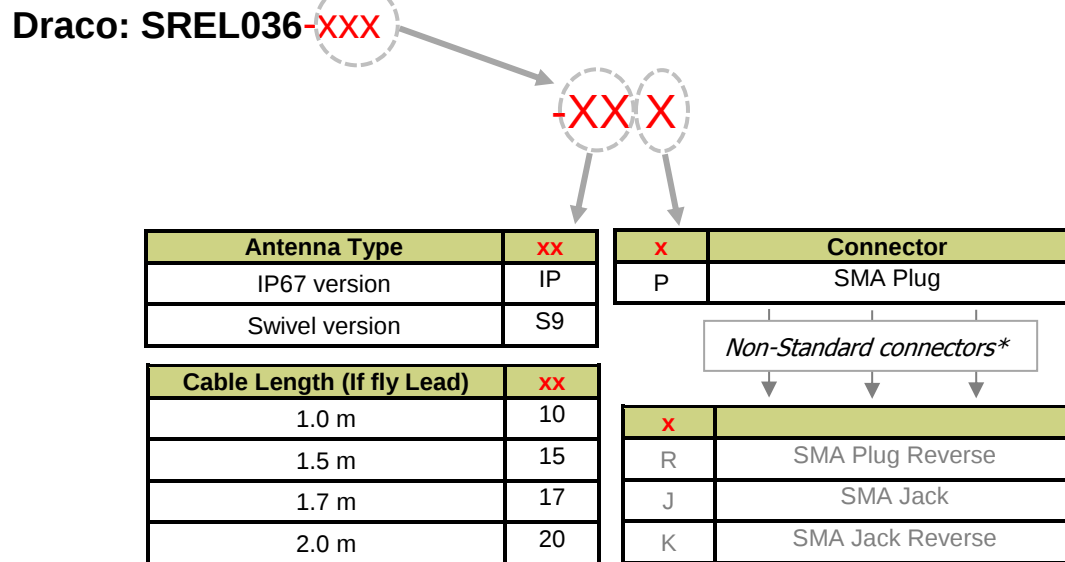

**Please contact Antenova for details on non-standard connector types*

5. General Data




Product name	Draco
Part Number	SREL036-xxx
Frequency	698-960 MHz 1427-1660MHz 1720-2170MHz 2300-2400MHz 2500-2690MHz
Polarization	Linear
Operating temperature	-20°C to +70°C
Impedance with matching	50 Ω
Weight	< 21g (Cable not included)
Dimensions (Antenna)	See dimensions from page 18>
Cable length (Fly lead only)	1.0m /2.0m *
Connection	SMA Plug (Standard)
Radome Material	PC




**Please contact Antenova for details on other cable lengths*

6. RF Characteristics

The RF characteristics are shown for each type.

	698 – 960 MHz		
	Fixed (IP67)	Hinged	Fly Lead (1.0m)
			
Peak gain	2.46dBi	2.18dBi	1.23dBi
Average gain	-2.26dBi	-2.32dBi	-3.10dBi
Average efficiency	>55%	>56%	>45%
Maximum return loss	<-5.30dB	<-5.56dB	<-6.65dB
Maximum VSWR	3.30:1	3.25 :1	2.60:1

	1420 – 1660 MHz		
	Fixed (IP67)	Hinged	Fly Lead (1.0m)
			
Peak gain	2.07dBi	1.92dBi	1.23dBi
Average gain	-2.63dBi	-2.59dBi	-3.38dBi
Average efficiency	>53%	>55%	>48%
Maximum return loss	<-7.50dB	<-7.50dB	<-14.90dB
Maximum VSWR	2.40:1	2.40:1	1.40:1

	1720 – 2170 MHz		
	Fixed (IP67)	Hinged	Fly Lead (1.0m)
			
Peak gain	3.33dBi	3.29dBi	1.73dBi
Average gain	-2.33dBi	-2.35dBi	-3.33dBi
Average efficiency	>57%	>57%	>46%
Maximum return loss	<-7.80dB	<-7.60dB	<-10.10dB
Maximum VSWR	2.30:1	2.40:1	1.90:1


	2300 – 2400 MHz		
	Fixed (IP67)	Hinged	Fly Lead (1.0m)
Peak gain	3.29dBi	3.23dBi	1.51dBi
Average gain	-1.81dBi	-2.12dBi	-3.17dBi
Average efficiency	>65%	>60%	>48%
Maximum return loss	<-8.90dB	<-9.40dB	<-14.11dB
Maximum VSWR	2.10:1	2.00:1	1.50:1

	2500 – 2690 MHz		
	Fixed (IP67)	Hinged	Fly Lead (1.0m)
Peak gain	4.14dBi	4.08dBi	1.59dBi
Average gain	-1.84dBi	-2.17dBi	-3.11dBi
Average efficiency	>65%	>60%	>48%
Maximum return loss	<-7.40dB	<-5.50dB	<-10.30dB
Maximum VSWR	2.50:1	3.20:1	1.90:1

Antennas for Wireless Applications


7. RF Performance

7.1 Return Loss

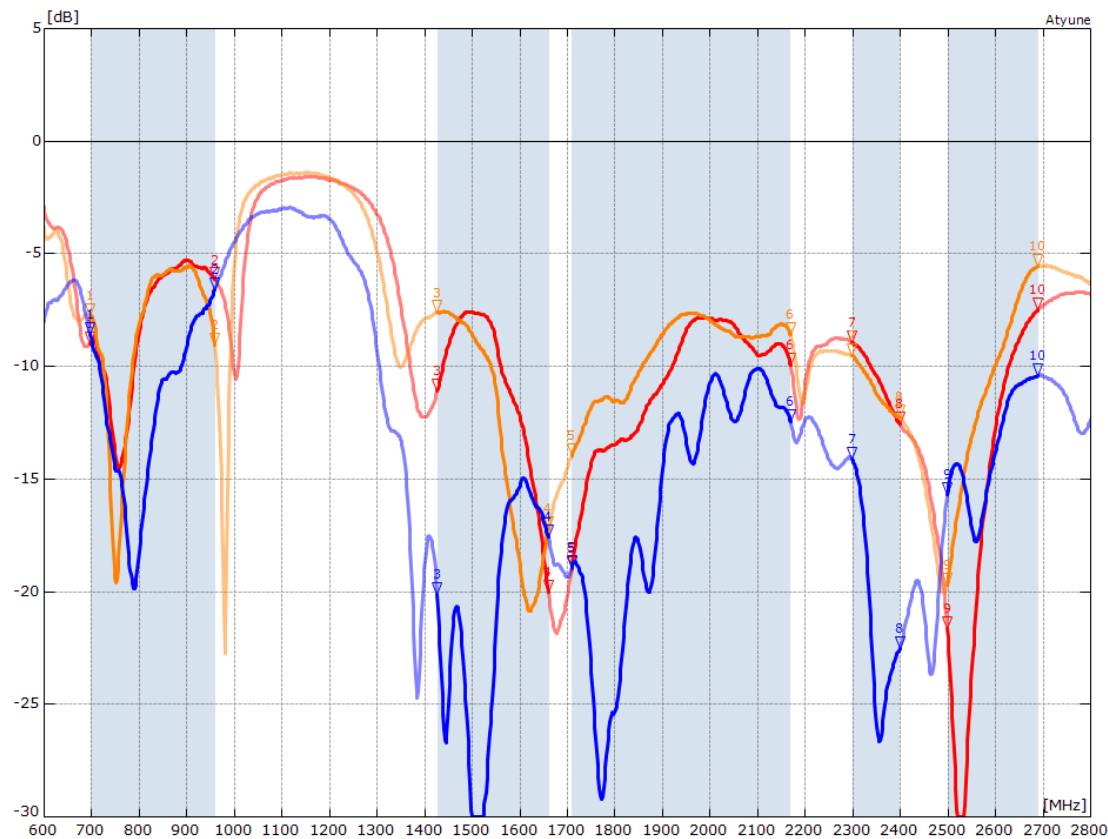

MARKERS:		MHz	dB	MHz	dB	MHz	dB	MHz	dB	MHz	dB
Fixed.S1P - S11											
	1: 698	-8.96	3: 1427	-11.07	5: 1710	-18.97	7: 2300	-8.91	9: 2500	-21.64	
	2: 960	-6.13	4: 1661	-19.98	6: 2170	-9.91	8: 2400	-12.54	10: 2690	-7.47	
Hinged.S1P - S11											
	1: 698	-7.73	3: 1427	-7.59	5: 1710	-13.95	7: 2300	-9.49	9: 2500	-19.66	
	2: 960	-9.00	4: 1661	-17.19	6: 2170	-8.57	8: 2400	-12.23	10: 2690	-5.55	
Flylead.S1P - S11											
	1: 698	-8.58	3: 1427	-20.09	5: 1710	-18.88	7: 2300	-14.11	9: 2500	-15.68	
	2: 960	-6.55	4: 1661	-17.55	6: 2170	-12.41	8: 2400	-22.48	10: 2690	-10.38	




7.2 VSWR

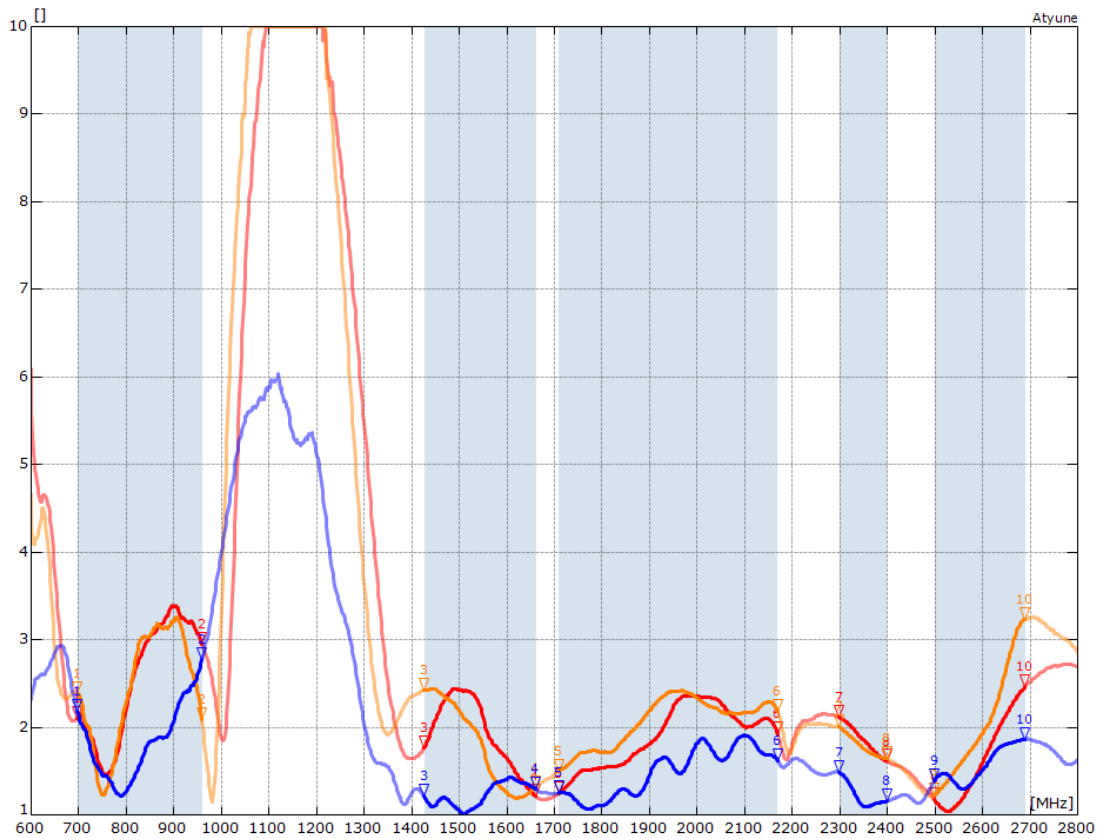

MARKERS: MHz			MHz		MHz		MHz		MHz		
Fixed.S1P - S11											
	1: 698	2.11	3: 1427	1.78	5: 1710	1.25	7: 2300	2.12	9: 2500	1.18	
	2: 960	2.95	4: 1661	1.22	6: 2170	1.94	8: 2400	1.62	10: 2690	2.47	
Hinged.S1P - S11											
	1: 698	2.39	3: 1427	2.43	5: 1710	1.50	7: 2300	2.01	9: 2500	1.23	
	2: 960	2.10	4: 1661	1.32	6: 2170	2.19	8: 2400	1.65	10: 2690	3.24	
Flylead.S1P - S11											
	1: 698	2.19	3: 1427	1.22	5: 1710	1.26	7: 2300	1.49	9: 2500	1.39	
	2: 960	2.78	4: 1661	1.31	6: 2170	1.63	8: 2400	1.16	10: 2690	1.87	




7.3 Antenna Pattern Free Space

7.3.1 698 MHz – 960 MHz *Fixed (IP67)*

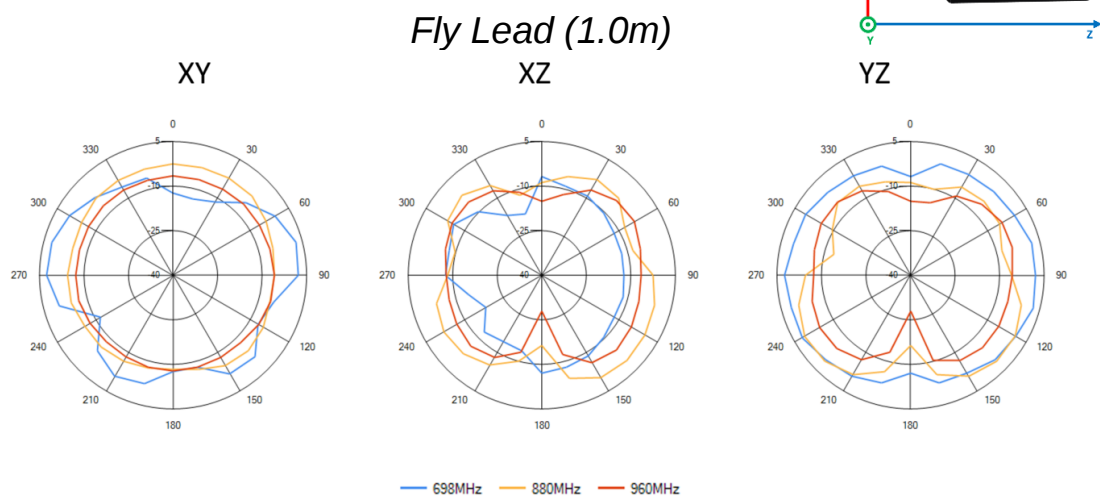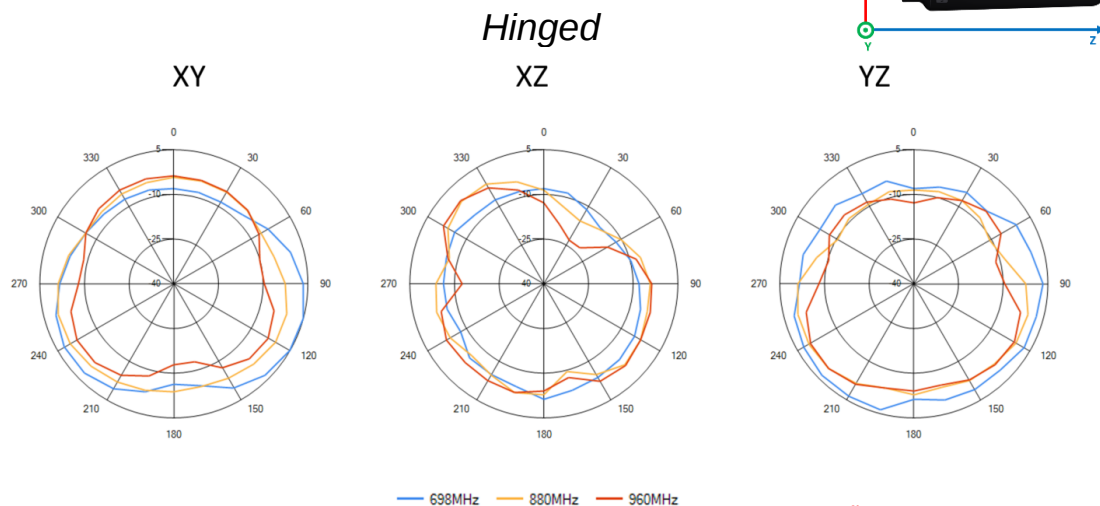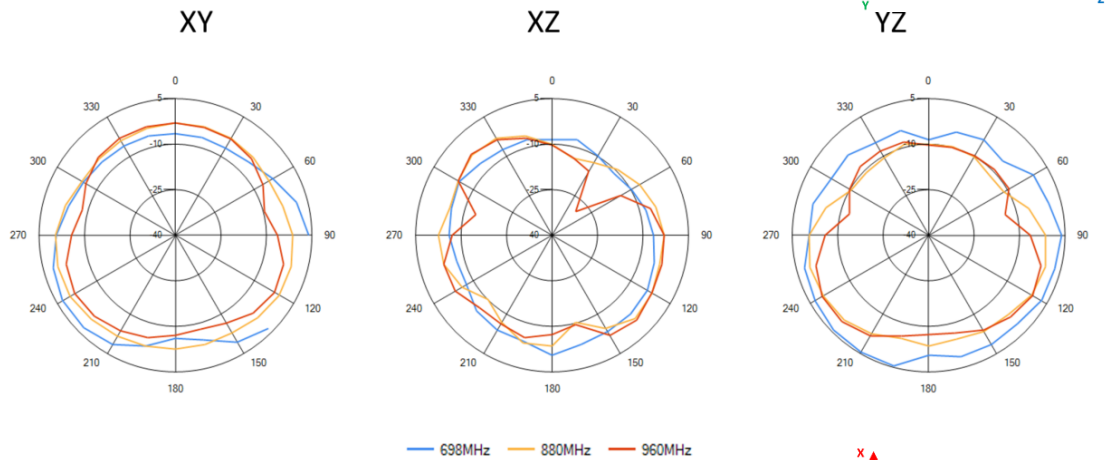

Antennas for Wireless Applications


7.3.2 1427 MHz – 1661 MHz Fixed (IP67)

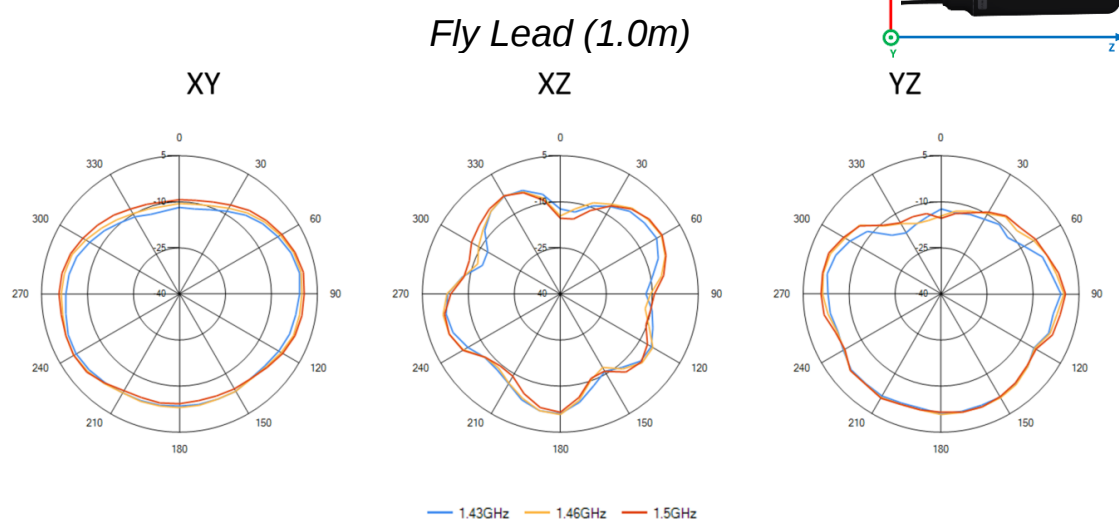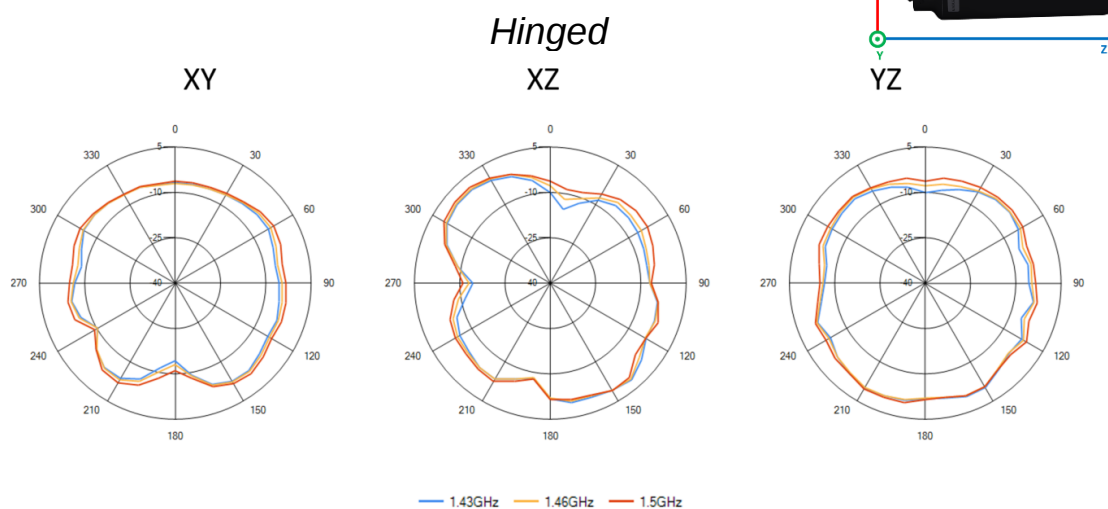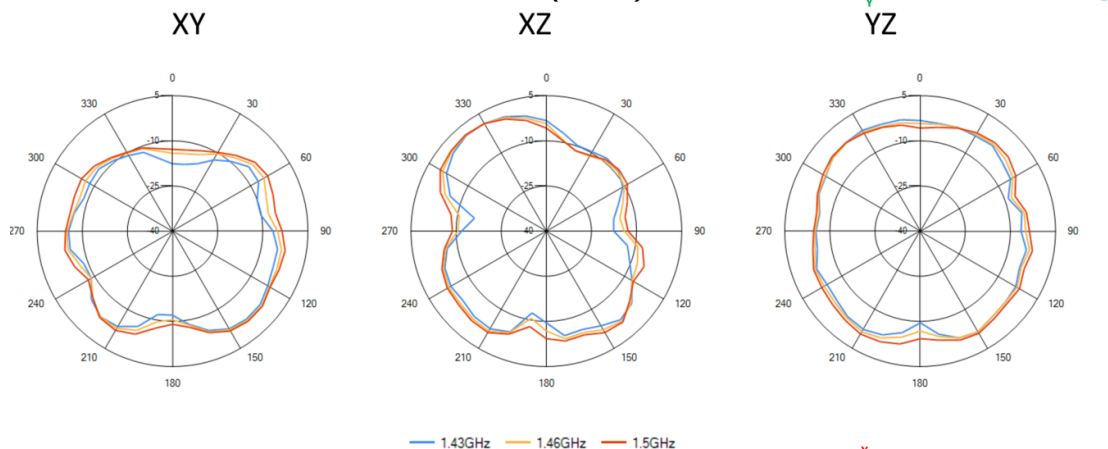


Antennas for Wireless Applications

7.3.3 1710 MHz – 2170 MHz


Fixed (IP67)

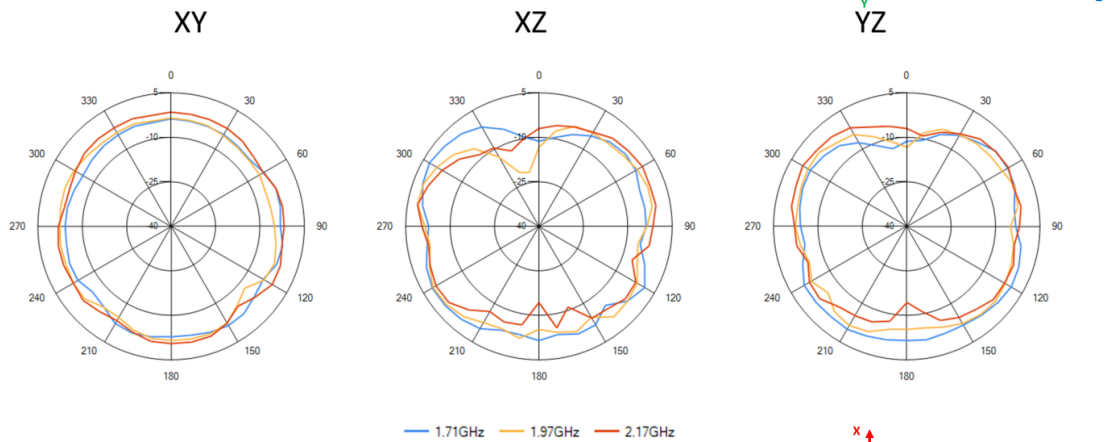

Hinged

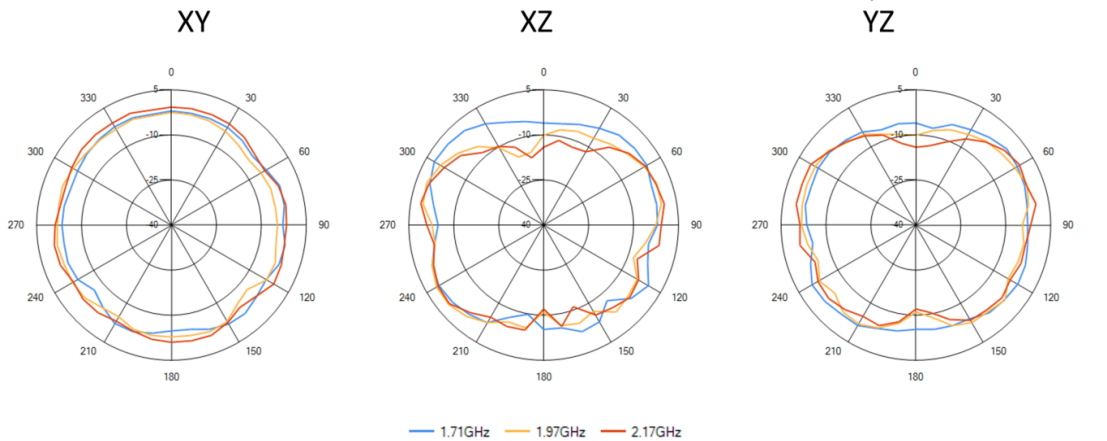


Fly Lead (1.0m)

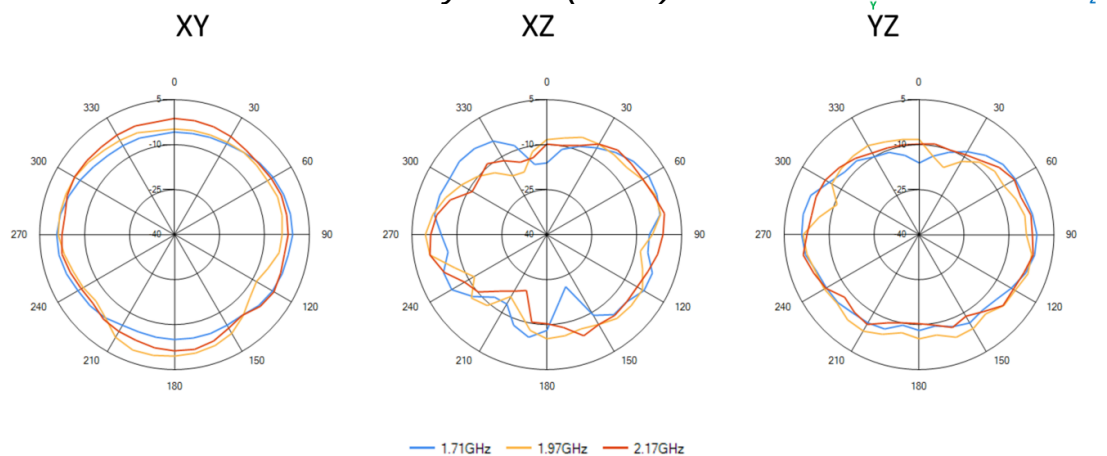


Antennas for Wireless Applications

7.3.4 2300 MHz – 2400 MHz


Fixed (IP67)

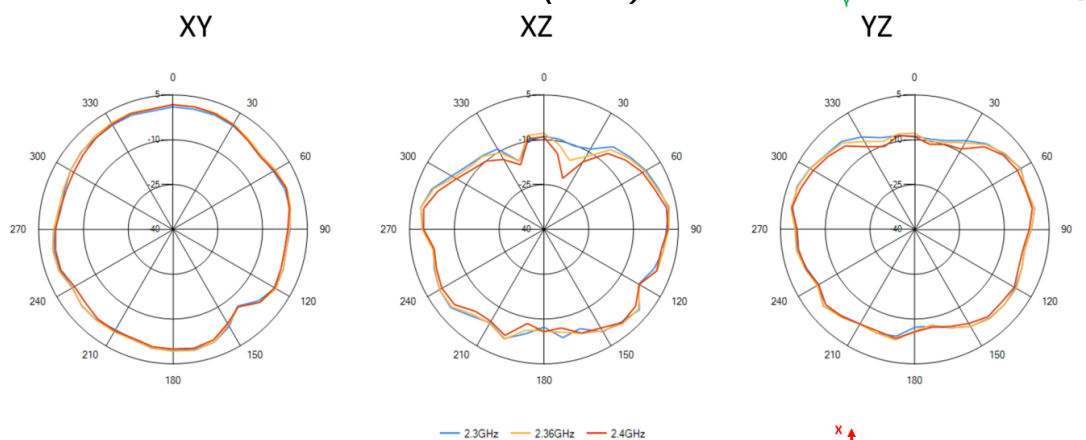

Hinged

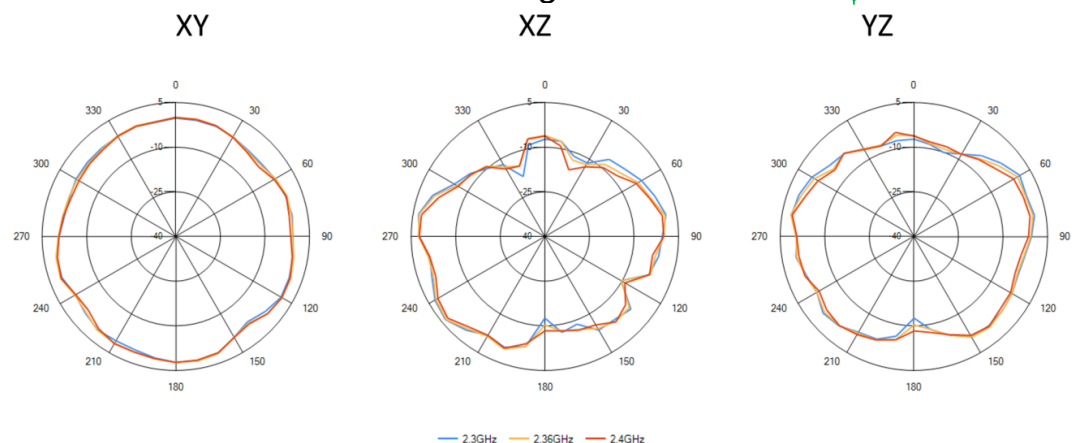


Fly Lead (1.0m)

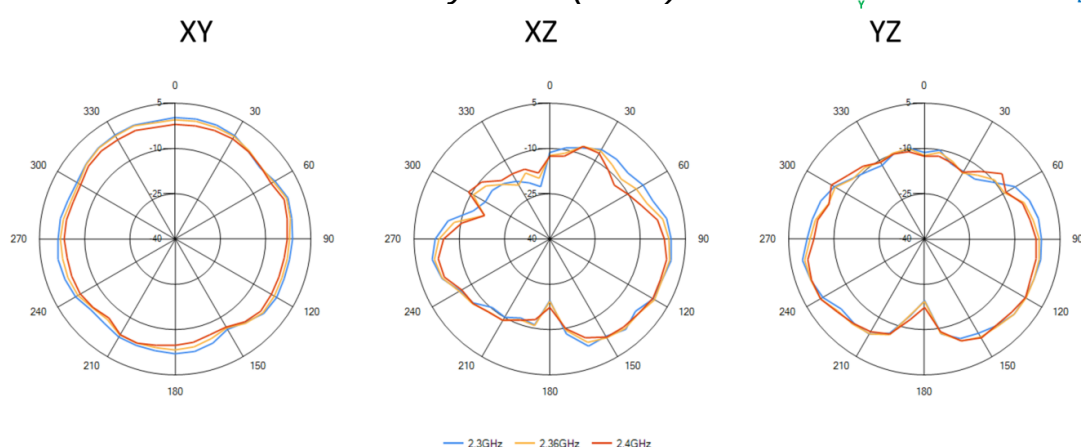


7.3.5 2500 MHz – 2690 MHz


Fixed (IP67)

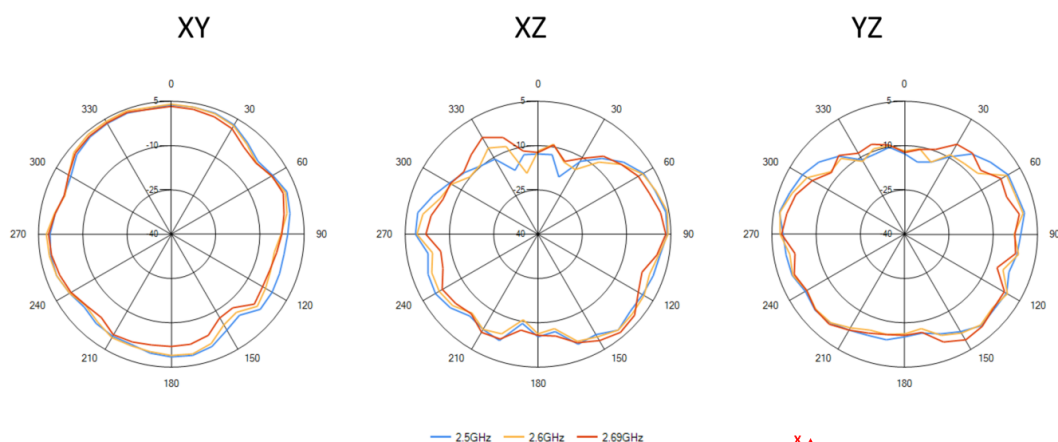

Hinged

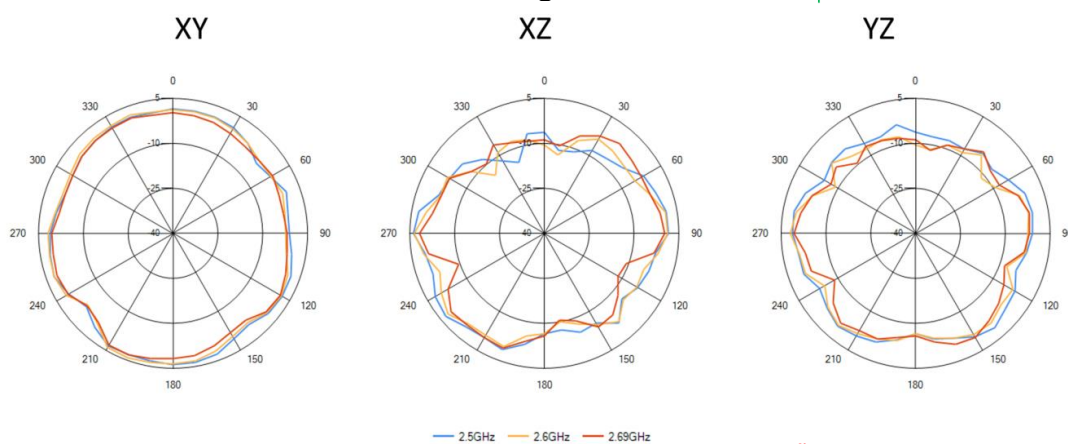

Fly Lead (1.0m)

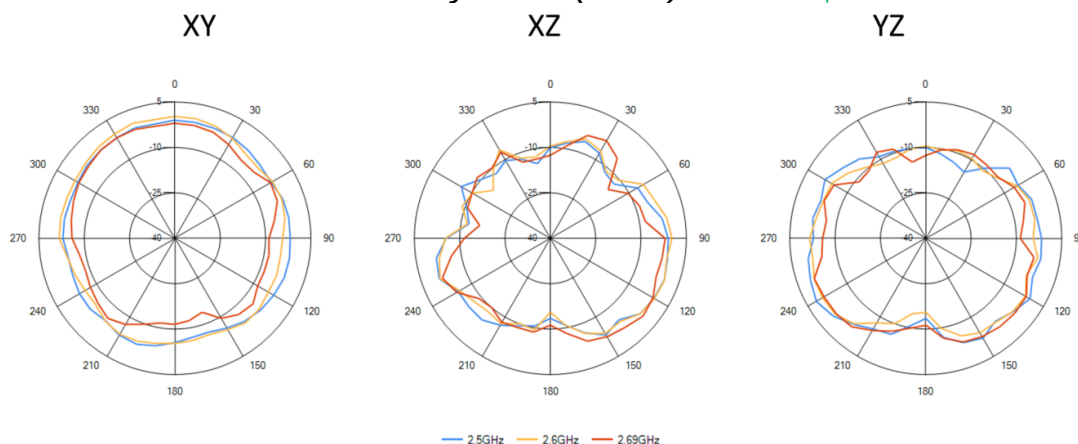


7.4 Antenna Pattern Free Space (3D)

7.4.1 698 MHz – 960 MHz


3D patterns at 746MHz

*Drag to rotate pattern and PCB by using Adobe Reader
(Click to Activate)*


Fixed (IP67)

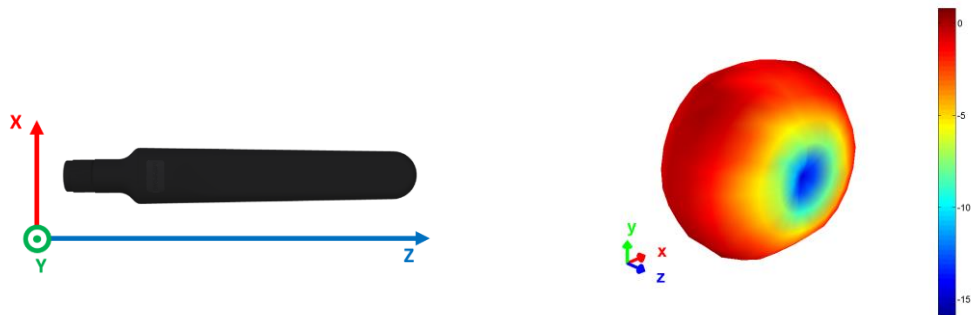

Hinged

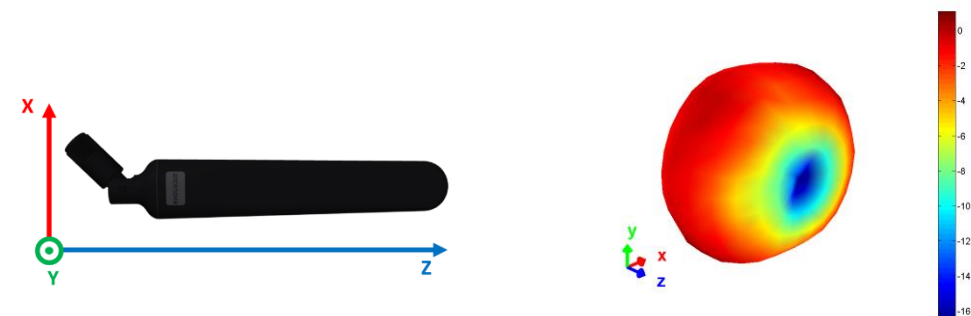


Fly Lead (1.0m)

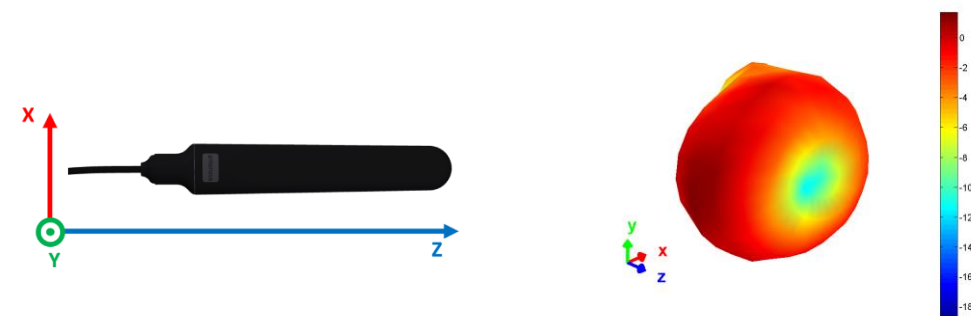


7.4.2 1427 MHz – 1661 MHz 3D patterns at 1500MHz

*Drag to rotate pattern and PCB by using Adobe Reader
(Click to Activate)*

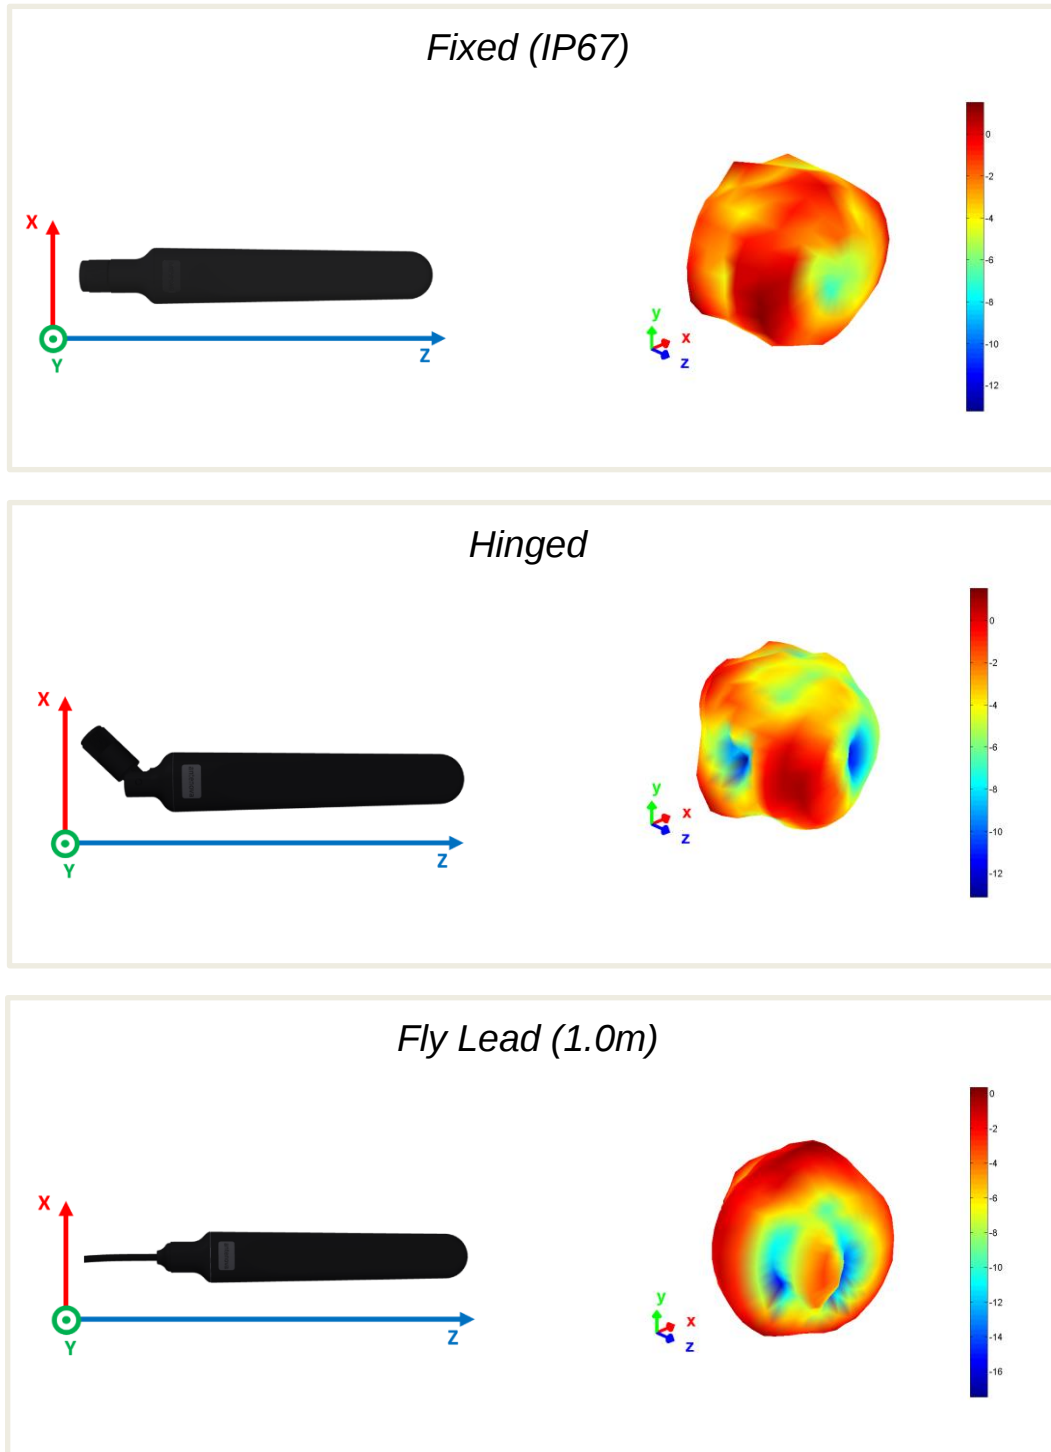


7.4.3 1710 MHz – 2170 MHz 3D patterns at 1930MHz

*Drag to rotate pattern and PCB by using Adobe Reader
(Click to Activate)*

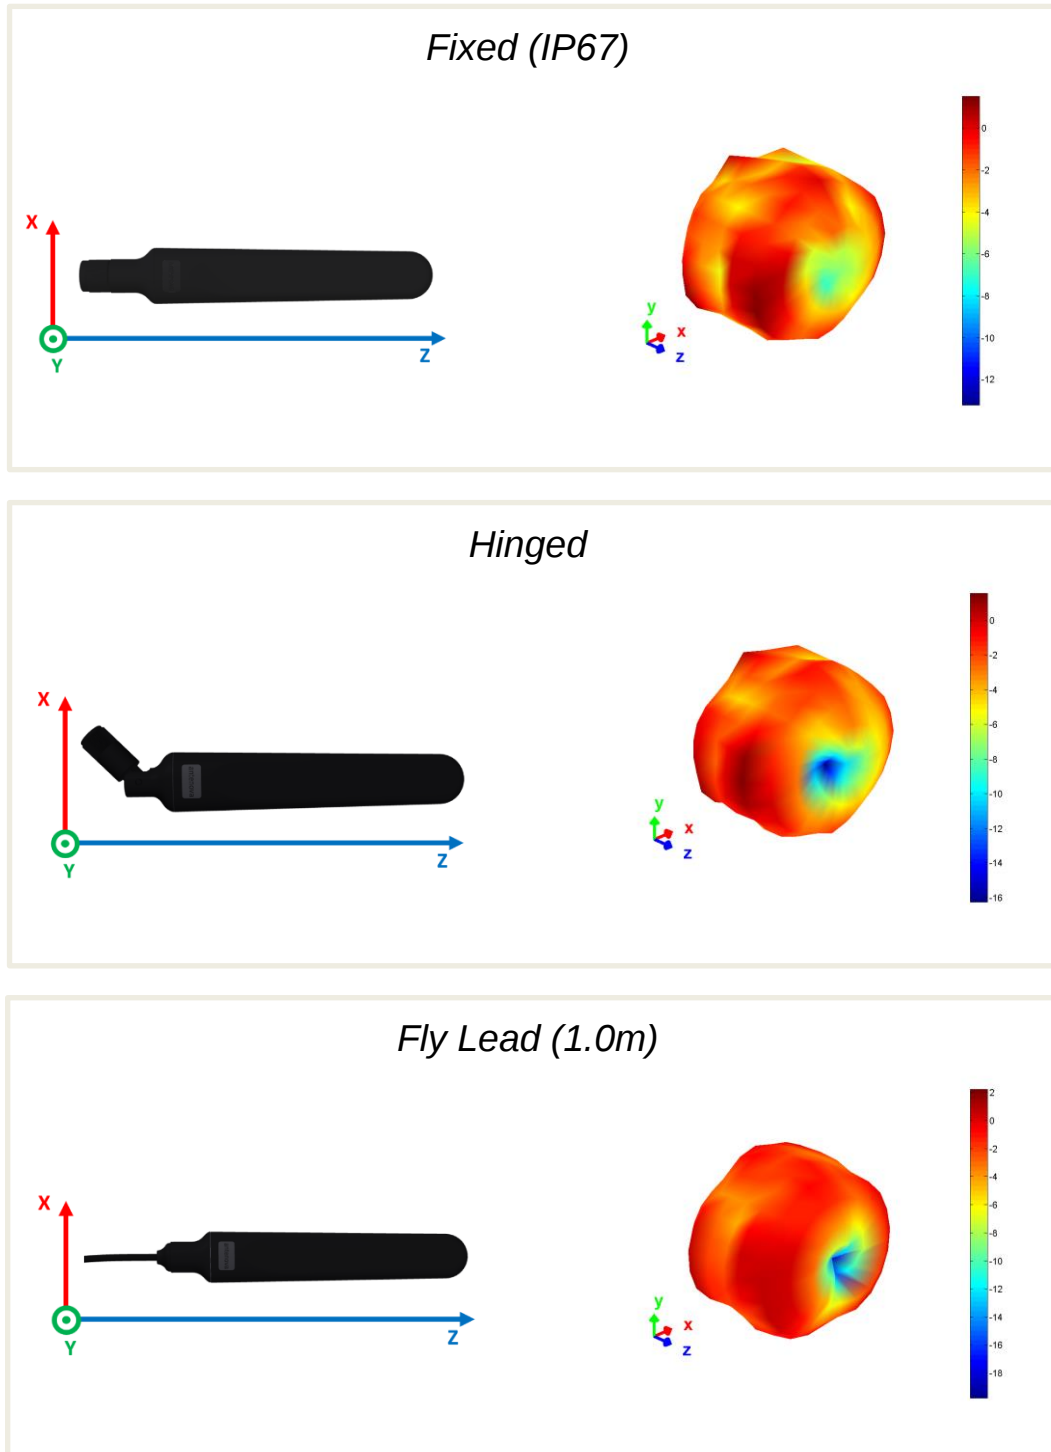


7.4.4 2300 MHz – 2400 MHz 3D patterns at 2350MHz

*Drag to rotate pattern and PCB by using Adobe Reader
(Click to Activate)*

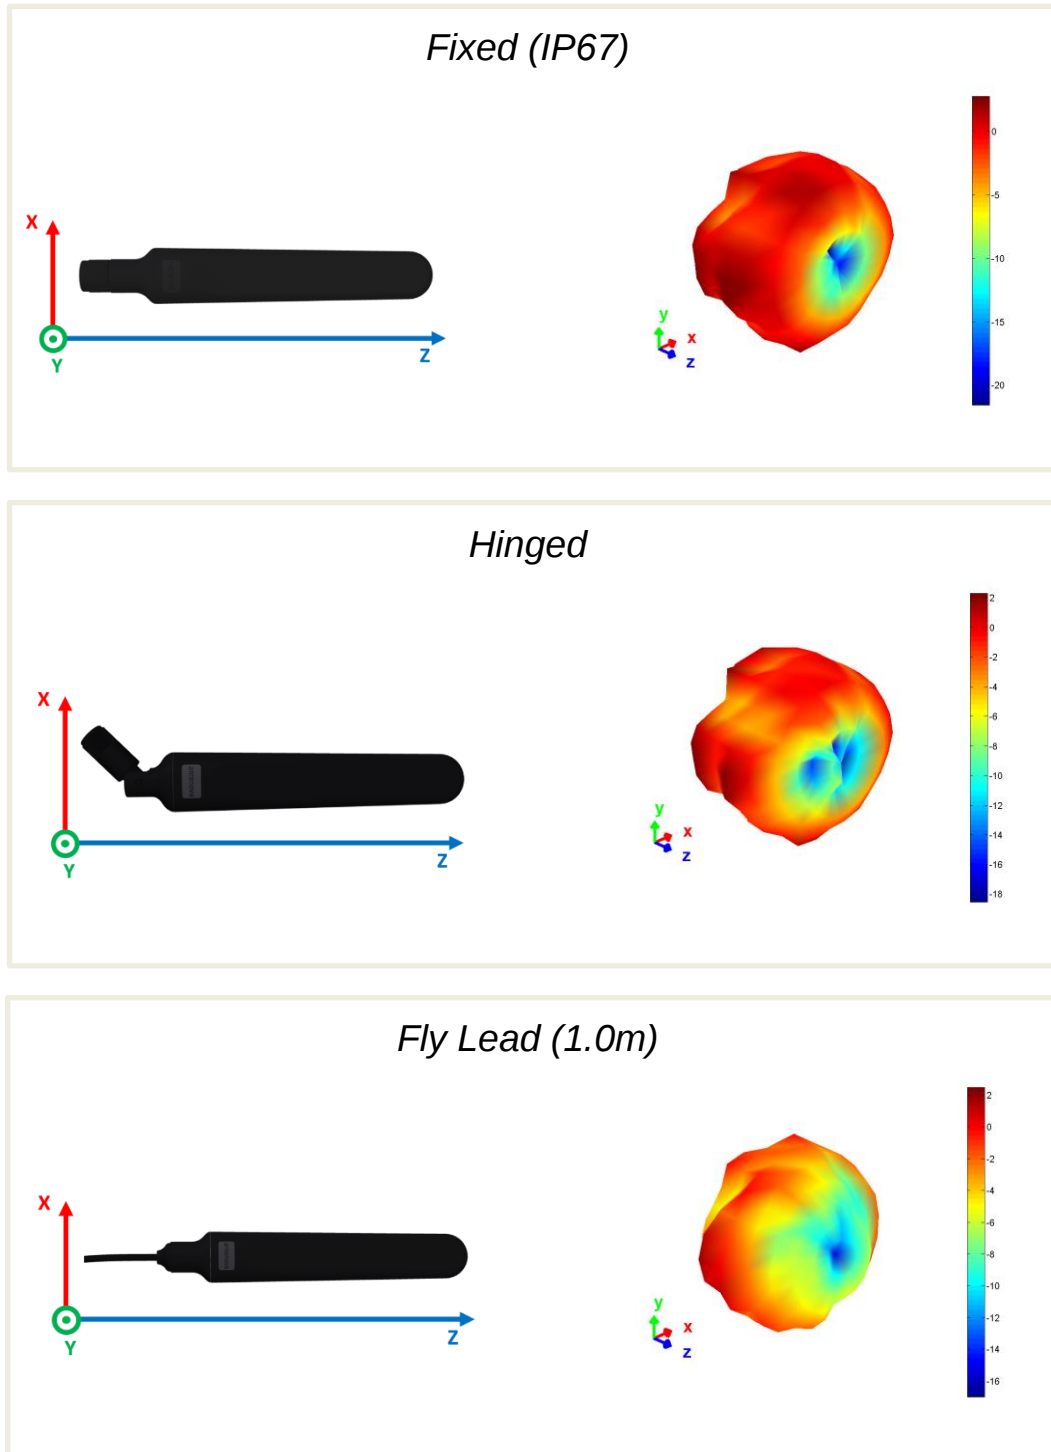


7.4.5 2500 MHz – 2690 MHz 3D patterns at 2600MHz

*Drag to rotate pattern and PCB by using Adobe Reader
(Click to Activate)*

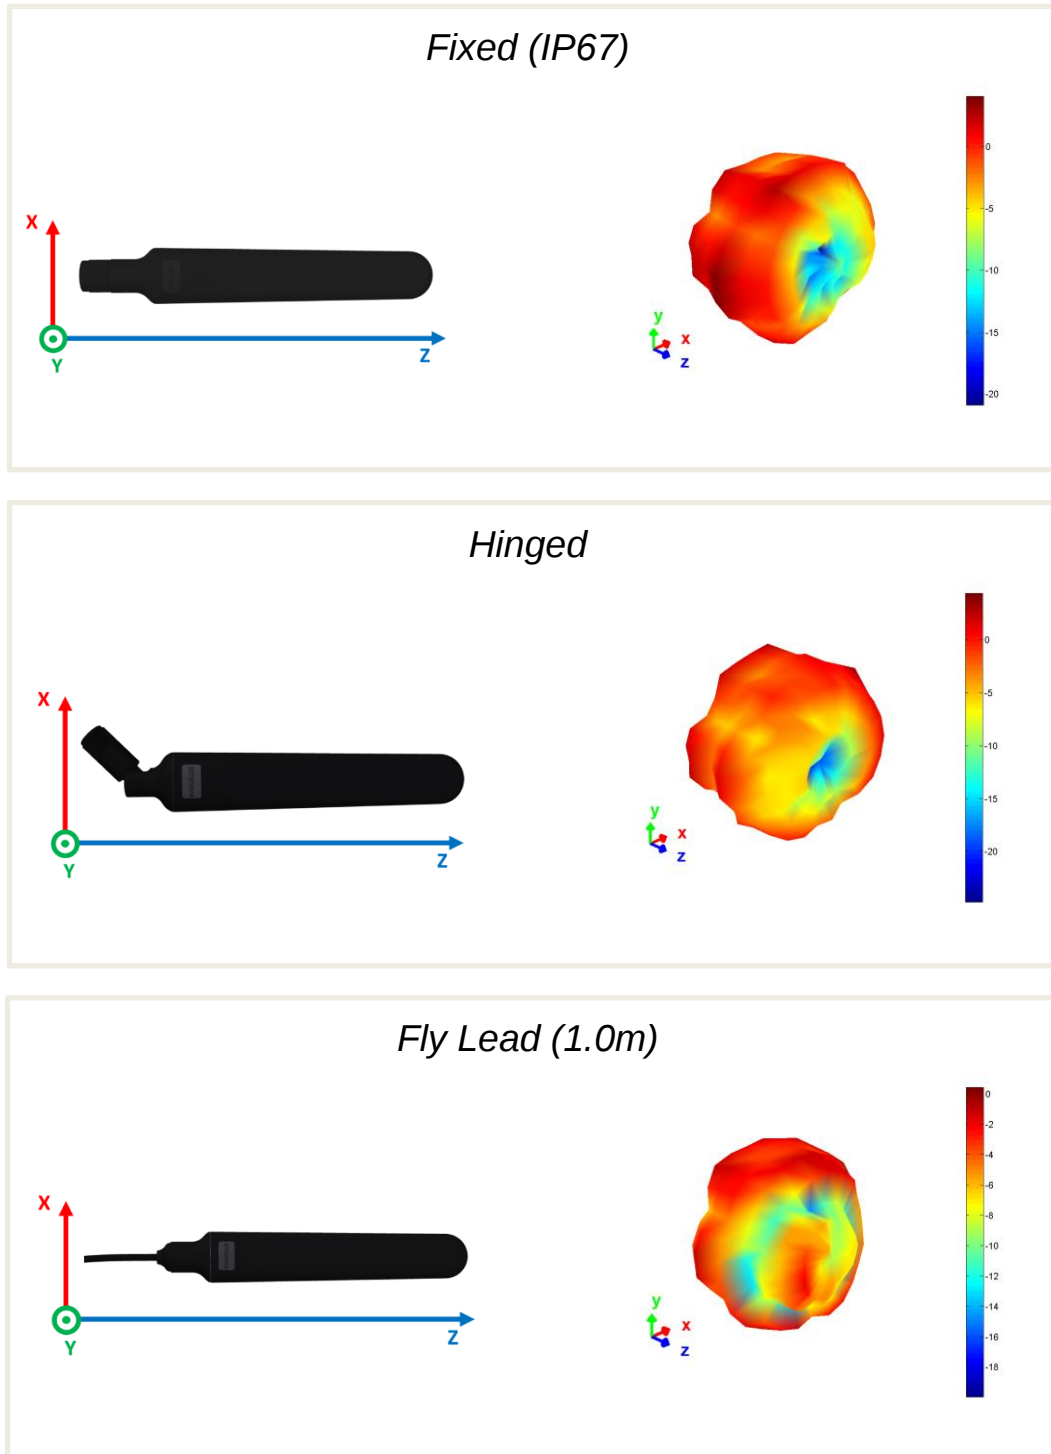


8. Antenna Dimensions

8.1 Dimensions Fixed (SREL036-IPP)

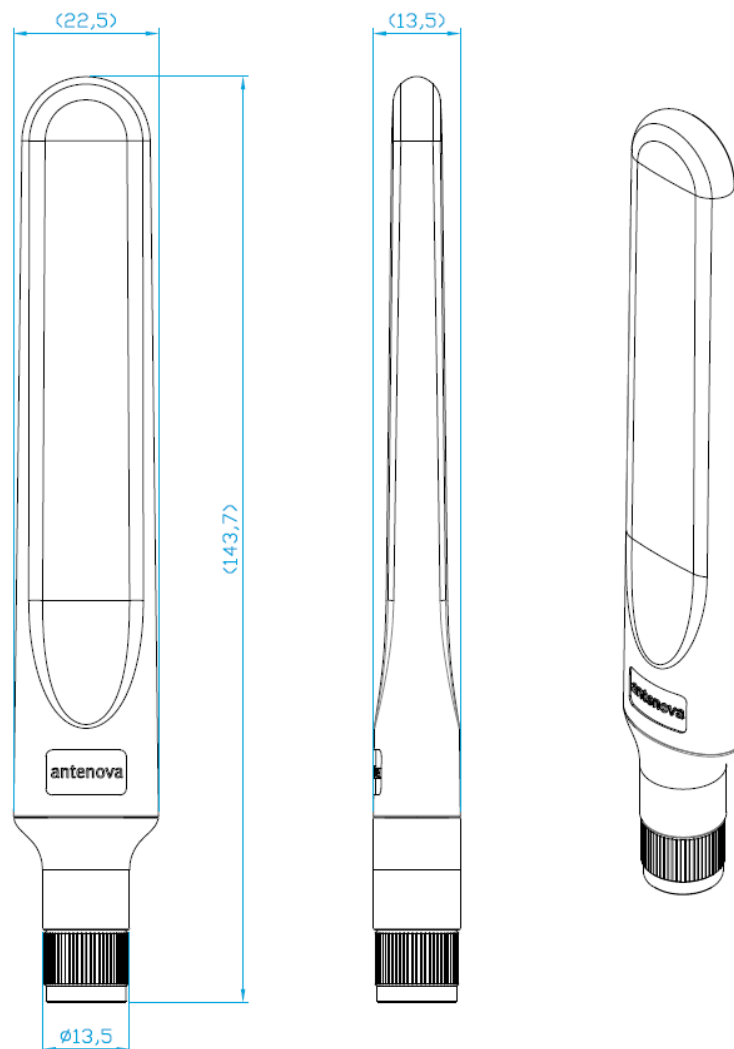


All dimensions in mm

8.1 Dimensions Hinged (SREL036-S9P)

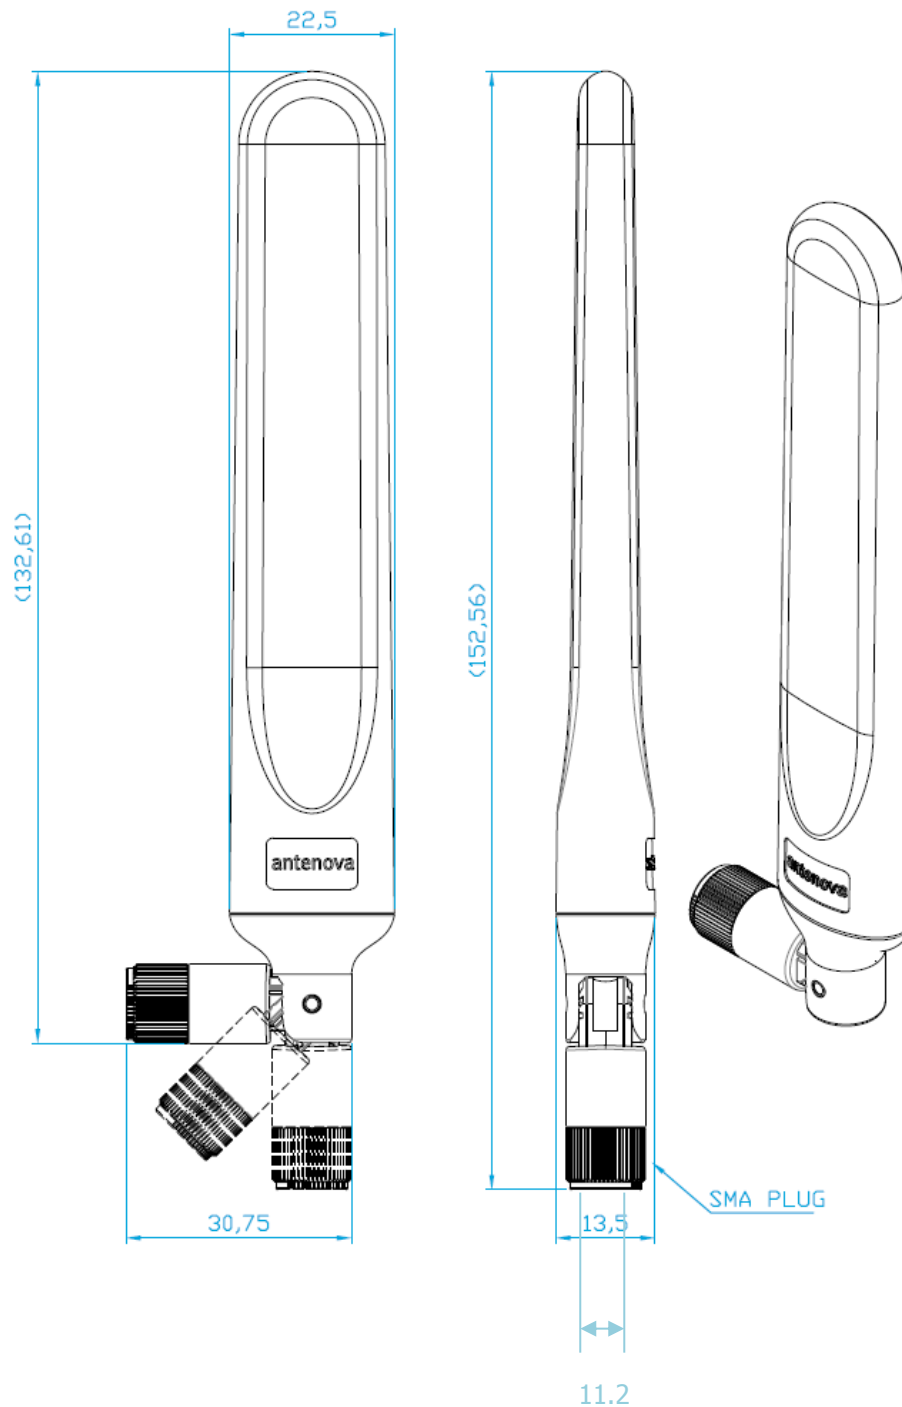

All dimensions in mm

8.1 Dimensions Fly lead (SREL036-10P)

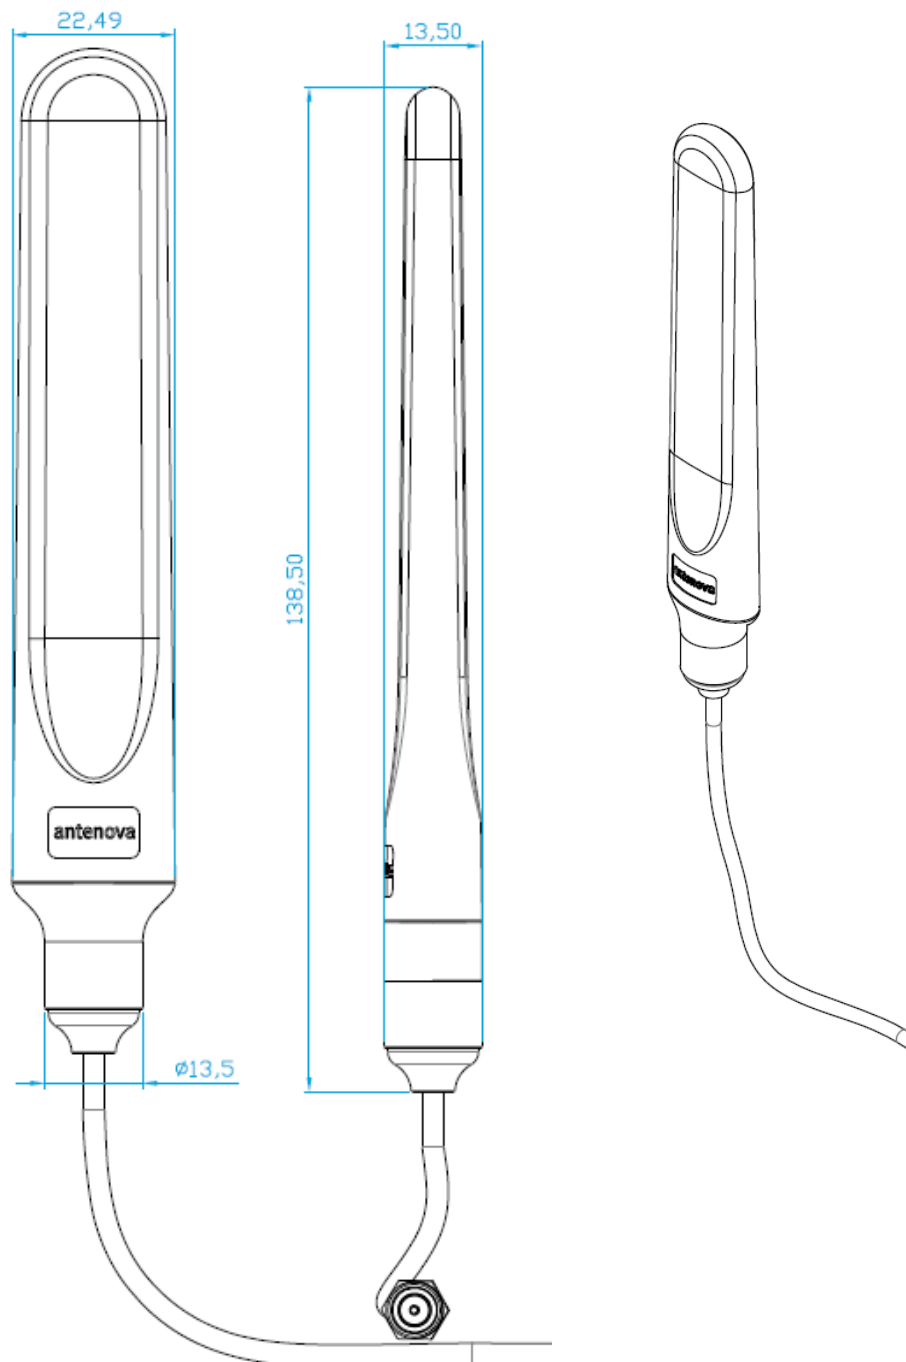

All dimensions in mm

Antennas for Wireless Applications

9. Electrical Interface

9.1 Transmission Line

All transmission lines should be designed to have a characteristic impedance of 50Ω.

- The length of the transmission lines should be kept to a minimum
- Any other parts of the RF system like transceivers, power amplifiers, etc, should also be designed to have an impedance of 50 Ω

Once the material for the PCB has been chosen, (PCB thickness and dielectric constant) a coplanar transmission line can easily be designed using any of the commercial software packages for transmission line design. For the chosen PCB thickness, copper thickness and substrate dielectric constant, the program will calculate the appropriate transmission line width and gaps on either side of the feed.


A DC blocking capacitor should be placed in line to protect the RF front end.

10. Hazardous Material Regulation Conformance

The antenna has been tested to conform to RoHS requirements. A certificate of conformance is available from Antenova's website.


11. Packaging

11.1 Fixed (SREL036-IPP)




The antennas are supplied in individual polythene bags. Twenty five small bags are packed in one larger bag. The outer box contains fifty antennas.

Box label

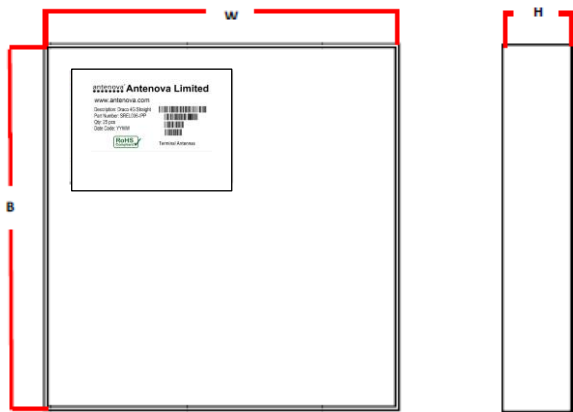


Width W	Breadth B	Thickness H
355 mm	340 mm	58 mm

11.2 Hinged (SREL036-S9P)

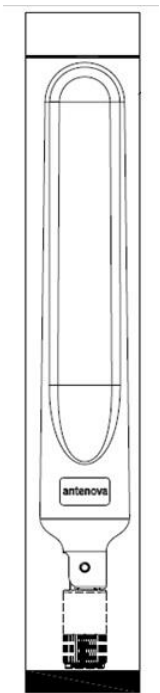


The antennas are supplied in individual polythene bags. Twenty five small bags are packed in one larger bag. The outer box contains fifty antennas.

Box label

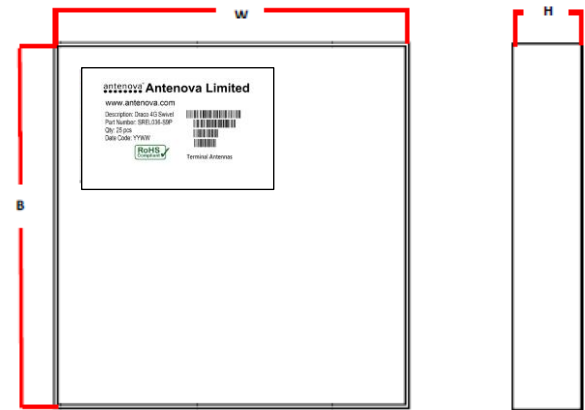


Width W	Breadth B	Thickness H
355 mm	340 mm	58 mm

11.3 Fly lead (SREL036-10P)

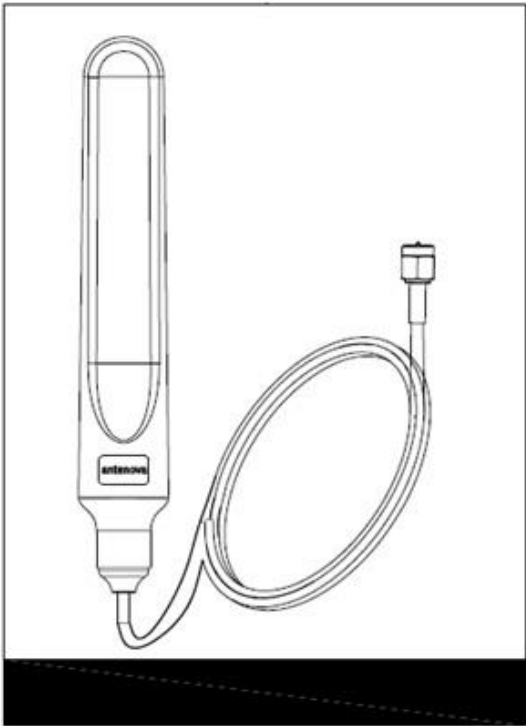

The antennas are supplied in individual polythene bags. Twenty five small bags are packed in one larger bag. The outer box contains fifty antennas.

Box label

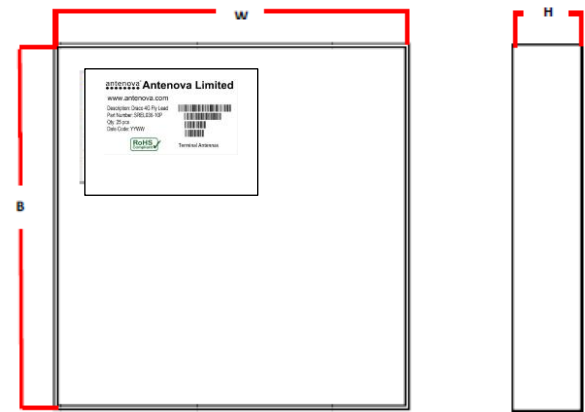

Width W	Breadth B	Thickness H
355 mm	340 mm	58 mm

12. Optimal Storage Conditions

Temperature	-10°C to 40°C
Humidity	Less than 75% RH
Shelf life	18 Months
Storage place	Away from corrosive gas and direct sunlight
Packaging	Antennas should be stored in unopened sealed manufacturer's plastic packaging.

13. Label Information

antenova® Antenova Limited
www.antenova.com
Description: Draco 4G Fly Lead
Part Number: SREL036-10P
Qty: 25 pcs
Date Code: YYWW



Terminal Antennas

antenova® Antenova Limited
www.antenova.com
Description: Draco 4G Fly Lead
Part Number: SREL036-15P
Qty: 25 pcs
Date Code: YYWW



Terminal Antennas

antenova® Antenova Limited
www.antenova.com
Description: Draco 4G Fly Lead
Part Number: SREL036-17P
Qty: 25 pcs
Date Code: YYWW



Terminal Antennas

antenova® Antenova Limited
www.antenova.com
Description: Draco 4G Straight
Part Number: SREL036-IPP
Qty: 25 pcs
Date Code: YYWW



Terminal Antennas

antenova® Antenova Limited
www.antenova.com
Description: Draco 4G Swivel
Part Number: SREL036-S9P
Qty: 25 pcs
Date Code: YYWW



Terminal Antennas

Quality statements

Antenova's products conform to REACH and RoHS legislation. For our statements regarding these and other quality standards, please see www.antenova.com.



Antenna design, integration and test resources

Product designers – the details contained in this datasheet will help you to complete your embedded antenna design. Please follow our technical advice carefully to obtain optimum antenna performance.

It is our goal that every customer will create a high performing wireless product using Antenova's antennas. You will find a wealth of design resources, calculators and case studies to aid your design at our website.

Antenova's design laboratories are equipped with the latest antenna design tools and test chambers. We provide antenna design, test and technical integration services to help you complete your design and obtain certifications.

If you cannot find the antenna you require in our product range, please contact us to discuss creating a bespoke antenna to meet your requirement exactly.

Contacts

Join our online antenna design community: ask.antenova.com

Order antenna samples and evaluation boards at: www.antenova.com

Request a quotation for antennas by volume: sales@antenova.com

Global Headquarters:

**Antenova Ltd, 2nd Floor Titan Court, 3 Bishop Square,
Hatfield, AL10 9NA +44 (0) 1223 810600**

Copyright® Antenova Ltd. All Rights Reserved. Antenova®, gigaNOVA®, RADIONOVA®, the Antenova product family names and the Antenova logos are trademarks and/or registered trademarks of Antenova Ltd. Any other names and/or trademarks belong to their respective companies. The materials provided herein are believed to be reliable and correct at the time of printing. Antenova does not warrant the accuracy or completeness of the information, text, graphics or other items contained within this information. Antenova further assumes no responsibility for the use of this information, and all such information shall be entirely at the user's risk.

Antennas for Wireless Applications