

SBT2080XCT~SBT2080XCB

EXTREME LOW VF SCHOTTKY RECTIFIER

Voltage

80 V

Current

20 A

Features

- Ultra low forward voltage, Low Power loss
- Surface mount package
- Ultra thin profile package for space constrained utilization
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case: Molded plastic, TO-220AB, ITO-220AB, TO-263
- Terminals: solder plated, solderable per MIL-STD-750, Method 2026
- TO-220AB Weight: 0.067 ounces, 1.89 grams.
- ITO-220AB Weight: 0.056 ounces, 1.6 grams
- TO-263 Weight: 0.049 ounces, 1.38 grams

TO-220AB



ITO-220AB



TO-263



Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER		SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage		V_{RRM}	80	V
Maximum rms voltage		V_{RMS}	56	V
Maximum dc blocking voltage		V_R	80	V
Maximum average forward rectified current	per device	$I_{F(AV)}$	20	A
	per diode		10	
Peak forward surge current : 8.3ms single half sine-wave Superimposed on rated load per diode		I_{FSM}	150	A
Typical junction capacitance ($V_R=4\text{V}$, $f=1\text{MHz}$)		C_J	580	pF
Typical thermal resistance per diode (Note 1)	TO-220AB	$R_{\theta JC}$	2	$^{\circ}\text{C/W}$
	TO-263		2	
	ITO-220AB		7	
Operating junction temperature range		T_J	-55 to +150	$^{\circ}\text{C}$
Storage temperature range		T_{STG}	-55 to +150	$^{\circ}\text{C}$

Electrical Characteristics

PARAMETER	SYMBOL	TEST CONDITION		TYP.	MAX.	UNIT
Forward voltage per diode	V_F	$I_F = 1\text{A}$	$T_J = 25^{\circ}\text{C}$	0.38	-	V
		$I_F = 3\text{A}$		0.45	-	
		$I_F = 10\text{A}$		-	0.63	
		$I_F = 1\text{A}$	$T_J = 125^{\circ}\text{C}$	0.27	-	V
		$I_F = 3\text{A}$		0.37	-	
		$V_R = 64\text{V}$	$T_J = 25^{\circ}\text{C}$	6	-	μA
Reverse current per diode (Note 2)	I_R	$V_R = 80\text{V}$	$T_J = 125^{\circ}\text{C}$	-	40	μA
				7	-	mA

Note : 1. Mounted on infinite heatsink.

2. Short duration pulse test used to minimize self-heating effect.

SBT2080XCT~SBT2080XCB

TYPICAL CHARACTERISTIC CURVES

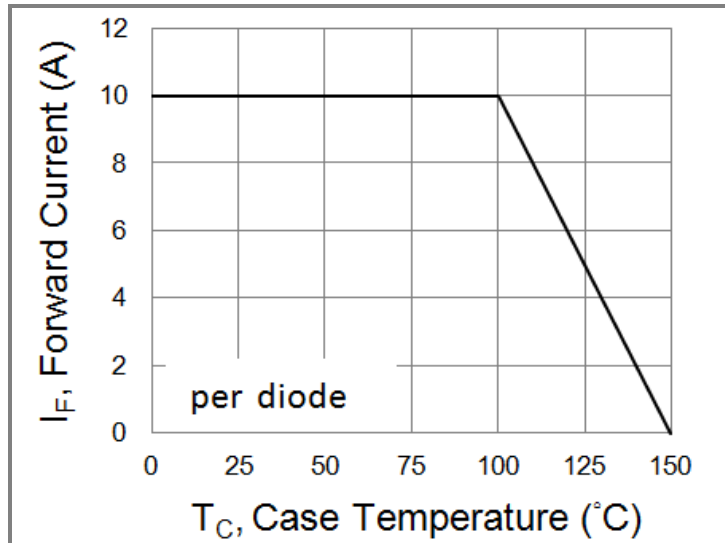


Fig.1 Forward Current Derating Curve

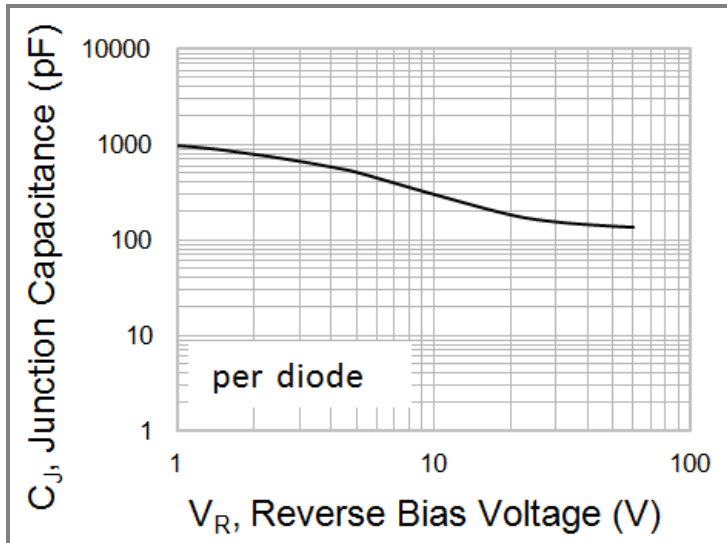


Fig. 2 Typical Junction Capacitance

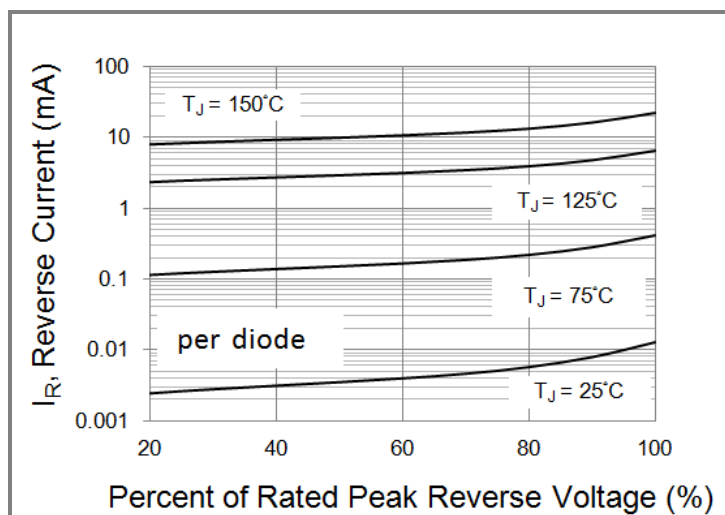


Fig.3 Typical Reverse Characteristics

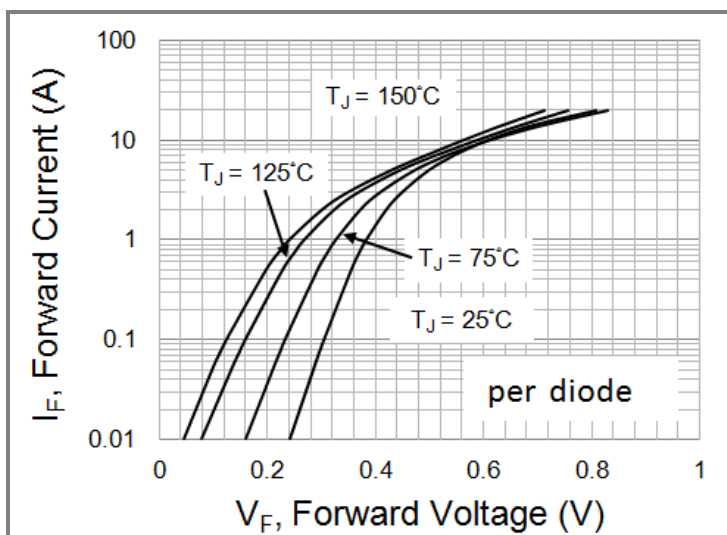


Fig.4 Typical Forward Characteristics


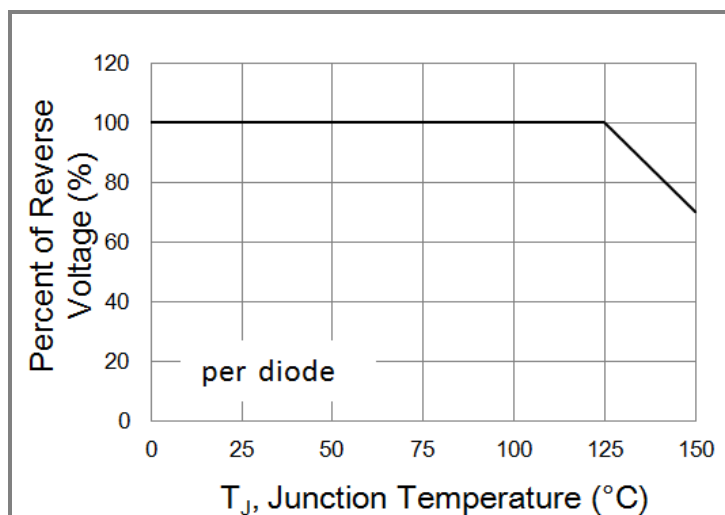


Fig.5 Operating Temperature Derating Curve

SBT2080XCT~SBT2080XCB


TO-220AB

Unit : inch(mm)

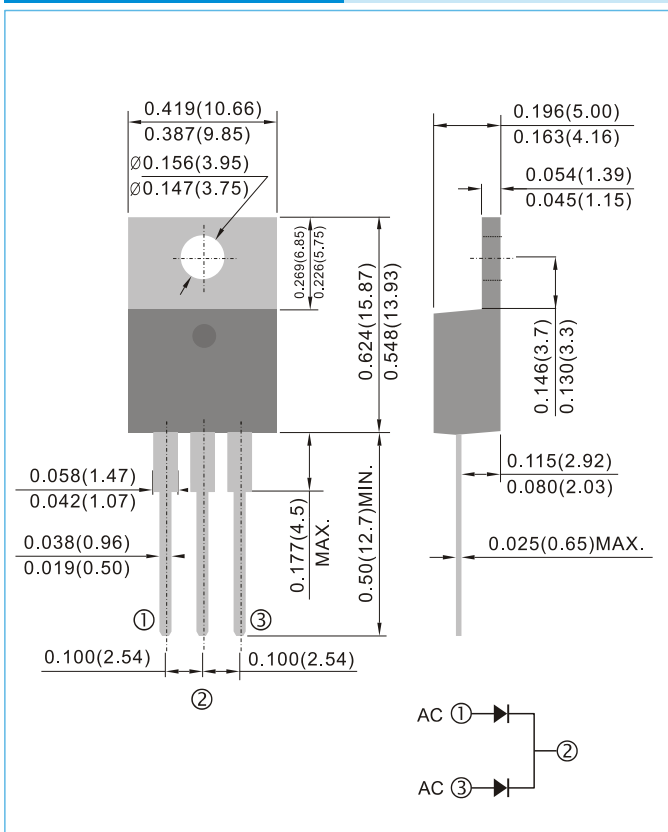


ITO-220AB

Unit : inch(mm)

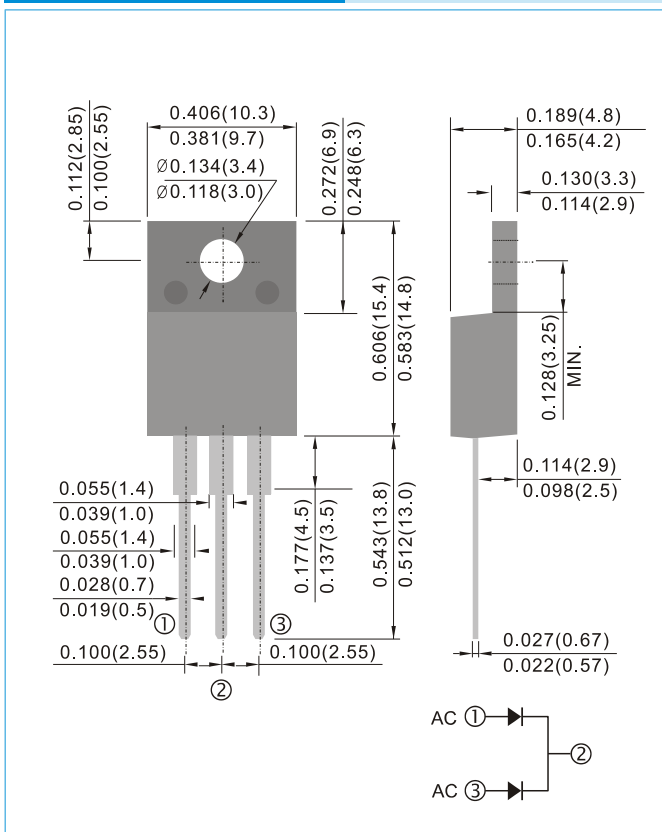

TO-263 / D²PAK

Unit : inch(mm)

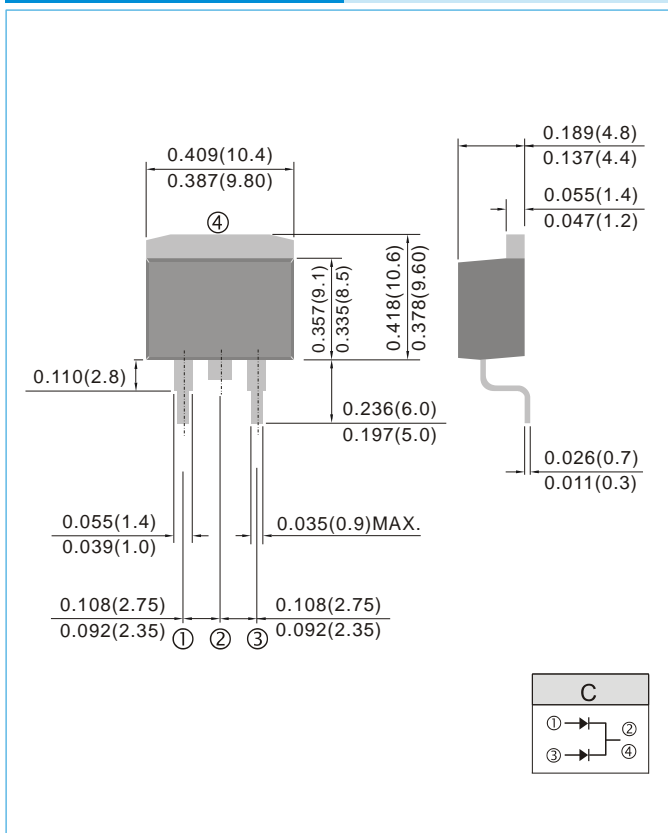



SBT2080XCT~SBT2080XCB

Part No Packing Code Version

Part No Packing Code	Package Type	Packing Type	Marking	Version
SBT2080XCT_T0_00001	TO-220AB	50pcs / Tube	SBT2080XCT	Halogen free
SBT2080XFCT_T0_00001	ITO-220AB	50pcs / Tube	SBT2080XFCT	Halogen free
SBT2080XCB_R2_00001	TO-263	800 pcs / 13" reel	SBT2080XCB	Halogen free

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panjit:

[SBT2080XCB_R2_00001](#)