



### Comet

Part No:

Black - MA585.A.001 White - MA585.W.001

### Description

2-in-1 GNSS and 5G/4G Permanent Mount Puck Antenna with 2m 1.5DS and SMA(M) Connectors

### Features:

Permanent Mount Puck Antenna 1\* 4G-5G Antenna 617 – 6000MHz 1\* GPS-GLONASS- Antenna IP67 Waterproof Enclosure Dims: 101 x 101 x 20 mm Cables: 2m of TGC-1.5DS Connectors: SMA(M)



<ul> <li>Installation Recommendation</li> <li>Packaging</li> <li>Antenna Characteristics</li> </ul>	2.	Specification	4
5. Packaging 10 5. Antenna Characteristics 11 7. Radiation Patterns 17	3.	Mechanical Drawing	7
<ul><li>Antenna Characteristics 11</li><li>Radiation Patterns 17</li></ul>	1.	Installation Recommendation	8
7. Radiation Patterns 17	5.	Packaging	10
	6.	Antenna Characteristics	11
Changelog 40	7.	Radiation Patterns	17
		Changelog	40

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.















# 1. Introduction



The Taoglas Comet MA585 is a low profile, puck style, screw mount antenna. The MA585 contains one 5G/4G high-performance antennas for use in MIMO cellular systems and one GNSS antenna. Through innovative antenna engineering techniques, it covers all worldwide cellular frequencies from 600MHz to 6GHz and GNSS Bands, BeiDou, GPS and GLONASS with stable gain and high efficiency, usually difficult to achieve in smaller style antennas.

A key differentiator of the Comet MA58x series is its ability to maintain strong performance when mounted directly on metallic enclosures. Competing antennas typically experience severe efficiency losses in the lower 5G/4G bands (617–960 MHz), but the Comet was designed specifically to overcome this challenge. Leveraging Taoglas' proprietary all-metal PIFA design and advanced bandwidth optimization techniques, the MA58x Series delivers consistently higher efficiency and more reliable radiation even when installed on metal housings with feed cables routed inside.

This robust design ensures dependable connectivity where other low-profile antennas fail, making the Comet series particularly well-suited for fleet and transport telematics, public safety, gateways, and other mission-critical applications that demand both a discreet form factor and reliable operation on metallic or equipment surfaces.

### **Typical Applications Include:**


- Telematics, Transport and Fleet Management
- Gateways and Routers
- Digital Signage and Point of Sale Terminals
- First Responder and Emergency Services

The Comet has been designed to be permanent mount/screw mount. This allows it to be utilized and installed in applications where a strong and secure mechanical attachment is required, ensuring reliable performance even in high-vibration or harsh environments. The GNSS and cellular MIMO connections utilize 2m of TGC-1.5DS coaxial cable with SMA(M) connectors as standard. Customized cable and connector versions are also available upon request. Contact your regional Taoglas customer support team for further information.



# 2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	•				
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	-				
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	•				
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	-	-	0	0	
L-Band	L-Band 1542 MHz				
	0				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	-				
IRNSS (Regional)	L5 1176.45 MHz				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	•		•		

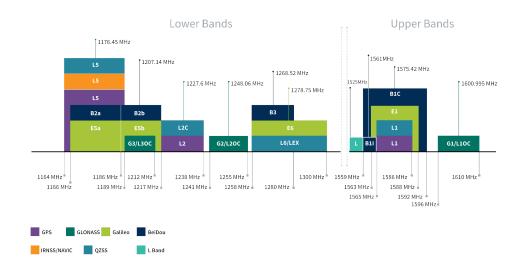

**GNSS Bands and Constellations** 



GNSS Electrical				
Frequency (MHz)	1561	1575.42	1602	
VSWR (max.)	1.5:1	1.5:1	2:1	
Passive Antenna Efficiency (%) (Without cable loss)	27.07	25.64	32.49	
Passive Antenna Gain at Zenith (dBic) (Without cable loss)	-3.15	-1.91	-2.69	
Axial Ratio (dB)	17.56	29.52	20.31	
Polarization		RHCP		
Impedance		50 Ω		
Cable		TGC-1.5DS		
Connector	SMA(M)			



				4G-5G Elec	trical				
Band	Frequency (MHz)	Measurement	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
<b>5GNR/4G</b> Band71	617-698	4G-5G Free Space	37.2	-4.29	2.73			Omni	
		4G-5G Ground Plane	41.2	-3.85	2.46				
<b>4G/3G</b> Band	698-824	4G-5G Free Space	44.2	-3.54	5.95	50 Ω	50 Ω Linear		
12,13,14,17,28,29	036-824	4G-5G Ground Plane	44.5	-3.52	2.17				
4G/3G/NB-IoT/Cat M Band	824-960	4G-5G Free Space	55.6	-2.55	6.57				
5,8,18,19,20,26,27		4G-5G Ground Plane	32.9	-4.83	2.92				10W
5GNR/4G	1427-1518	4G-5G Free Space	38.0	-4.20	7.07				
Band 21,32,74,75,76		4G-5G Ground Plane	58.7	-2.31	6.37				
<b>4G/3G</b> Band	1710-2200	4G-5G Free Space	57.4	-2.41	7.94	50 12	Lilleal	directional	1000
1,2,3,4,9,23,25,35,39, 66	1/10-2200	4G-5G Ground Plane	71.5	-1.46	7.79				
<b>4G/3G</b> Band 7,30,38,40,41	2300-2690	4G-5G Free Space	62.6	-2.04	8.18				
		4G-5G Ground Plane	44.1	-3.55	8.01				
LTE5200/Wi-Fi5800	5150-5925	4G-5G Free Space	39.1	-4.08	7.92				
		4G-5G Ground Plane	32.7	-4.85	6.96				
5GNR/4G	3300-5000	4G-5G Free Space	45.3	-3.44	7.16				
Band 22,42,48,77,78,79		4G-5G Ground Plane	43.8	-3.58	7.35				


Mechanical				
Dimensions	101 x 101 x 20mm			
Weight	185g			
Material	ASA			
Connector	SMA (M)			
Cable	2m of 1.5DS			
Thead Diameter	M12			


Environmental				
Waterproof Rating	IP67			
Operation Temperature	-40°C to 85°C			
Storage Temperature	-40°C to 85°C			
Relative Humidity	Non-condensing 65°C 95% RH			
RoHs & REACH Compliant	Yes			

6



# 3. Mechanical Drawing

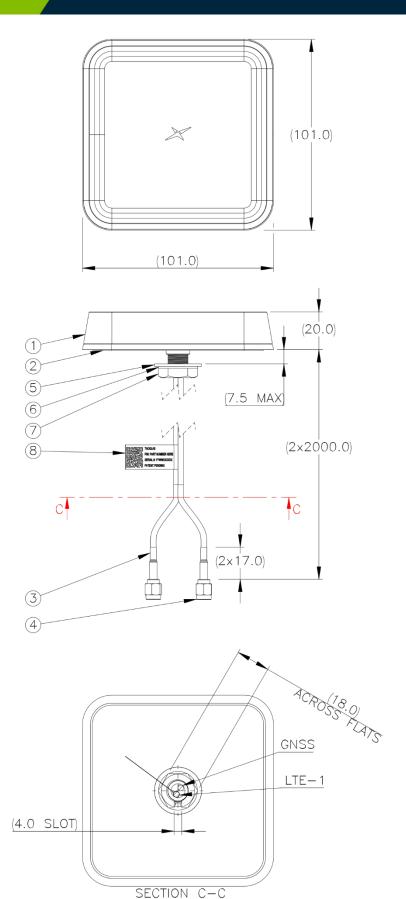

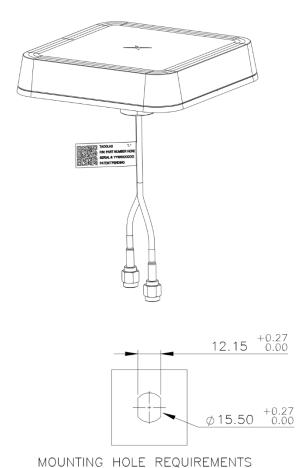





### 4. Installation Recommendation

# Installation Instructions Comet MA58x Series



Low Profile Permanent Mount Combination Antenna

### A Introduction

The **Taoglas Comet MA58x Series** is a low-profile, puck-style, screw-mount antenna that integrates two high-performance 5G/4G MIMO cellular elements and one GNSS element. Covering all worldwide cellular frequencies from 600 MHz to 6 GHz, along with GPS, GLONASS, and BeiDou bands, it achieves stable gain and efficiency that are typically difficult to realize in such a compact  $101 \times 101 \times 20$  mm form factor.





### **Electrical Safety**

The Comet can contains an active GPS/GNSS antenna. Rated voltage: 1.8-5.5VDC Rated current: 10mA maximum


The supply to this device must be provided with overcurrent protection of 1A maximum.

Power consumption @ 1.8-5.5V; 10 mA

### B) Mounting & Location

Secured via a ø12mm diameter threaded mounting stud, The Comet is recommended to be fitted by drilling a ø13mm hole will need to be drilled in the roof or enclosure surface.

When mounting on a vehicle roof panel ensure to mount on a flat surface, and measure for a central position. Care should be taken to mount the Comet antenna as far as possible from other roof-mounted features such as the aircon unit, light bar etc.






### ealing

In order to ensure that the installation is properly sealed against the mounting surface care must be taken regarding curvature of the mounting panel. It is highly recommended to install the antenna on a clean, flat and level surface. After installation the compression of the foam gasket and adhesive against the mounting panel should be checked and a small bead of neutral cure silicone sealant can be applied around the periphery of the enclosure if required.

### **C** Surface Preparation

When preparing to drill the hole, mask the area around the hole position to protect the surface. If an existing OEM antenna mounting hole is not present, drill a pilot hole and increase the hole size to Ø12mm (0.472"). Ensure the drill bit does not contact the headliner. Then deburr and clean the area around the hole carefully removing all waste.




Remove paint and primer from under panel surface to ensure adequate earth contact by washer and nut. Apply petroleum jelly or paint around cut edge of the hole to prevent corrosion

www.taoglas.com




### **D** Adhesive Foam Gasket

On the underside of the antenna there is a 3M adhesive foam gasket. Peel away the 3M adhesive protection and feed the cables through the hole. Position the antenna over the hole and press down onto the panel with pressure. This adhesion will ensure the antenna is securely mounted and will also allow for extremely minimal curvature on the roof of a vehicle.



### E ) Securing the Mount

A split nut is used to easily fit onto the thread through the cables. The nut is attached from the underside of the panel, it should easily twist onto the thread and then secured in place with a final tighten with a spanner. After tightening, double check the antenna to make sure that it is properly secured.



### F Cable Routing and Connection

The cables supplied are RG-174 and TGC-1.5DS for all feeds. The heatshrink will denote which cable is which for ease of installation. Connect each individual connector to the correct port of the router, if any cable is unused please fit a  $50\Omega$  terminator to the individual connection.



### G Notices



### Caution

To comply with FCC RF Exposure requirements in section 1.1310 of the FCC Rules, antennas used with this device must be installed to provide a separation distance of at least 20 cm from all persons to satisfy RF exposure compliance.



### Warning

**Do not** operate the equipment in an explosive atmosphere.



### European Waste Electronic Equipment Directive 2012/19/EU

Please ensure that your old Waste Electricals and Electronics are recycled do not throw them away into standard waste.



Hazardous Substances Directive (RoHS) 2011/65/EU / 2015/863/EU Directive 2014/53/EU Radio Equipment Directive (RED)

### View CE Certificate online:

www.taoglas.com/assets/ce/CE-Declaration-of-Conformity-RoHS-RED-Patriot-Series.pdf

### Harmonised Standards and References:

EN 301 489-1 (V2.2.3): ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements. Referencing CENELEC EN 55032 Class B.

Waiver: This document represents information compiled by Taoglas to the best of our current knowledge. This is not intended to be used as a representation or warranty of fitness of the products described for any particular purpose. This document details guidelines for general information purposes only. When planning installations, always seek specialist advice and ensure that the products are always installed by a properly qualified installer in accordance with applicable regional laws and regulations.

 $All\ copyrights, trademarks\ and\ any\ other\ intellectual\ property\ rights\ related\ are\ owned\ by\ Taoglas\ Group\ Holdings\ Limited.$ 

www.taoglas.com



# 5. Packaging



☑ 1 PCS / PE bag

☑ PE bag(mm): 200x130 (Ref)

☑ Weight (g): 185 ±3%

☑ SPQ Label



☑ Carton(mm): 370x370x300


☑ Weight (Kg): 10.15 ±3%


✓ Carton Label




# 6. Antenna Characteristics

# 6.1 Test Setup

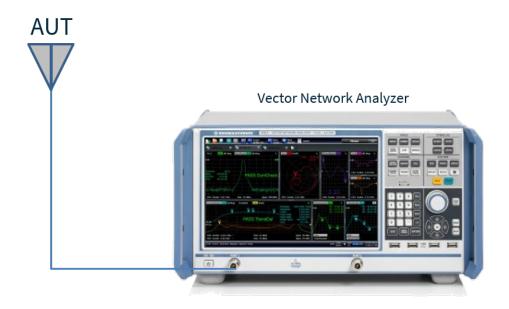









Set-up in Free Space



### 6.2 GNSS - Return Loss

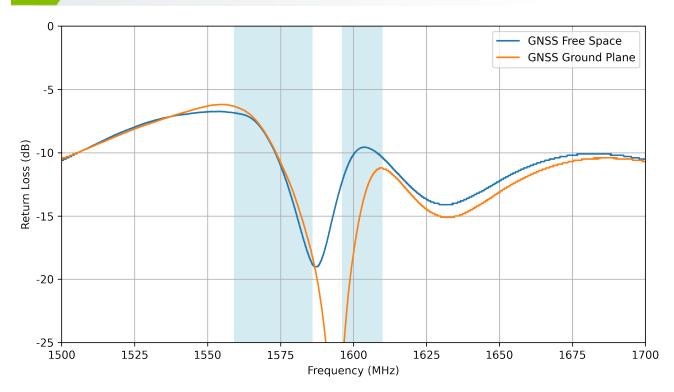


# 6.3 GNSS - VSWR

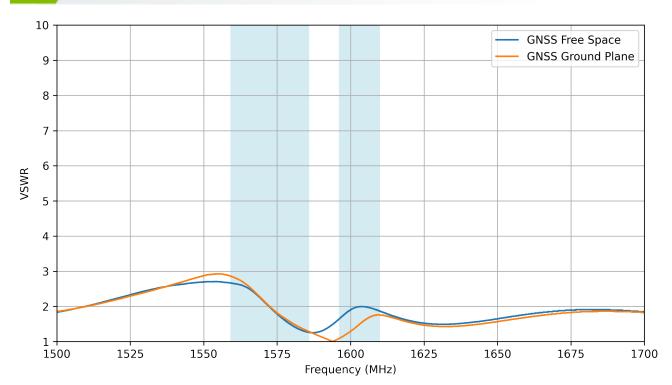




# 6.4 GNSS - Efficiency

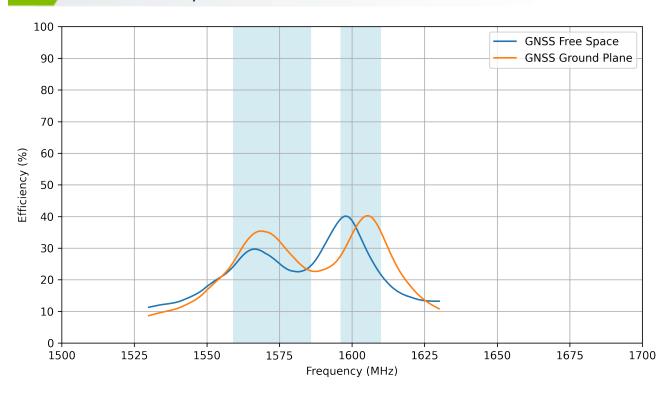


### 6.5 GNSS - Average Gain

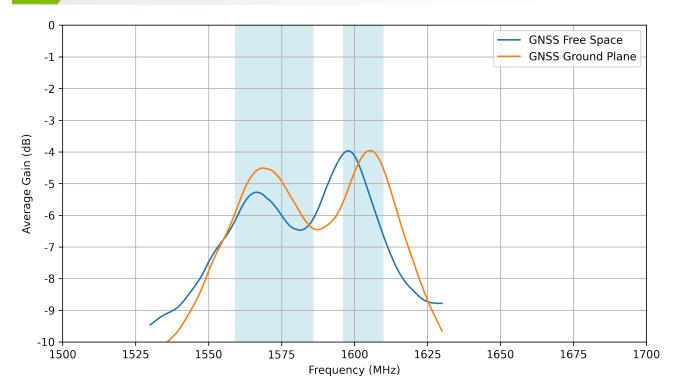




### 6.6 GNSS - Peak Gain

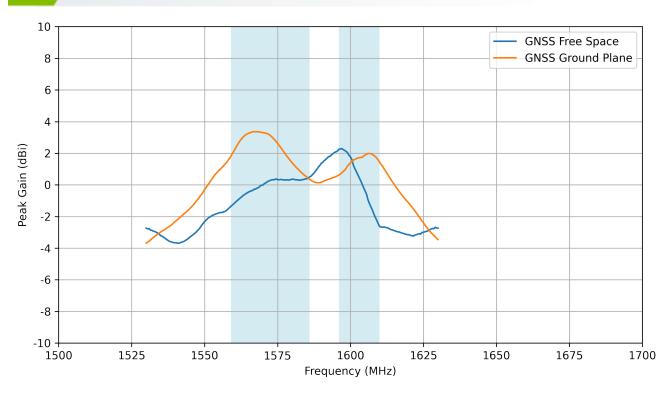


### 6.7 4G-5G - Return Loss

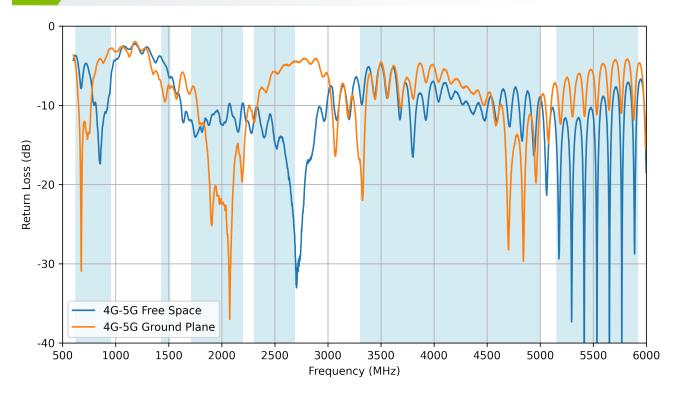




### 6.8 4G-5G - VSWR

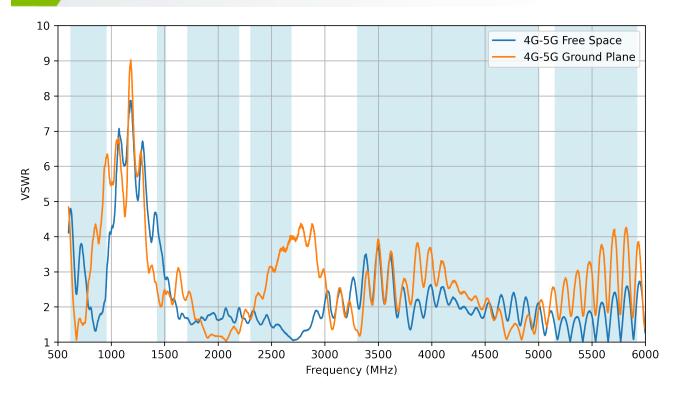


### 6.9 4G-5G - Efficiency

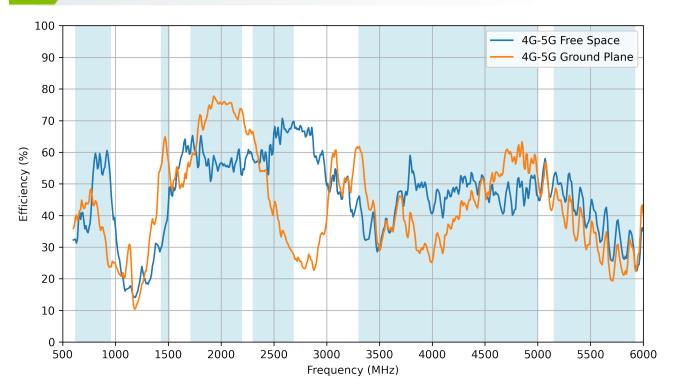




### 6.10 4G-5G - Average Gain

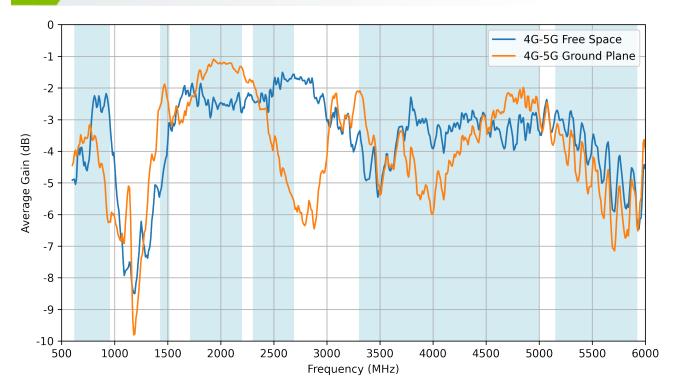


### 4G-5G - Peak Gain 6.11

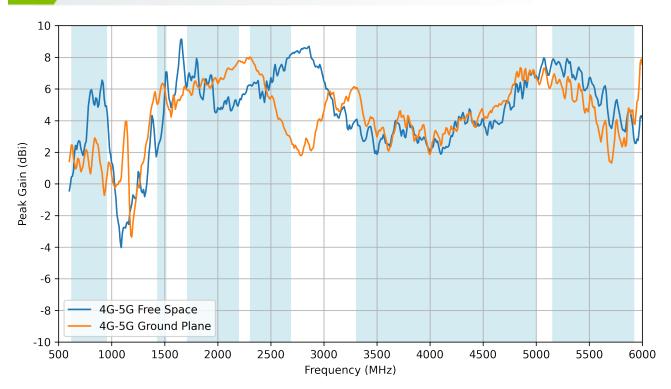




# 7. Radiation Patterns

# 7.1 Test Setup

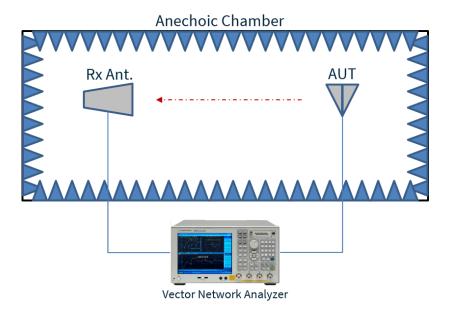









Set-up in Free Space




# 7.2 GNSS Free Space Patterns at 1561 MHz

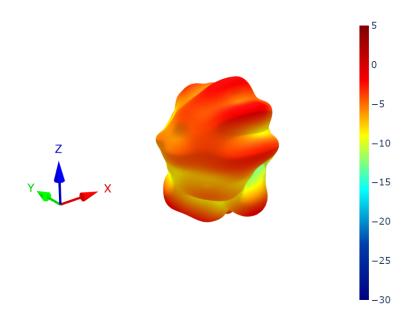


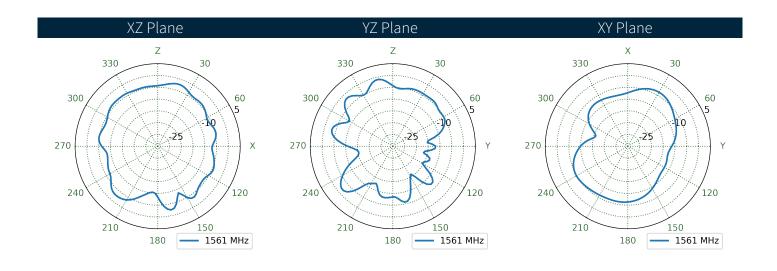




### .3 GNSS Ground Plane Patterns at 1561 MHz

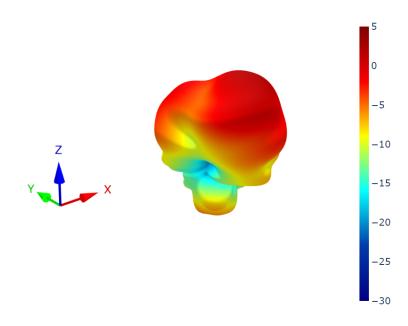


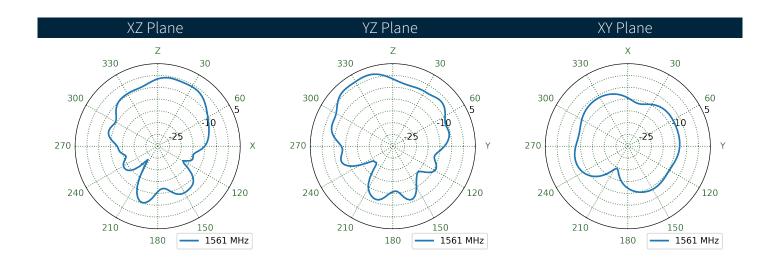




# .4 GNSS Free Space Patterns at 1576 MHz

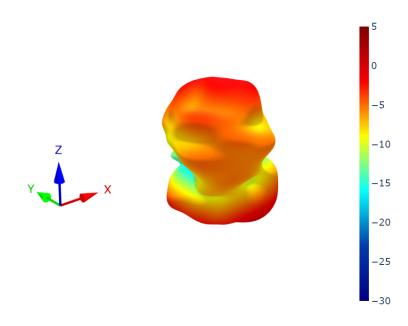


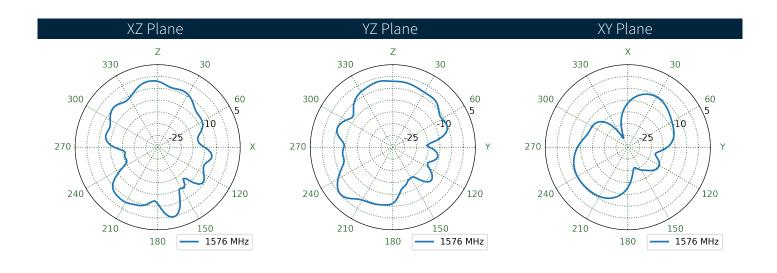




### GNSS Ground Plane Patterns at 1576 MHz

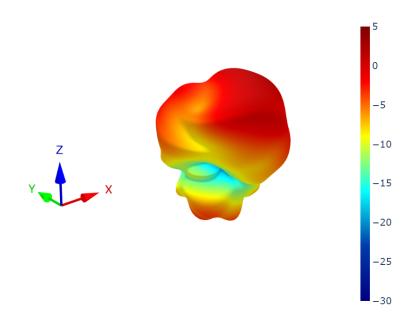


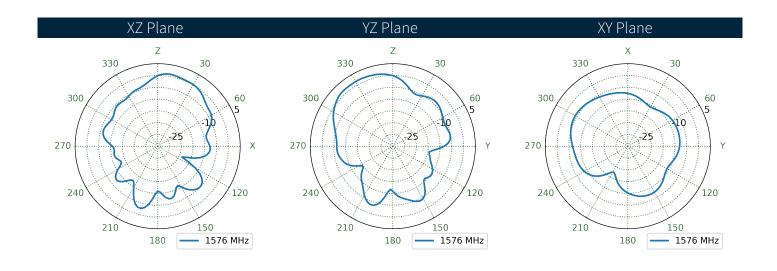




# GNSS Free Space Patterns at 1602 MHz

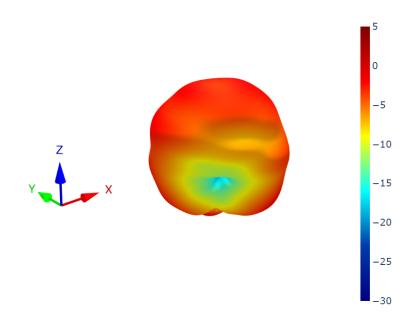


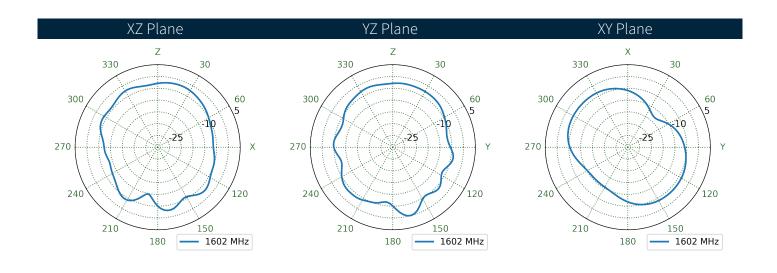




### 7 GNSS Ground Plane Patterns at 1602 MHz

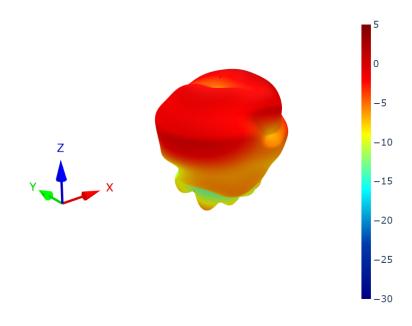


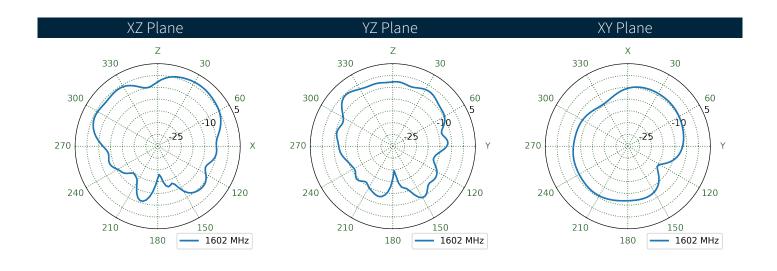




# 4G-5G Free Space Patterns at 650 MHz

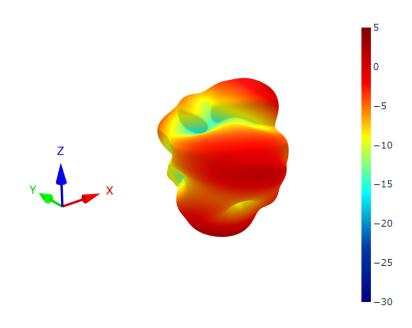


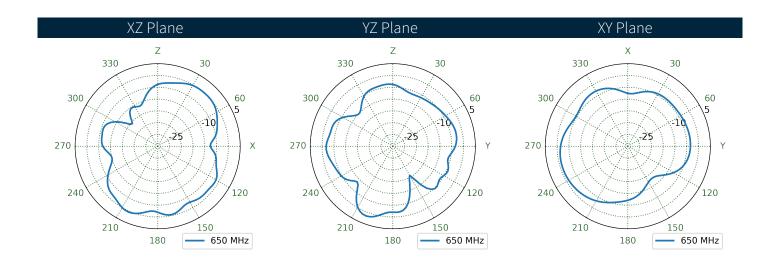




### 9 4G-5G Ground Plane Patterns at 650 MHz

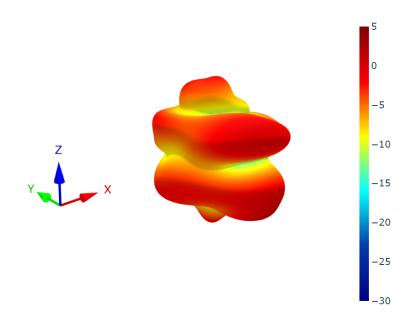


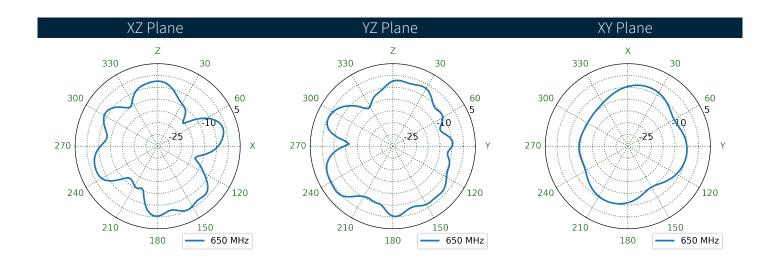




# 7.10 4G-5G Free Space Patterns at 760 MHz

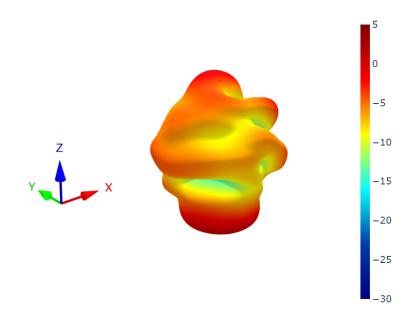


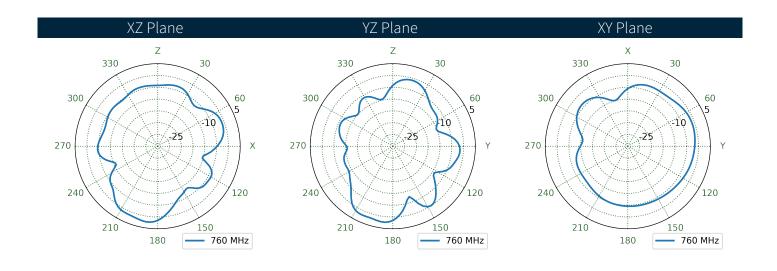




### 7.11 4G-5G Ground Plane Patterns at 760 MHz

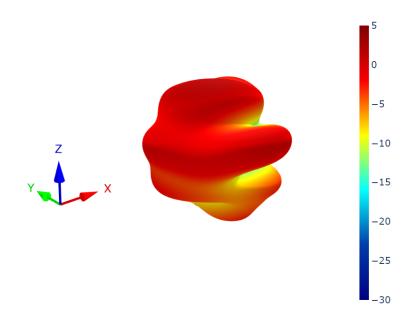


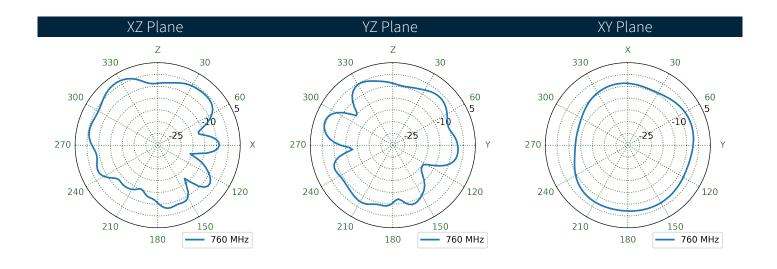




# 7.12 4G-5G Free Space Patterns at 890 MHz

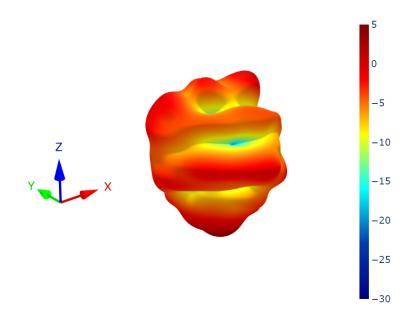


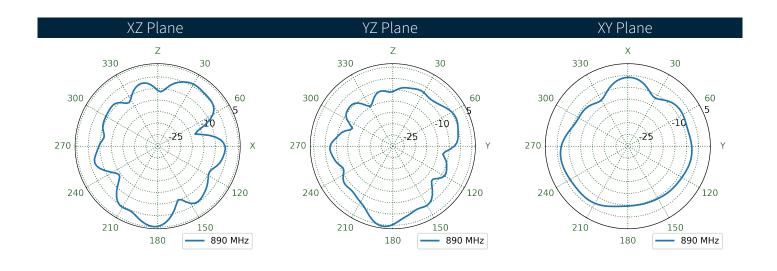




### 7.13 4G-5G Ground Plane Patterns at 890 MHz

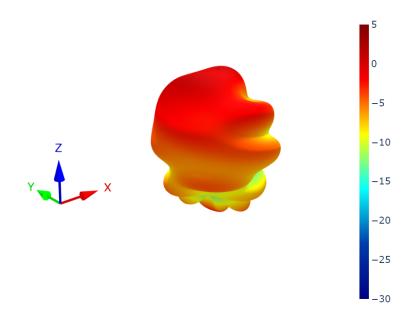


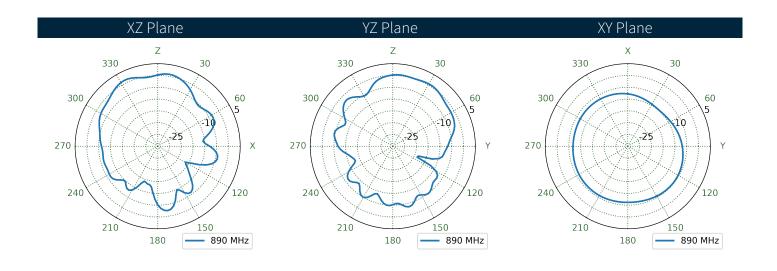




# 7.14 4G-5G Free Space Patterns at 1470 MHz

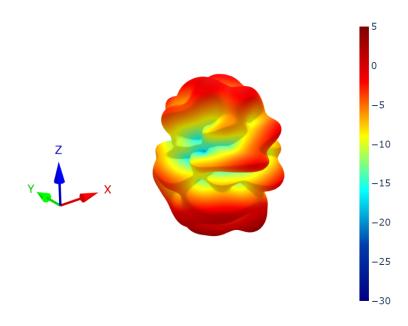


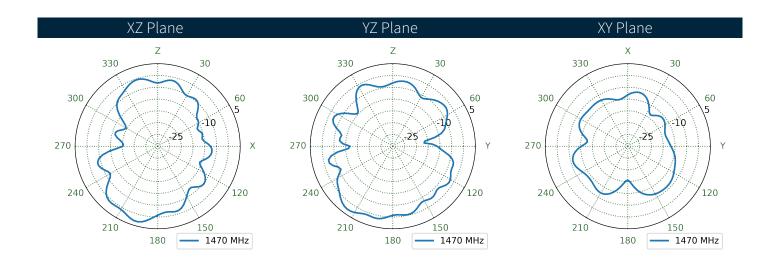




### 7.15 4G-5G Ground Plane Patterns at 1470 MHz

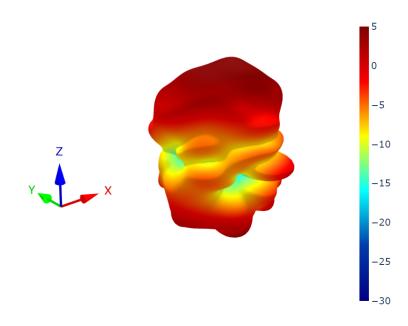


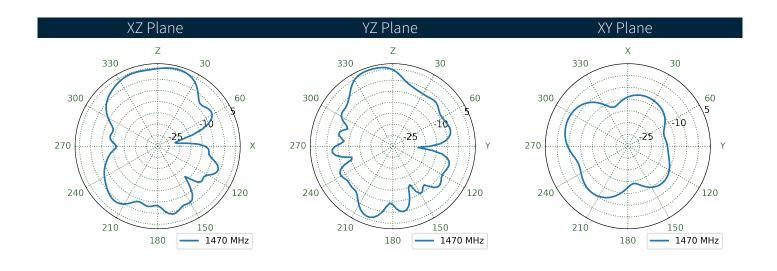




# 7.16 4G-5G Free Space Patterns at 1950 MHz

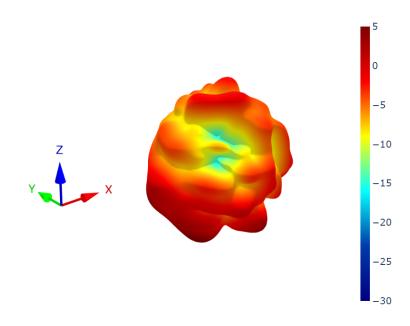


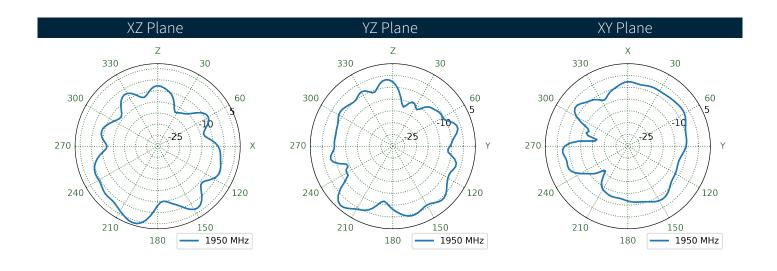




### 7.17 4G-5G Ground Plane Patterns at 1950 MHz

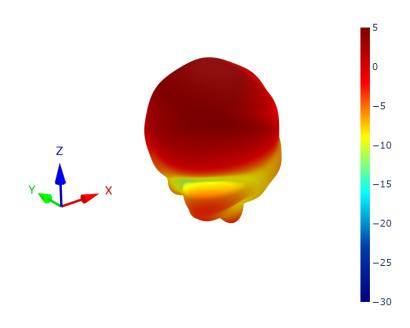


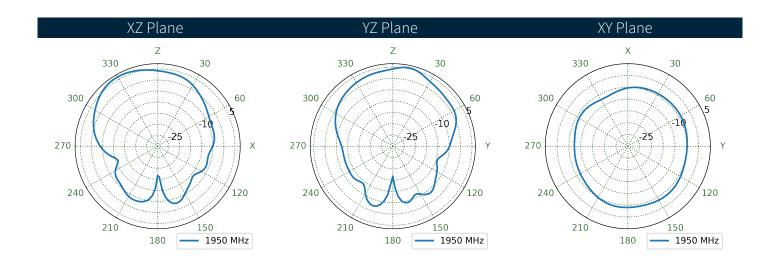




# 7.18 4G-5G Free Space Patterns at 2490 MHz

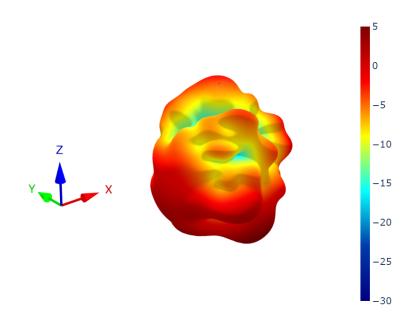


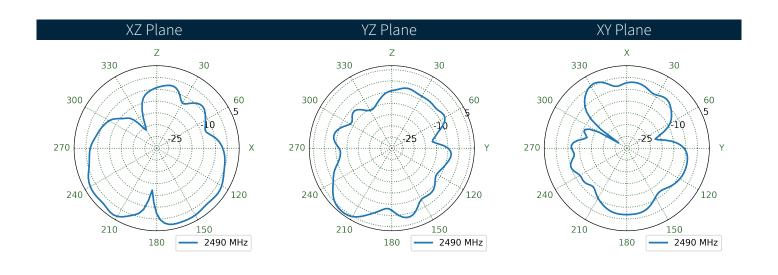




### 7.19 4G-5G Ground Plane Patterns at 2490 MHz

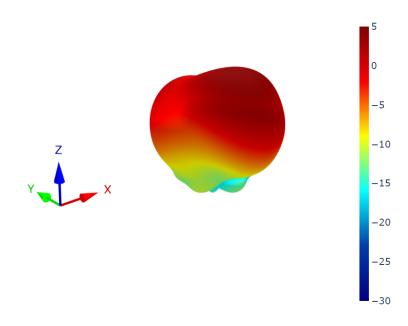


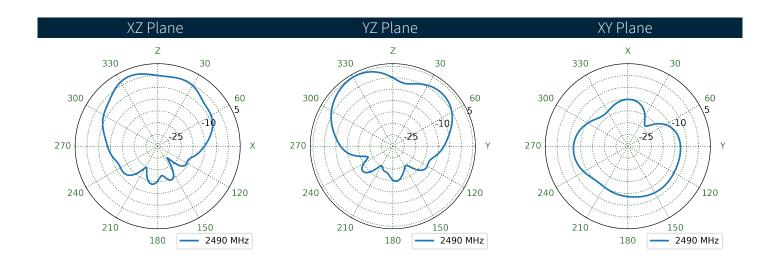




# 7.20 4G-5G Free Space Patterns at 4150 MHz

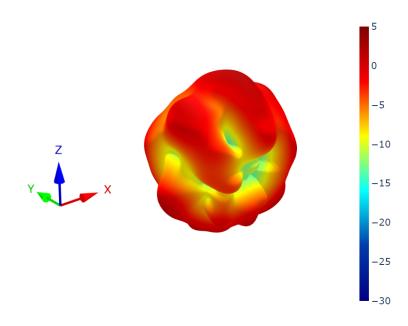


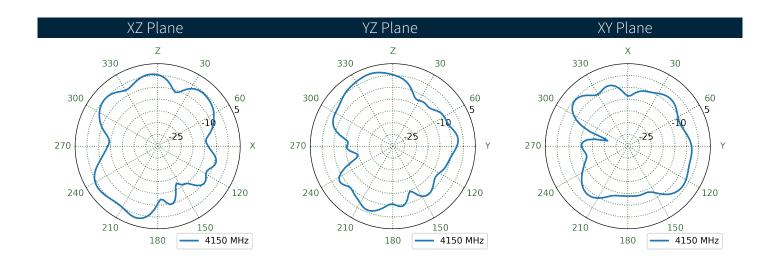




### 7.21 4G-5G Ground Plane Patterns at 4150 MHz

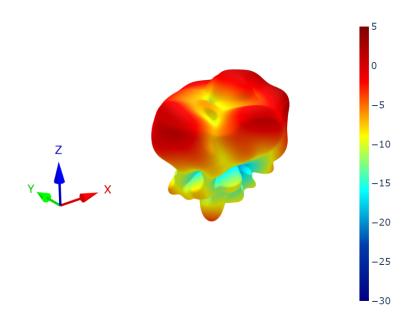


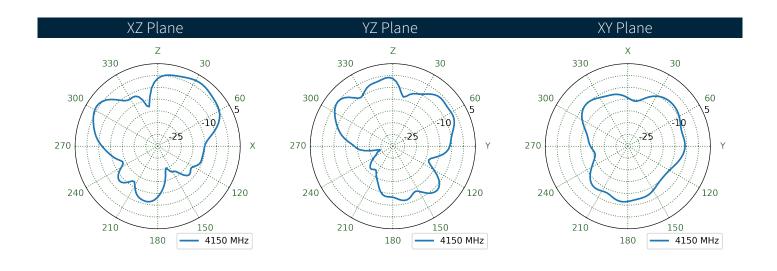




# 7.22 4G-5G Free Space Patterns at 5550 MHz

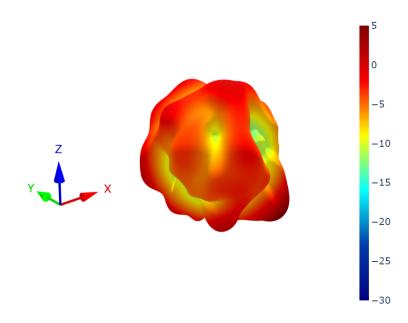


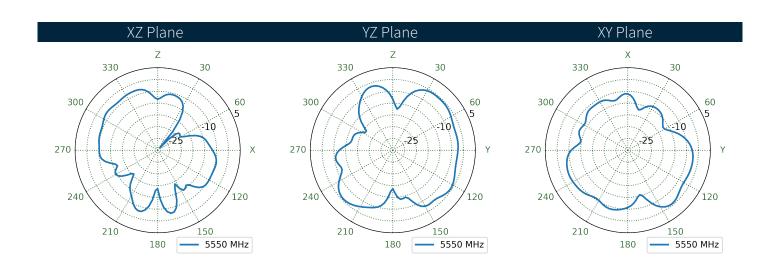



### 7.23 4G-5G Ground Plane Patterns at 5550 MHz

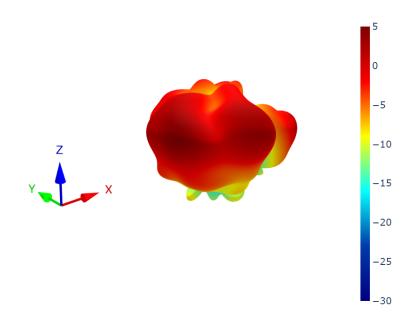

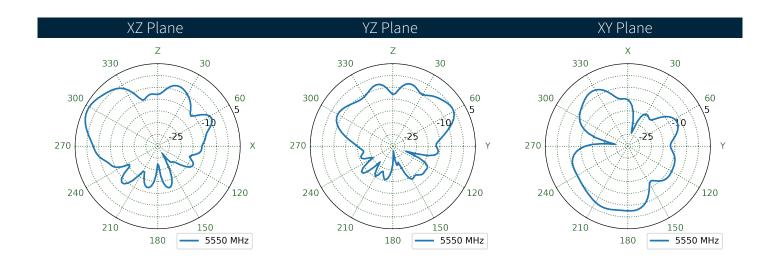



# Changelog for the datasheet SPE-25-8-190 – MA585.A.001\_ MA585.W.001 Revision: A (Initial Release) Date: 2025-07-09 Notes: Initial Datasheet Release Author: Gary West

Previous Revisions	





www.taoglas.com

