




# UMA-series

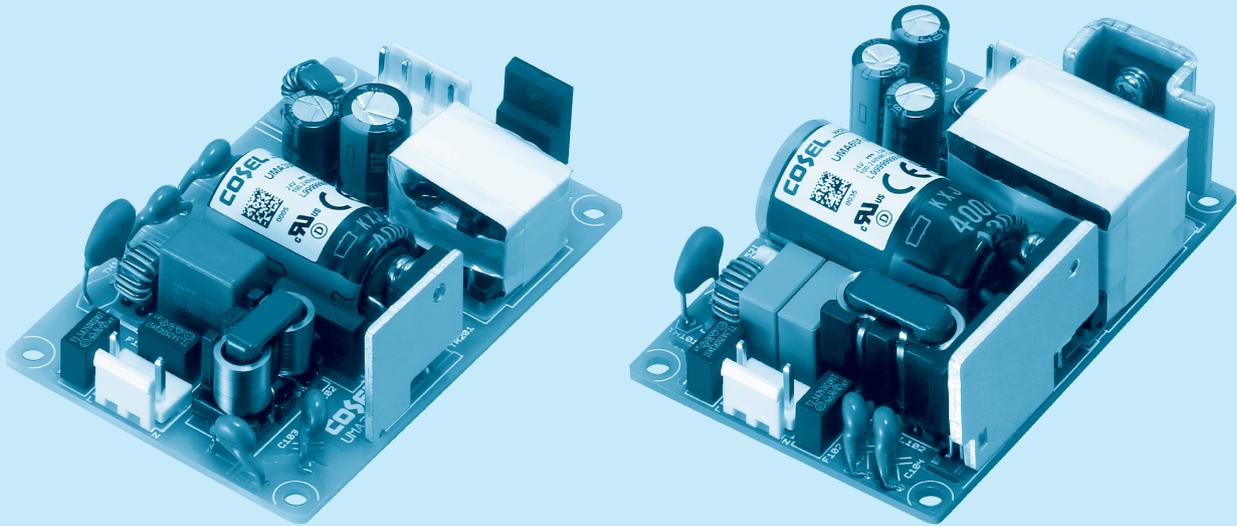

## Feature

For medical electric equipment  
 Medical Isolation Grade 2MOPP  
 4kV isolation  
 Suitable for BF application  
 Low leakage current  
 2"× 3" standard footprint  
 Economical design

## Safety agency approvals

ANSI/AAMI ES60601-1, EN60601-1 3rd,  
 C-UL (CAN/CSA-C22.2 No.60601-1),  
 UL62368-1, EN62368-1,  
 C-UL (CAN/CSA-C22.2 No.62368-1),  
 Complies with EN60335

## CE marking

Low Voltage Directive  
 RoHS Directive

## UKCA marking

Electrical Equipment Safety Regulations  
 RoHS Regulations

## 5-year warranty (See Instruction Manual)

## EMI

Complies with CISPR11 classB, CISPR32 classB, EN55011-B,  
 EN55032-B, FCC Part15 classB and FCC Part18 classB

## EMS Compliance : EN61204-3, EN61000-6-2 IEC60601-1-2 (2014), EN60601-1-2 (2015)

EN61000-4-2  
 EN61000-4-3  
 EN61000-4-4  
 EN61000-4-5  
 EN61000-4-6  
 EN61000-4-8  
 EN61000-4-11

# UMA30F

① **UM** ② **A** ③ **30** ④ **F** ⑤ **-□** ⑥ **-□**



- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional \*5  
E : IEC Class II  
T : Terminal block  
Y : with Potentiometer

\*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	UMA30F-5	UMA30F-12	UMA30F-24	UMA30F-48
MAX OUTPUT WATTAGE[W]	15	30	31.2	31.2
DC OUTPUT	5V 3A	12V 2.5A	24V 1.3A	48V 0.65A

## SPECIFICATIONS

	MODEL	UMA30F-5	UMA30F-12	UMA30F-24	UMA30F-48	
INPUT	VOLTAGE[V]	AC85 - 264 1φ				
	CURRENT[A]	ACIN 115V	0.35	0.7		
		ACIN 230V	0.15	0.3		
	FREQUENCY[Hz]	50/60 (47-63)				
	EFFICIENCY[%]	ACIN 115V	81typ	86typ	88typ	88typ
		ACIN 230V	80typ	87typ	89typ	89typ
	INRUSH CURRENT[A]	ACIN 115V	25typ			
		ACIN 230V	50typ			
LEAKAGE CURRENT[μA]	ACIN 264V	200max				
TOUCH CURRENT[μA]	ACIN 264V	75max				
OUTPUT	VOLTAGE[V]	5	12	24	48	
	CURRENT[A]	3	2.5	1.3	0.65	
	WATTAGE[W]	15	30	31.2	31.2	
	LINE REGULATION[mV] *1	20max	48max	96max	192max	
	LOAD REGULATION[mV] *1	100max	120max	150max	240max	
	RIPPLE NOISE [mVp-p] *2 Io=100%	150 (Bandwidth 20MHz)				
	TEMPERATURE REGULATION[mV] 0~+50°C	100max	120max	240max	480max	
	START-UP TIME[ms]	ACIN 115V	40typ			
		ACIN 230V	40typ			
	HOLD-UP TIME[ms]	ACIN 115V	20typ			
ACIN 230V		100typ				
OUTPUT VOLTAGE SETTING[V]	4.90 to 5.30	11.50 to 12.50	23.00 to 25.00	46.00 to 50.00		
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION [A]	Works over 105% of rating and recovers automatically				
	OVERVOLTAGE PROTECTION[V]	5.75 to 7.00	13.80 to 16.80	27.60 to 33.60	55.20 to 67.20	
ISOLATION	INPUT-OUTPUT	AC4,000V 1minute, DC500V 100MΩ min (At Room Temperature) 2MOPP				
	INPUT-FG	AC2,000V 1minute, DC500V 100MΩ min (At Room Temperature) 1MOPP				
	OUTPUT-FG	AC2,000V 1minute, DC500V 100MΩ min (At Room Temperature) 1MOPP				
ENVIRONMENT	OPERATING TEMP., HUMID.*3	-20 to +70°C, 20 - 90%RH (Non condensing)				
	STORAGE TEMP., HUMID.	-20 to +75°C, 20 - 90%RH (Non condensing)				
	VIBRATION	10 - 55Hz, 19.6m/s <sup>2</sup> (2G) , 3minutes period, 60minutes each along X, Y and Z axis				
	IMPACT	196.1m/s <sup>2</sup> (20G) , 11ms, once each X, Y and Z axis				
SAFETY AND EMC	AGENCY APPROVALS	ANSI/AAMI ES60601-1, EN60601-1 3rd, C-UL (equivalent to CAN/CSA-C22.2 No.60601-1) , UL62368-1, EN62368-1, C-UL (equivalent to CAN/CSA-C22.2 No.62368-1) , Complies with EN60335-1				
	EMC EMISSION	Complies with CISPR11 classB, CISPR32 classB, EN55011-B, EN55032-B, FCC Part15 classB and FCC Part18 classB				
	EMC IMMUNITY	Complies with EN61000-4-2, 3, 4, 5, 6, 8, 11				
	HARMONIC ATTENUATOR*6	Complies with IEC61000-3-2 (Class A) No built-in active PFC				
OTHERS	CASE SIZE/WEIGHT *7	50.8×21.7×76.2mm [2.0×0.85×3.0 inches] (W×H×D) / 80g max				
	COOLING METHOD	Convection				
WARRANTY	WARRANTY *4	5 years (subject to the operating conditions)				

\*1 Consult us about dynamic load and input response. Measure the output voltage by using the average mode of the tester to deal with the burst operation at low (Io=0~20%Atyp) load.

\*2 This is the result of measurement of the testing board with capacitors of 47μF and 0.1μF placed at 150 mm from the output terminals by a 20MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-GikenRM104. When the load factor is low (Io=0~20%Atyp), the switching power loss is reduced by burst operation, which will cause ripple noise to go beyond the specifications.

\*3 Output power derating is required. Refer to "Derating"

\*4 Consult us about details.

\*5 The listed options may affect the published standard specifications. Please contact us for detailed product specifications and safety approvals.

\*6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

\*7 Dimensions below PCB are not included.


\* All parameters not specially mentioned are measured at ACIN 230V, rated load and 25°C of ambient temperature.

\* Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.

\* Parallel operation is not possible with this model.

\* Acoustic noise may be heard from the power supply when used for pulse load.

External view

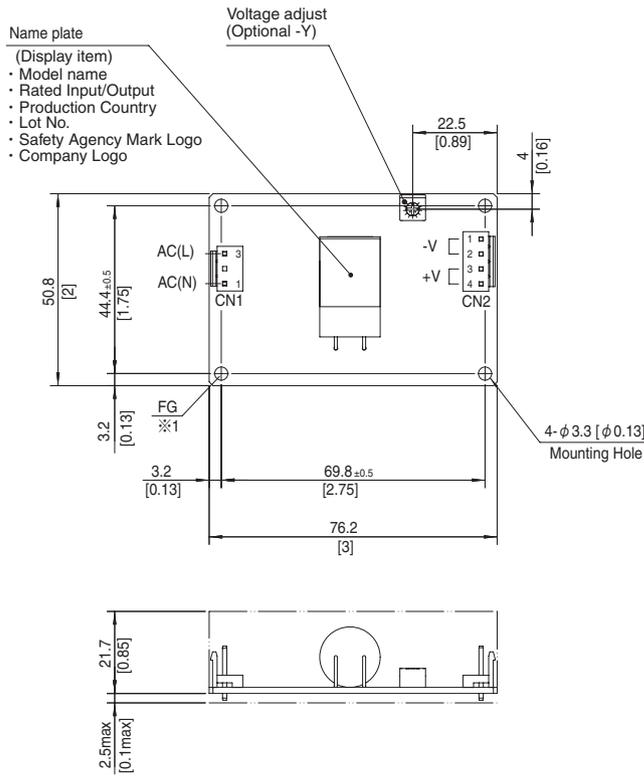

Mating connector and terminal of CN1, CN2


I/O Connector	Mating Connector	Terminal	Mfr.
CN1	B2P3-VH	Reel : SVH-21T-P1.1 Loose piece : BVH-21T-P1.1	J.S.T.
CN2	B4P-VH	Chain : SVH-21T-P1.1 Loose piece : BVH-21T-P1.1	J.S.T.

<Pin Assignments>

CN1		CN2	
Pin No.	Input	Pin No.	Output
1	AC(N)	1, 2	-V
2		3, 4	+V
3	AC(L)		

- ※ Dimensions in mm, [ ] =inches
- ※ Tolerance : ±1 [±0.04]
- ※ Weight : 80g max
- ※ PCB Material/thickness : CEM-3/1.6 [0.06]
- ※1 The mounting hole is for FG connection.  
The mounting hole in the -E option is not for FG connection.

Derating Curve

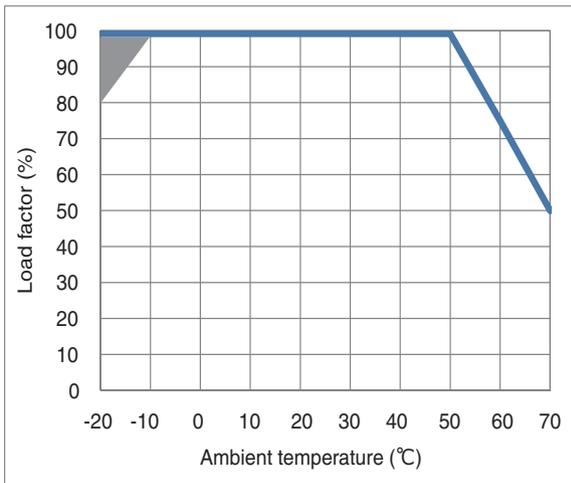

\*The shaded area is the derating required at start-up.

Fig.1 Derating curve depending on ambient temperature


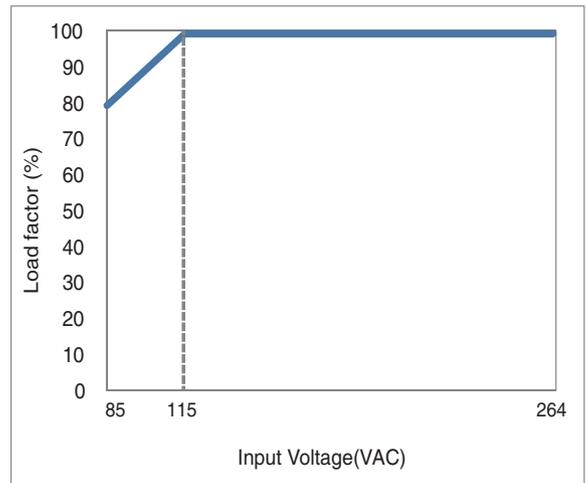


Fig.2 Derating curve depending on input voltage

■ The ambient temperature should be measured 5 to 10 cm away from the power supply so that it won't be influenced by the heat from the power supply. Please consult us for more details.

# UMA60F

① **UM** ② **A** ③ **60** ④ **F** ⑤ **-□** ⑥ **-□**

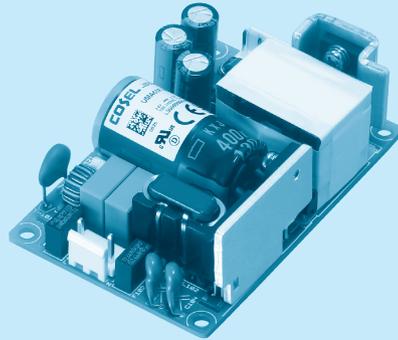

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional \*5  
E : IEC Class II  
T : Terminal block  
Y : with Potentiometer

\*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	UMA60F-5	UMA60F-12	UMA60F-15	UMA60F-24	UMA60F-48
MAX OUTPUT WATTAGE[W]	30	54	52.5	60	60
DC OUTPUT	5V 6A	12V 4.5A	15V 3.5A	24V 2.5A	48V 1.25A

## SPECIFICATIONS

	MODEL	UMA60F-5	UMA60F-12	UMA60F-15	UMA60F-24	UMA60F-48	
INPUT	VOLTAGE[V]	AC85 - 264 1φ					
	CURRENT[A]	ACIN 115V	0.7	1.4			
		ACIN 230V	0.3	0.7			
	FREQUENCY[Hz]	50/60 (47-63)					
	EFFICIENCY[%]	ACIN 115V	80typ	87typ	86typ	88typ	89typ
		ACIN 230V	80typ	88typ	87typ	90typ	91typ
	INRUSH CURRENT[A]	ACIN 115V	25typ				
		ACIN 230V	50typ				
LEAKAGE CURRENT[μA]	ACIN 264V	200max					
TOUCH CURRENT[μA]	ACIN 264V	75max					
OUTPUT	VOLTAGE[V]	5	12	15	24	48	
	CURRENT[A]	6	4.5	3.5	2.5	1.25	
	WATTAGE[W]	30	54	52.5	60	60	
	LINE REGULATION[mV] *1	20max	48max	60max	96max	192max	
	LOAD REGULATION[mV] *1	100max	120max	120max	150max	240max	
	RIPPLE NOISE [mVp-p] *2 I <sub>o</sub> =100%	150 (Bandwidth 20MHz)					
	TEMPERATURE REGULATION[mV]	0~+50°C	100max	120max	180max	240max	480max
	START-UP TIME[ms]	ACIN 115V	40typ				
		ACIN 230V	40typ				
	HOLD-UP TIME[ms]	ACIN 115V	20typ				
ACIN 230V		100typ					
OUTPUT VOLTAGE SETTING[V]	4.90 to 5.30	11.50 to 12.50	14.40 to 15.60	23.00 to 25.00	46.00 to 50.00		
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION [A]	Works over 105% of rating and recovers automatically					
	OVERVOLTAGE PROTECTION[V]	5.75 to 7.00	13.80 to 16.80	17.25 to 21.00	27.60 to 33.60	55.20 to 67.20	
ISOLATION	INPUT-OUTPUT	AC4,000V 1minute, DC500V 100MΩ min (At Room Temperature) 2MOPP					
	INPUT-FG	AC2,000V 1minute, DC500V 100MΩ min (At Room Temperature) 1MOPP					
	OUTPUT-FG	AC2,000V 1minute, DC500V 100MΩ min (At Room Temperature) 1MOPP					
ENVIRONMENT	OPERATING TEMP., HUMID.*3	-20 to +70°C, 20 - 90%RH (Non condensing)					
	STORAGE TEMP., HUMID.	-20 to +75°C, 20 - 90%RH (Non condensing)					
	VIBRATION	10 - 55Hz, 19.6m/s <sup>2</sup> (2G) , 3minutes period, 60minutes each along X, Y and Z axis					
	IMPACT	196.1m/s <sup>2</sup> (20G) , 11ms, once each X, Y and Z axis					
SAFETY AND EMC	AGENCY APPROVALS	ANSI/AAMI ES60601-1, EN60601-1 3rd, C-UL (equivalent to CAN/CSA-C22.2 No.60601-1) , UL62368-1, EN62368-1, C-UL (equivalent to CAN/CSA-C22.2 No.62368-1) , Complies with EN60335-1					
	EMC EMISSION	Complies with CISPR11 classB, CISPR32 classB, EN55011-B, EN55032-B, FCC Part15 classB and FCC Part18 classB					
	EMC IMMUNITY	Complies with EN61000-4-2, 3, 4, 5, 6, 8, 11					
	HARMONIC ATTENUATOR*6	Complies with IEC61000-3-2 (Class A) No built-in active PFC					
OTHERS	CASE SIZE/WEIGHT *7	50.8×24.2×76.2mm [2.0×0.95×3.0 inches] (W×H×D) / 120g max					
	COOLING METHOD	Convection					
WARRANTY	WARRANTY *4	5 years (subject to the operating conditions)					

\*1 Consult us about dynamic load and input response. Measure the output voltage by using the average mode of the tester to deal with the burst operation at low (I<sub>o</sub>=0~20%Atyp) load.

\*2 This is the result of measurement of the testing board with capacitors of 47μF and 0.1μF placed at 150 mm from the output terminals by a 20MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-GikenRM104.

When the load factor is low (I<sub>o</sub>=0~20%Atyp), the switching power loss is reduced by burst operation, which will cause ripple noise to go beyond the specifications.

\*3 Output power derating is required. Refer to "Derating"

\*4 Consult us about details.

\*5 The listed options may affect the published standard specifications. Please contact us for detailed product specifications and safety approvals.

\*6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

\*7 Dimensions below PCB are not included.


\* All parameters not specially mentioned are measured at ACIN 230V, rated load and 25°C of ambient temperature.

\* Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.

\* Parallel operation is not possible with this model.

\* Acoustic noise may be heard from the power supply when used for pulse load.

External view

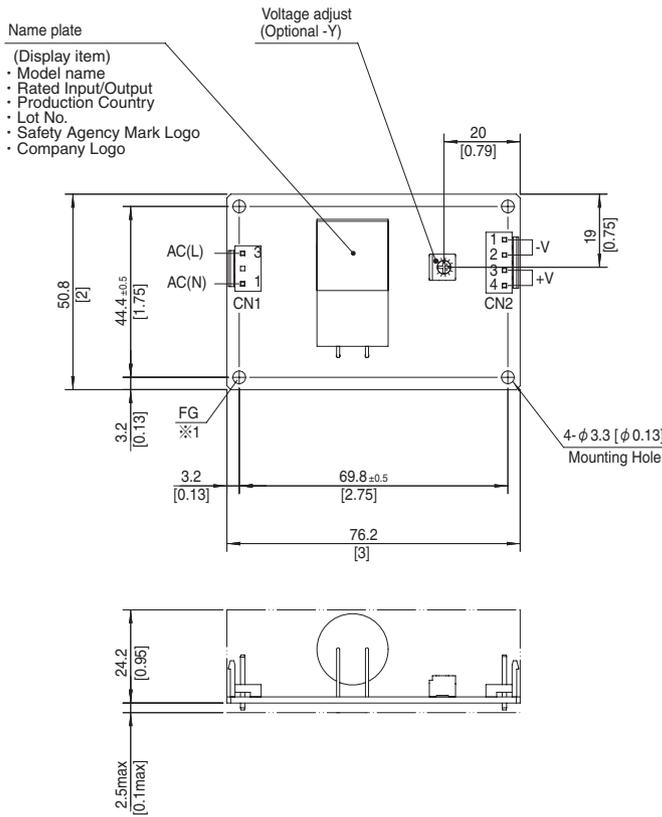

Mating connector and terminal of CN1, CN2


I/O Connector	Mating Connector	Terminal	Mr.
CN1	B2P3-VH	VHR-3N Reel : SVH-21T-P1.1 Loose piece : BVH-21T-P1.1	J.S.T.
CN2	B4P-VH	VHR-4N Chain : SVH-21T-P1.1 Loose piece : BVH-21T-P1.1	J.S.T.

<Pin Assignments>

CN1		CN2	
Pin No.	Input	Pin No.	Output
1	AC(N)	1, 2	-V
2		3, 4	+V
3	AC(L)		

- ※ Dimensions in mm, [ ] =inches
- ※ Tolerance : ±1 [±0.04]
- ※ Weight : 120g max
- ※ PCB Material/thickness : FR-4/1.6 [0.06]
- ※1 The mounting hole is for FG connection.  
The mounting hole in the -E option is not for FG connection.

Derating Curve

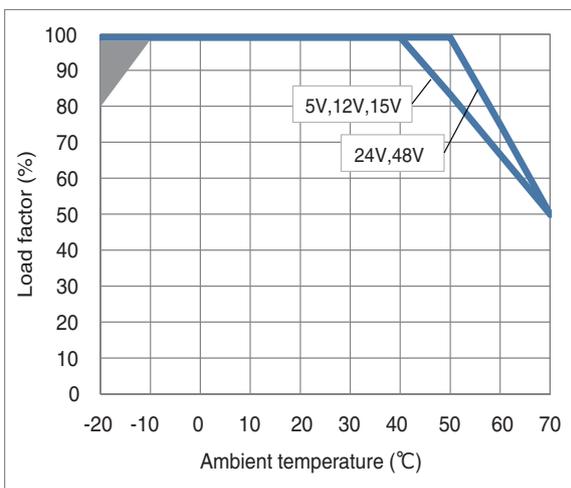

\*The shaded area is the derating required at start-up.

Fig.1 Derating curve depending on ambient temperature


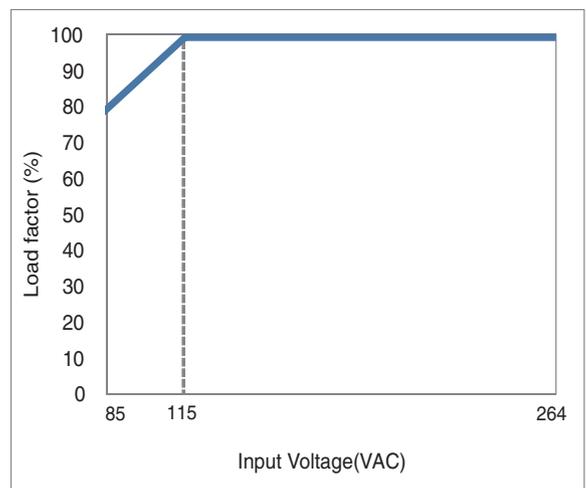


Fig.2 Derating curve depending on input voltage


■ The ambient temperature should be measured 5 to 10 cm away from the power supply so that it won't be influenced by the heat from the power supply. Please consult us for more details.

Assembling and Installation Method

■When the power supply is used with natural convection cooling, the standard mounting position is horizontal.

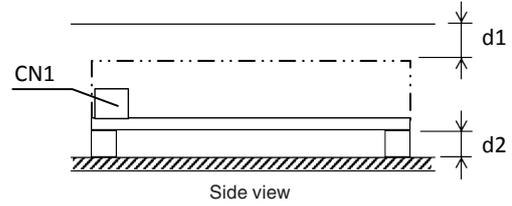


■AC voltage exists on the primary side. Therefore, in order to prevent electric shock, or to meet the leakage current requirements of the safety standard, you need to ensure the proper insulation distance.

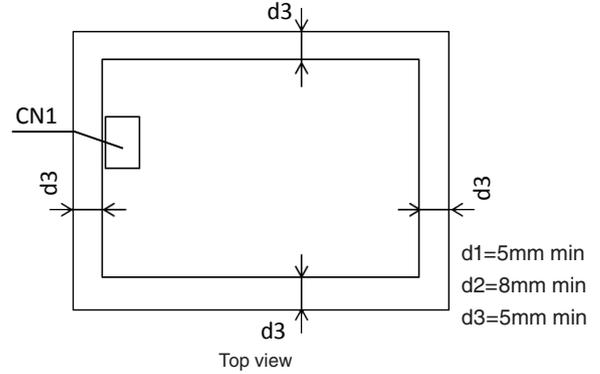

Mounting screw

- The mounting screws should be M3.  
The hatched area indicates the proper area for mounting hardware.
- This power supply is manufactured by SMD technology.  
Stress to the PCB such as twisting or bending may cause damage to the unit, please handle with care.

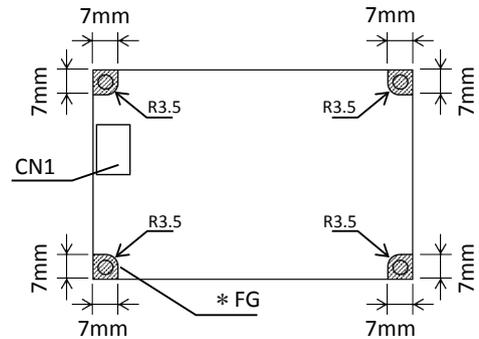

\* Recommend to electrically connect FG to metal chassis for reducing noise.

Instruction Manual

■Please read the “Instruction Manual” and “Before using our product” before you use our product.

Instruction Manual <https://en.cosel.co.jp/product/powersupply/UMA/>  
Before using our product <https://en.cosel.co.jp/technical/caution/index.html>



Basic Characteristics Data

Model	Circuit method	Switching frequency [kHz]	Input current [A]	Rated input fuse	Inrush current protection circuit	PCB/Pattern			Parallel operation
						Material	Single sided	Double sided	
UMA30F	Flyback converter	20 to 125	0.7	250V 2.5A	Thermistor	CEM-3	Yes		No
UMA60F	Flyback converter	20 to 125	1.4	250V 2.5A	Thermistor	FR4		Yes	No