

32 PIN PLCC SOCKET ADAPTER

Model : PA32PL32D-YC

These adapters connect the pins of a 32 pin PLCC device to a 32 pin DIP equivalent.
They accept a PLCC device and plug into a DIP socket.


Order No.

► PA32PL32D-YC

Socket manufacture (Yamaichi), Socket type (LID)


The PA32PL32D-YC socket adapter accepts
with the device family below :

27x010, 27x020, 27x040, 27x080
27x101, 27x201, 27x401, 29F100
27C64, 27C128, 27C256, 27C512
28F256, 28F512

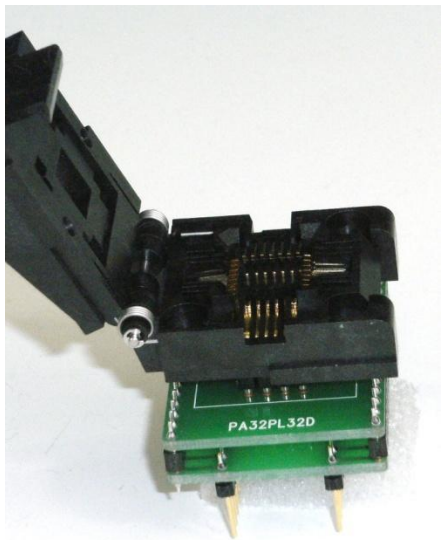

The following chart shows the connections
from the PLCC socket to the adapter's DIP plug.

PLCC32	DIP32	DIP32	PLCC32
1	1	32	32
2	2	31	31
3	3	30	30
4	4	29	29
5	5	28	28
6	6	27	27
7	7	26	26
8	8	25	25
9	9	24	24
10	10	23	23
11	11	22	22
12	12	21	21
13	13	20	20
14	14	19	19
15	15	18	18
16	16	17	17



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EETools:

PA32PL32D-YC