


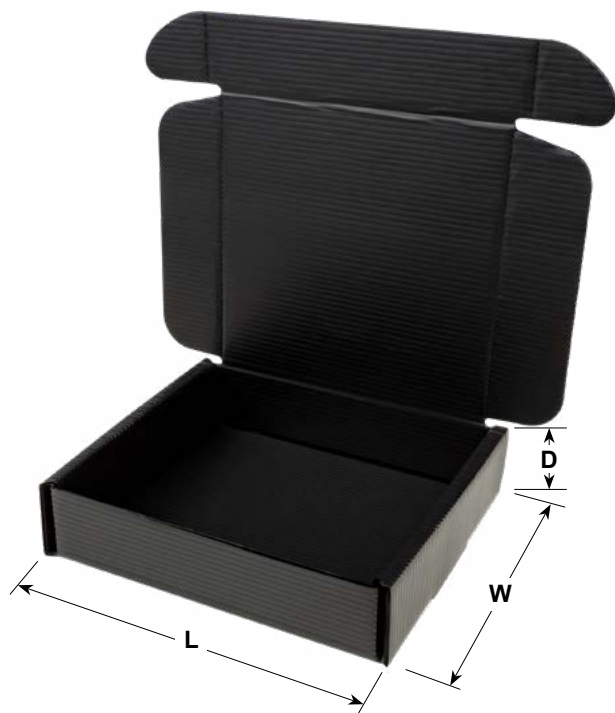

SPECIFICATIONS

Properties

Resin Type

Conductive

Surface Resistance

Humidity Independent

Temperature Tolerance

Melting Point

Typical Values

Polypropylene

Inherently

1×10^2 to $< 1 \times 10^5$ ohms

Yes

-17° F to +230° F

324° F

Features

- Economical, efficient method of shipping and storing static sensitive electronic devices.
- Constructed from conductive extruded high impact polypropylene plastic; provides superior strength and durability
- Meets ANSI/ESD S20.20 and Packaging Standard ANSI/ESD S541
- Chemical and moisture resistant
- Ideal for use where corrugated and/or paper products cannot be used
- Economical alternative to injection molded products
- Ships flat, assembly required
- Made in the United States of America

ITEM	Size ID - L x W x D (IN)
38840	6-3/16" x 6" x 1-1/2"
38842	7" x 5" x 1-1/2"
38845	7" x 5" x 2-1/2"
38848	10-1/2" x 8-1/2" x 1-1/2"
38851	10-1/2" x 8-1/2" x 2-1/2"
38854	12-1/2" x 10-1/2" x 2-1/2"

Dimensional tolerances:
+/- 1/8" unless otherwise specified

RoHS, REACH, and Conflict Minerals Statement:

See the Desco Industries ROHS, Reach and Conflict Minerals Statement
[Descoindustries.com/ROHS3.aspx](https://descoindustries.com/ROHS3.aspx)

See the Protektive Pak Limited Warranty
[Protektivepak.descoindustries.com/Limited-Warranty.aspx](https://protektivepak.descoindustries.com/Limited-Warranty.aspx)



Made in the
United States of America

Specifications and procedures subject to change without notice.

PLASTEK™ CIRCUIT BOARD SHIPPERS

PROTEKTIVE PAK
13520 MONTE VISTA AVENUE, CHINO, CA 91710
PHONE (909) 627-2578
ProtektivePak.com

DRAWING NUMBER
38840

DATE:
January
2019

PROTEKTIVE PAK

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Protektive Pak:

[38840](#) [38842](#) [38845](#) [38848](#) [38851](#) [38854](#)