# ESP32-DevKitM-1

#### [中文]

This user guide will help you get started with ESP32-DevKitM-1 and will also provide more indepth information.

ESP32-DevKitM-1 is an ESP32-MINI-1-based development board produced by Espressif. Most of the I/O pins are broken out to the pin headers on both sides for easy interfacing. Users can either connect peripherals with jumper wires or mount ESP32-DevKitM-1 on a breadboard.



The document consists of the following major sections:

- Getting started: Provides an overview of the ESP32-DevKitM-1 and hardware/software setup instructions to get started.
- Hardware reference: Provides more detailed information about the ESP32-DevKitM-1's hardware.
- Related Documents: Gives links to related documentaiton.

## **Getting Started**

This section describes how to get started with ESP32-DevKitM-1. It begins with a few introductory sections about the ESP32-DevKitM-1, then Section Start Application Development provides instructions on how to do the initial hardware setup and then how to flash firmware onto the ESP32-DevKitM-1.

### **Overview**

This is a small and convenient development board that features:

- ESP32-MINI-1 module
- USB-to-serial programming interface that also provides power supply for the board
- pin headers
- pushbuttons for reset and activation of Firmware Download mode
- a few other components

### **Contents and Packaging**

#### **Retail orders**

If you order a few samples, each ESP32-DevKitM-1 comes in an individual package in either antistatic bag or any packaging depending on your retailer.

For retail orders, please go to https://www.espressif.com/en/company/contact/buy-a-sample.


### **Wholesale Orders**

If you order in bulk, the boards come in large cardboard boxes.

For wholesale orders, please check Espressif Product Ordering Information (PDF)

## **Description of Components**

The following figure and the table below describe the key components, interfaces and controls of the ESP32-DevKitM-1 board.

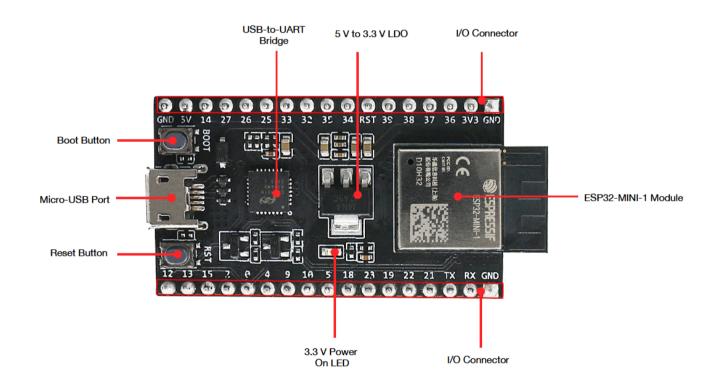

ESP32-DevKitM-1 - front

Key Component	Description
ESP32-MINI-1	ESP32-MINI-1 is a powerful module with 4 MB Flash and a PCB antenr
5 V to 3.3 V LDO	Power regulator converts 5 V to 3.3 V.
Boot Button	Download button. Holding down <b>Boot</b> and then pressing <b>Reset</b> initiates
Reset Button	Reset Button

Micro-USB Port	USB interface. Power supply for the board as well as the communicatio
USB-to-UART Bridge	Single USB-UART bridge chip provides transfer rates up to 3 Mbps.
3.3 V Power On LED	Turns on when the USB is connected to the board. For details, please se
I/O Connector	All available GPIO pins (except for the SPI bus for flash) are broken out

# **Start Application Development**

Before powering up your ESP32-DevKitM-1, please make sure that it is in good condition with no obvious signs of damage.

## **Required Hardware**

- ESP32-DevKitM-1
- USB 2.0 cable (Standard-A to Micro-B)
- Computer running Windows, Linux, or macOS


## **Software Setup**

Please proceed to Get Started, where Section Installation Step by Step will quickly help you set up the development environment and then flash an application example onto your ESP32-DevKitM-1.

### **Hardware Reference**

## **Block Diagram**

A block diagram below shows the components of ESP32-DevKitM-1 and their interconnections.

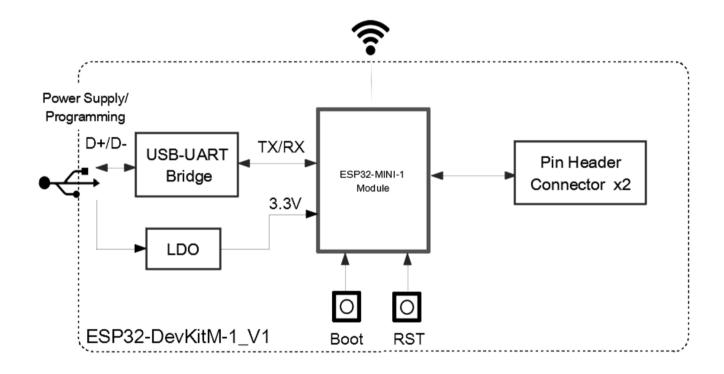

ESP32-DevKitM-1

### **Power Source Select**

There are three mutually exclusive ways to provide power to the board:

- Micro USB port, default power supply
- 5V and GND header pins
- 3V3 and GND header pins

### Warning

- The power supply must be provided using **one and only one of the options above**, otherwise the board and/or the power supply source can be damaged.
- Power supply by micro USB port is recommended.

## **Pin Descriptions**

The table below provides the Name and Function of pins on both sides of the board. For peripheral pin configurations, please refer to ESP32 Datasheet.

No.	Name	Туре	Function
1	GND	Р	Ground
2	3V3	Р	3.3 V power supply
3	136	I	GPIO36, ADC1_CH0, RTC_GPIO0
4	137	I	GPIO37, ADC1_CH1, RTC_GPIO1
5	138	I	GPIO38, ADC1_CH2, RTC_GPIO2

6	139	I	GPIO39, ADC1_CH3, RTC_GPIO3
7	DCT	1	Doost High analyst surrange off

<b>No.</b> 8	Name 134	Type	Function GPIO34, ADC1_CH6, RTC_GPIO4
9	135	I	GPIO35, ADC1_CH7, RTC_GPIO5
10	1032	I/O	GPIO32, XTAL_32K_P (32.768 kHz crystal oscillator input), ADC1_C
11	1033	I/O	GPIO33, XTAL_32K_N (32.768 kHz crystal oscillator output), ADC1_
12	1025	I/O	GPIO25, DAC_1, ADC2_CH8, RTC_GPIO6, EMAC_RXD0
13	1026	I/O	GPIO26, DAC_2, ADC2_CH9, RTC_GPIO7, EMAC_RXD1
14	1027	I/O	GPIO27, ADC2_CH7, TOUCH7, RTC_GPIO17, EMAC_RX_DV
15	IO14	I/O	GPIO14, ADC2_CH6, TOUCH6, RTC_GPIO16, MTMS, HSPICLK, HS
16	5V	Р	5 V power supply
17	IO12	I/O	GPIO12, ADC2_CH5, TOUCH5, RTC_GPIO15, MTDI, HSPIQ, HS2_E
18	IO13	I/O	GPIO13, ADC2_CH4, TOUCH4, RTC_GPIO14, MTCK, HSPID, HS2_I
19	IO15	I/O	GPIO15, ADC2_CH3, TOUCH3, RTC_GPIO13, MTDO, HSPICSO, HS
20	102	I/O	GPIO2, ADC2_CH2, TOUCH2, RTC_GPIO12, HSPIWP, HS2_DATA0,
21	100	I/O	GPIO0, ADC2_CH1, TOUCH1, RTC_GPIO11, CLK_OUT1, EMAC_TX
22	104	I/O	GPIO4, ADC2_CH0, TOUCH0, RTC_GPIO10, HSPIHD, HS2_DATA1,
23	109	I/O	GPIO9, HS1_DATA2, U1RXD, SD_DATA2
24	IO10	I/O	GPIO10, HS1_DATA3, U1TXD, SD_DATA3

25	105	I/O	GPIO5, HS1_DATA6, VSPICS0, EMAC_RX_CLK
2/	1010	1/0	CDIO40 LIC4 DATAZ VCDICLIZ

20 <b>No.</b> 27	Name IO23	Type 1/O	Function GPIO23, HS1_STROBE, VSPID
28	IO19	I/O	GPIO19, VSPIQ, U0CTS, EMAC_TXD0
29	IO22	I/O	GPIO22, VSPIWP, U0RTS, EMAC_TXD1
30	IO21	I/O	GPIO21, VSPIHD, EMAC_TX_EN
31	TXD0	I/O	GPIO1, U0TXD, CLK_OUT3, EMAC_RXD2
32	RXD0	I/O	GPIO3, U0RXD, CLK_OUT2

## **Hardware Revision Details**

No previous versions available.

## **Related Documents**

- ESP32-MINI-1 Datasheet (PDF)
- ESP32-DevKitM-1 Schematics (PDF)
- ESP32-DevKitM-1 PCB layout (PDF)
- ESP32-DevKitM-1 layout (DXF) You can view it with Autodesk Viewer online
- Espressif Product Ordering Information (PDF)
- ESP32 Datasheet (PDF)

For other design documentation for the board, please contact us at sales@espressif.com.

Provide feedback about this document