




# STATFREE® T2 PLUS DISSIPATIVE RUBBER

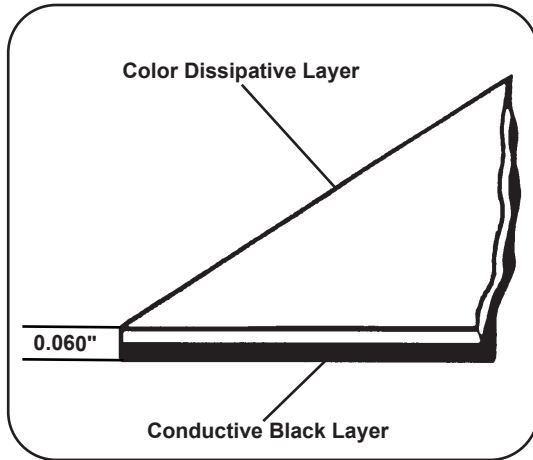

**2-Layer**

## Specifications

### Standard Document

ANSI/ESD S20.20

### Electrical Properties

#### Dissipative Surface Layer

Rtt Resistance:

Rtg Resistance:

#### Ground Plane Layer

Rtt Resistance:

### Typical Values

$1 \times 10^6$  to  $< 1 \times 10^9$  ohms

$1 \times 10^6$  to  $< 1 \times 10^9$  ohms

$< 1 \times 10^6$  ohms

### Physical Properties

Construction:

Thickness:

Color:<sup>2</sup>

Embossing:<sup>2</sup>

Weight:

Hardness:

Dual-layer rubber material<sup>1</sup>

0.060" (1.5mm)

Blue (Top), Dark Blue (Top), Dark Grey (Top), Green (Top), Black (Bottom)

Slight Texture

0.43 lbs./sq. ft. (0.2g/cm<sup>2</sup>)

65 ± 5 Shore "A", per ASTM-D2240

### Other Properties

Heat Resistance:

Chemical Resistance:

Oil Absorption Resistance:

Does not melt or burn when coming into contact with hot solder and soldering irons.

Resistance to degradation by inorganic acids, organic acids, reducing agents, aliphatic hydrocarbons, mineral oil, aldehydes, and amines.

Resists oil absorption to maintain physical and electrical properties.

<sup>1</sup>Rubber material is vulcanized and may contain sulfur

<sup>2</sup>Color and texture may vary between lots and mills

### Tolerances:

Width ± 0.250"

Length ± 0.250" every 1 linear foot of running material.

Thickness ±10%

Matting materials have a tendency to shrink slightly when first unrolled. In applications where length is critical, allow the material to condition for at least 4 hours before cutting to size. Always using care trim with a sharp knife or razor blade.

\*Color and texture may vary between lots and mills.

For product listings, [Click Here](#)

\*\*Tray liners have 3/4" radius corners and do not include grounding hardware.



Made in the  
United States of America

## STATFREE® T2 PLUS DISSIPATIVE, RUBBER, 2-LAYER, 0.060" (1.5mm)

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: [Desco.com](http://Desco.com)  
PHONE (909) 627-8178

DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407  
PHONE (781) 821-8370

MATERIAL  
STATFREE® T2 Plus  
DRAWING PM-132

DATE:  
March  
2021

### Grounding & Cleaning

If the material is used on top of an already properly grounded surface, [grounding hardware](#) may not be necessary. Where no properly grounded surface is available, [grounding hardware](#) is required to provide a path-to-ground. Rtg compliance verification measurements must be made as outlined in ESD TR53 with a [surface resistance meter](#).

See Tech Bulletin [TB-7000](#) for Reztore® Surface & Mat Cleaner Application Instructions.

### Limited Lifetime Warranty:

Desco warrants for one year that Statfree® matting products will be free of defects in materials and workmanship and will guarantee dissipative/conductive mat properties for the life of the mat. Damage to matting caused by misuse of any kind, including using inappropriate cleaners is not covered by [Desco Limited Warranty](#).

### RoHS 3, REACH, and Conflict Minerals Statement

See the Desco Industries RoHS 3, REACH, and Conflict Minerals Statement:

<http://www.descoindustries.com/ROHS3.aspx>

See the Desco Limited Warranty:

<http://desco.descoindustries.com/Limited-Warranty.aspx>

See the Desco Disclaimer:

<http://desco.descoindustries.com/Disclaimer.aspx>

Specifications and procedures subject to change without notice.

# DESCO

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Desco:

[66406](#) [66407](#) [66412](#) [66413](#) [66414](#) [66415](#) [66416](#) [66417](#)