## Low Pass Filter

LFCG-360+

500 DC to 360 MHz

#### THE BIG DEAL

- Insertion Loss, 0.9 dB Typ.
- Stop Band Rejection, 46 dB Typ.
- Pass Band Return Loss, 19 dB Typ.
- 0805 Surface Mount Footprint
- Power Handling: 3 Watts

#### **APPLICATIONS**

- Harmonic Rejection
- VHF/UHF Transmitters / Receivers
- Test and Measurement
- Telecommunications & Broadband Wireless Applications
- Satcom Modems



Generic photo used for illustration purposes only

#### **FUNCTIONAL DIAGRAM**



#### **PRODUCT OVERVIEW**

Mini-Circuits' LFCG-360+ is a miniature low temperature co-fired ceramic (LTCC) low pass filter with a DC to 360 MHz passband supporting a variety of applications. This model provides 0.9 dB typical insertion loss over a wide band due to its rugged monolithic construction. Housed in an 0805 ceramic form factor which is ideal for dense signal chain PCB layouts where it complements MMIC size and performance. The LTCC fabrication process assures minimal RF performance variation while delivering a product that is well suited for environmental extremes of high humidity and temperature.

#### **KEY FEATURES**

Features	Advantages		
Ultra-wide stopband	The LTCC lowpass filter provides a very good stopband rejection until 8500 MHz suitable for wide band applications.		
LTCC Construction	Provides repeatable performance in a rugged, ceramic package well suited for tough environments such as high humidity and temperature extremes.		
Small size, 0805	Saves space in dense circuit board layouts and minimizes the effects of parasitics.		
Rugged Power handling, 3 Watts	Handles up to 3 Watts in a small 0805 package.		

## Low Pass Filter

LFCG-360+

50Ω DC to 360 MHz

#### **ELECTRICAL SPECIFICATIONS**<sup>1,2,3</sup> AT +25°C

	Parameter	F#	Frequency (MHz)	Min.	Тур.	Max.	Units
	Insertion Loss	DC-F1	DC - 360	_	0.9	1.6	dB
Pass Band	Freq. Cut-Off <sup>4</sup>	F2	500	_	3.0	_	dB
	Return Loss	DC-F1	DC - 360	_	19	_	dB
Stop Band Rejection		F3-F4	630 - 830	20	37	_	
	D : "	F4-F5	830 - 1500	37	46	_	15
	Rejection	F5-F6	1500 - 3000	35	43	_	dB
	F6-F7	3000 - 8500	_	20	_		


- 1. Tested in Evaluation Board P/N TB-LFCG-360+
- 2. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.
- 3. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.
- 4. Typical variation ± 5%.

#### **ABSOLUTE MAXIMUM RATINGS**<sup>5</sup>

Parameter	Ratings
Operating Temperature	-55 °C to +125 °C
Storage Temperature	-55 °C to +125 °C
Input Power <sup>6</sup>	3 W @25°C

- 5. Permanent damage may occur if any of these limits are exceeded.
- 6. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 0.7 W at +125°C.

#### **TYPICAL FREQUENCY RESPONSE**





## Low Pass Filter


LFCG-360+


50Ω DC to 360 MHz

#### **TYPICAL PERFORMANCE GRAPHS**

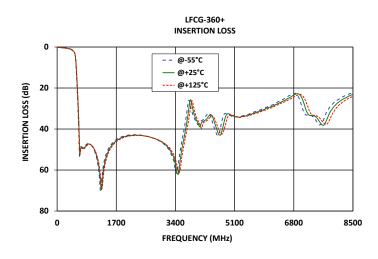

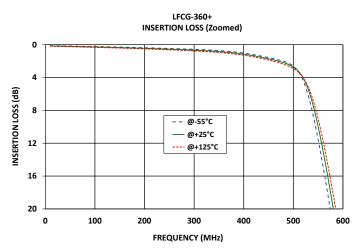

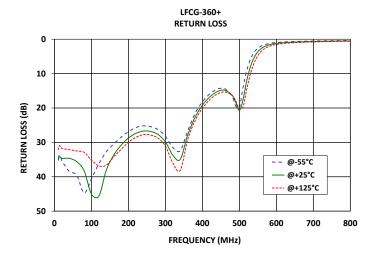

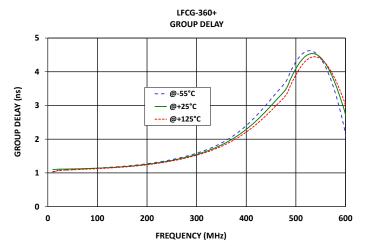

## ow Pass Filter

LFCG-360+

DC to 360 MHz 50Ω

#### **FUNCTIONAL DIAGRAM**





Figure 1. LFCG-360+ Functional Diagram

#### **PAD DESCRIPTION**

Function	Pad Number	Description
RF1 <sup>(Note 2)</sup>	8	Connects to RF Input Port
RF2 <sup>(Note 2)</sup>	4	Connects to RF Output Port
GROUND	1,2,3,5,6,7	Connects to Ground on PCB, (See drawing PL-429)
NC	_	No connection, not used internally. See drawing PL-429 for connection to PCB

#### **SUGGESTED PCB LAYOUT (PL-429)**




#### NOTES:

- 1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER). DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Figure 2. Suggested PCB Layout PL-429

#### **CASE STYLE DRAWING**

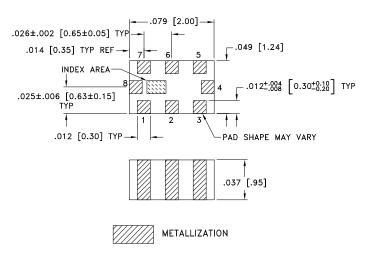

Weight: .008 grams

Dimensions are in inches (mm). Tolerances: 2Pl. ± .01; 3 Pl. ± .005

#### **PRODUCT MARKING\*: WF**

\*Marking may contain other features or characters for internal lot control.



# Low Pass Filter

LFCG-360+

 $50\Omega$  DC to 360 MHz

#### ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASH BOARD.

**CLICK HERE** 

	Data	
Performance Data and Graphs	Graphs	
	S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads	
Case Style	GE0805C-2 Lead Finish: Nickel-Tin	
RoHS Status	Compliant	
Tape and Reel	TR-F114	
Suggested Layout for PCB Design	98-PL-429	
Evaluation Board	TB-LFCG-360+	
Lvaluation board	Gerber File	
Environmental Rating	ENV06T11	

#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



### **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mini-Circuits: