



MMIC REFLECTIONLESS


# Low Pass Filter

**XLF-662M+**

50Ω DC to 6000 MHz

## THE BIG DEAL

- Match to 50Ω in the stop band, eliminates undesired reflections
- Cascadable
- Excellent Power handling
- Temperature stable, up to +105°C
- Small size, 3 x 3 mm
- Protected by US Patents 8,392,495; 9,705,467, additional patent pending
- Protected by China Patent 201080014266.1
- Protected by Taiwan Patent I581494



Generic photo used for illustration purposes only

CASE STYLE: DQ1225

## +RoHS Compliant

The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

## APPLICATIONS

- Wi-Fi
- WiMax
- Microwave Radio
- Military & Space

## GENERAL DESCRIPTION

Mini-Circuits' XLF-662M+ two-section reflectionless filter employs a patented filter topology which absorbs and terminates stop band signals internally rather than reflecting them back to the source. This new capability enables unique applications for filter circuits beyond those suited to traditional approaches. Traditional filters are reflective in the stop band, sending signals back to the source at 100% of the power level. These reflections interact with neighboring components and often result in inter-modulation and other interferences. Reflectionless filters eliminate stop band reflections, allowing them to be paired with sensitive devices and used in applications that otherwise require circuits such as isolation amplifiers or attenuators.

## KEY FEATURES

Features	Advantages
Reflectionless Technology	Reflectionless filters absorb unwanted signals, preventing reflections back to the source. This reduces generation of additional unwanted signals without the need for extra components like attenuators, improving system dynamic range and saving board space.
50Ω Match in Stopband	Reflectionless filters maintain good impedance matching in the stopband, allowing for integration with high gain, wideband amplifiers without the risk of creating out-of-band instabilities.
Excellent RF Performance Repeatability	Fabricated on a GaAs process, X-series filters are inherently repeatable for large-volume production.
Excellent Stability over temperature	With $\pm 0.3$ dB variation over temperature, is ideal for use in wide temperature range applications without the need for additional temperature compensation.
Excellent Power Handling in a Compact Package	High power handling extends the usability of these filters to the transmit path for inter-stage filtering.





MMIC REFLECTIONLESS

## Low Pass Filter

XLF-662M+

50Ω DC to 6000 MHz

ELECTRICAL SPECIFICATIONS<sup>1</sup> AT +25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	DC-F1	DC-6000	—	1.3	3.1	dB
	Frequency Cut-Off	F2	6740	—	3.0	—	dB
	VSWR	DC-F1	DC-6000	—	1.2	—	:1
Stop Band	Rejection	F3-F4	9200-14000	21	30	—	dB
		F4-F5	14000-26000	25	36	—	dB
	VSWR	F3-F4	9200-14000	—	1.3	—	:1
		F4-F5	14000-26000	—	1.5	—	:1

1. Measured on Mini-Circuits Characterization Test Board TB-844-662MC+

ABSOLUTE MAXIMUM RATINGS<sup>2</sup>


Parameter	Ratings
Operating Temperature	-55°C to +105°C
Storage Temperature	-65°C to +150°C
RF Power Input, Passband <sup>2</sup> (DC-F1) <sup>3</sup>	5 W at 25°C
RF Power Input, Stopband (F2-F5) <sup>4</sup>	1.3 W at 25°C

2. Permanent damage may occur if any of these limits are exceeded.

3. Passband rating derates linearly to 2.5 W at 105°C ambient

4. Stopband rating derates linearly to 0.6 W at 105°C ambient

## SPECIFICATION DEFINITION

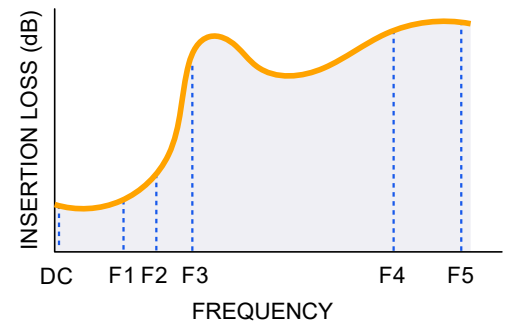



MMIC REFLECTIONLESS



# Low Pass Filter

**XLF-662M+**

Mini-Circuits


50Ω DC to 6000 MHz

## SIMPLIFIED SCHEMATIC AND PAD DESCRIPTION

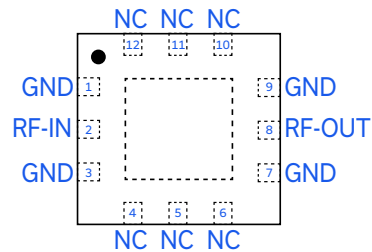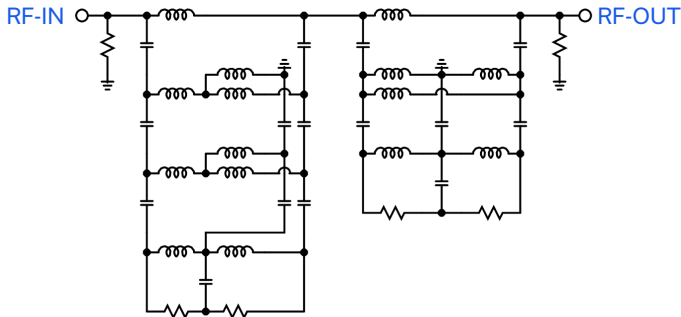

Function	Pad Number	Description
RF-IN	2	RF Input Pad
RF-OUT	8	RF Output Pad
GND	1,3,7,9, Paddle	Connected to ground
NC (GND Externally)	4,5,6,10,11,12	No internal connection

## PRODUCT MARKING

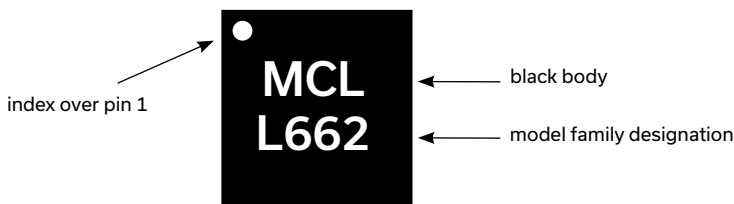

Marking may contain other features or characters for internal lot control

Mini-Circuits



MMIC REFLECTIONLESS

# Low Pass Filter



**XLF-662M+**

Mini-Circuits

50Ω DC to 6000 MHz

**TYPICAL PERFORMANCE DATA AT +25°C**

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
10	0.57	1.03
100	0.59	1.04
500	0.70	1.13
1000	0.85	1.25
2000	1.11	1.24
3000	1.30	1.08
4000	1.58	1.24
5000	1.88	1.26
6000	2.31	1.10
6740	2.99	1.09
8000	6.73	1.12
9200	27.64	1.13
10000	29.12	1.42
11000	32.89	1.41
12000	28.51	1.29
14000	30.77	1.39
17000	35.66	2.01
20000	37.51	1.64
23000	36.23	2.32
26000	32.78	2.00

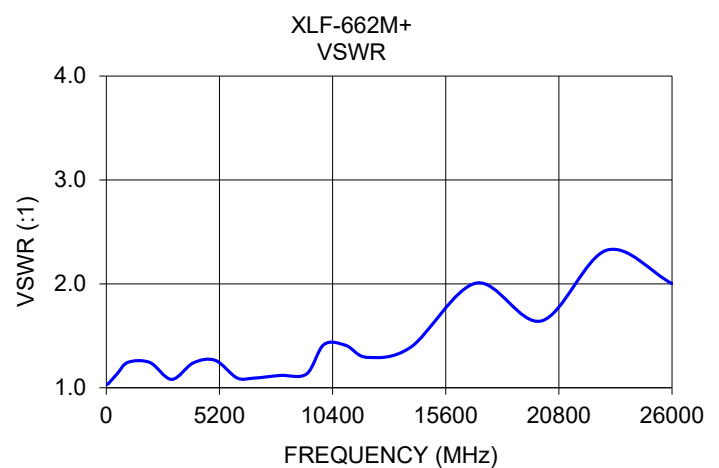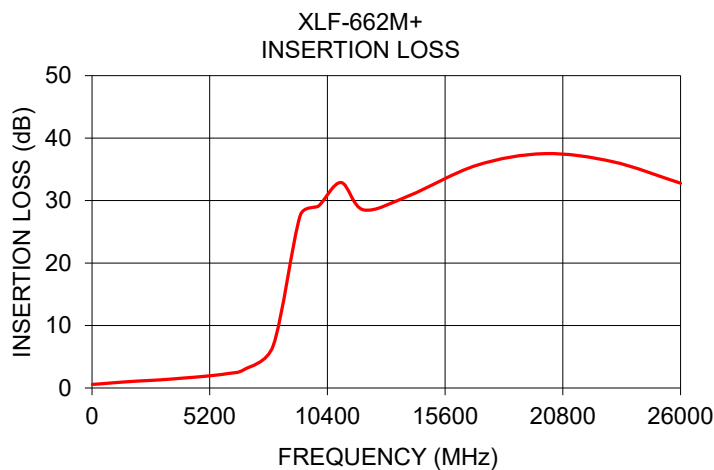



MMIC REFLECTIONLESS

# Low Pass Filter

**XLF-662M+**

Mini-Circuits

50Ω DC to 6000 MHz

ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASH BOARD. TO ACCESS [CLICK HERE](#)

Performance Data	Data Table
	Swept Graphs
	S-Parameter (S3P Files) Data Set (.zip file)
Case Style	DQ1225 Plastic package, exposed paddle lead finish: matte-tin
Tape & Reel Standard quantities available on reel	F66 7" reels with 20, 50, 100, 200, 500 ,1000 devices
Suggested Layout for PCB Design	PL-451
Evaluation Board	TB-844-662M+ (without connectors) TB-844-662MC+ (with connectors) B20-118-F1+ Connector sold separately
Environmental Ratings	ENV82

## ESD RATING

Human body model (HBM): Class 1A (250 to <500V) in accordance with ANSI/ESD 5.1-2001

## MSL RATING


Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D





## REFLECTIONLESS FILTER APPLICATION NOTE

Application Circuit Example: Pairing mixers with reflectionless filters to improve system dynamic range

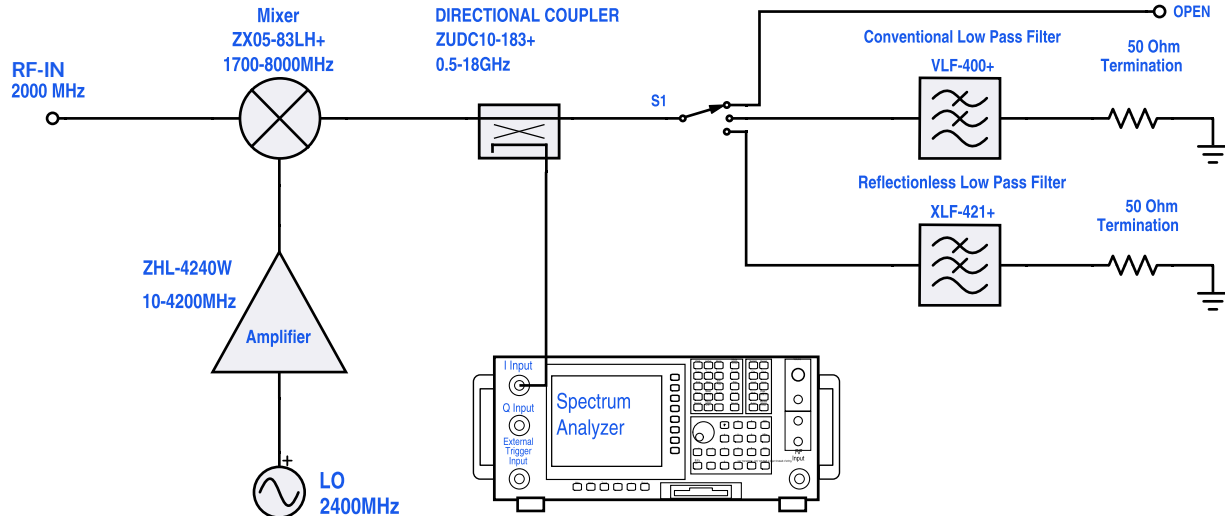

Test block diagram: IF output reflection spectrum with single input frequency

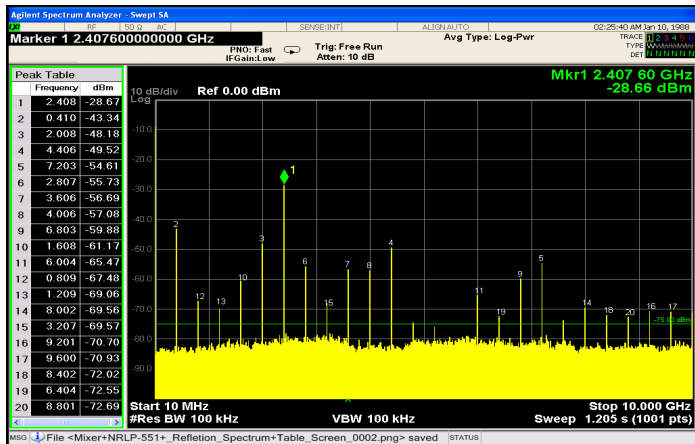


Figure 1. IF output reflection spectrum without filter


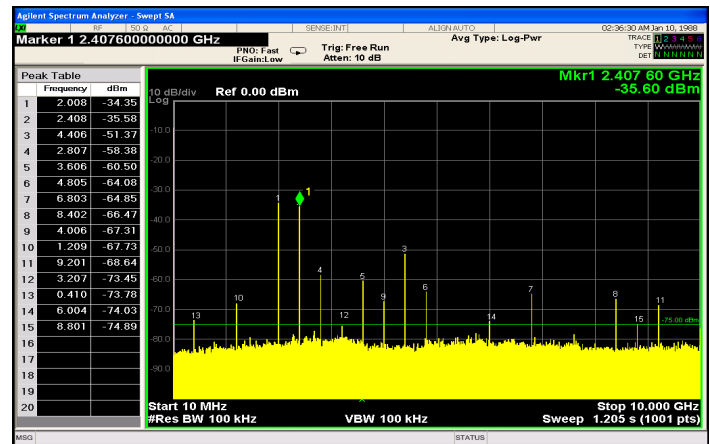


Figure 2. IF output reflection spectrum with conventional filter

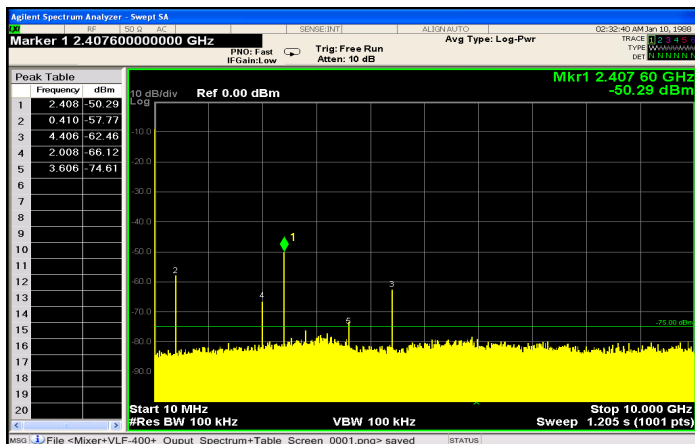

An application circuit was assembled to measure the IF reflection spectrum at the output of a mixer when the mixer was paired with a conventional filter versus a reflectionless filter.

While the conventional filter reduces the reflections present when the mixer is used alone (no filter), the reflectionless filter virtually eliminates those reflections altogether.

The reflected signal at marker 1 in the figures above exhibits a reduction of more than 20 dB from -28.7 dBm to -50.3 dBm when the reflectionless filter is used as compared to the conventional filter, thus eliminating unwanted spurious mixing products and improving system dynamic range.

For more information, refer to application note [AN-75-007](#).

## NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[XLF-662M+](#)