



The Future of Analog IC Technology®

EV024-10-S-00A

Primary Side CC/CV Flyback Regulator Universal Input, 5V/2A USB Charger Evaluation Board

DESCRIPTION

The MP024-10 is a low cost offline primary-side Flyback regulator with simple external circuit. It provides accurate constant voltage and constant current regulation without opto-coupler and secondary feedback circuit. And it has integrated 700V MOSFET and high-voltage start-up current source.

The MP024-10 operates in Discontinuous Conduction mode using variable off-time control. Its power-saving technologies limit the no-load power consumption to less than 30mW.

The MP024-10 also features complete protection functions such as VCC under-voltage lockout, over-current protection, over temperature protection, open loop protection and over voltage protection.

The MP024-10's variable switching frequency method provides natural spectrum shaping to smooth EMI signature, which suits for offline low power battery charger and adapter.

The MP024-10 is available in the SOIC8-7B package.

ELECTRICAL SPECIFICATION

| Parameter | Symbol | Value | Units |
|----------------|-----------|-----------|-------|
| Input Voltage | V_{IN} | 85 to 265 | VAC |
| Output Voltage | V_{OUT} | 5 | V |
| Output Current | I_{OUT} | 2 | A |
| Output Power | P_{OUT} | 10 | W |

FEATURES

- Primary-Side-Control without Opto-Coupler and Secondary Feedback Circuit
- Precise Constant Current and Constant Voltage Control (CC/CV)
- Variable Off-Time Peak-Current Control
- 700V/4.5Ω Integrated MOSFET
- 700V High-Voltage Current Source
- 30mW No-Load Power Consumption
- Programmable Cable Compensation
- Multiple Protections: OVP, OCKP, SSP, OLP, TSD, and VCC UVLO
- Low Cost and Simple External Circuit
- Available in the SOIC8-7B Package

APPLICATIONS

- Cell Phone Chargers
- Adapters for Handheld Electronics
- Stand-By and Auxiliary Power Supplies

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance. "MPS" and "The Future of Analog IC Technology", are Registered Trademarks of Monolithic Power Systems, Inc.




Warning: Although this board is designed to satisfy safety requirements, the engineering prototype has not been agency approved. Therefore, all testing should be performed using an isolation transformer to provide the AC input to the prototype board.

EV024-10-S-00A EVALUATION BOARD



TOP VIEW

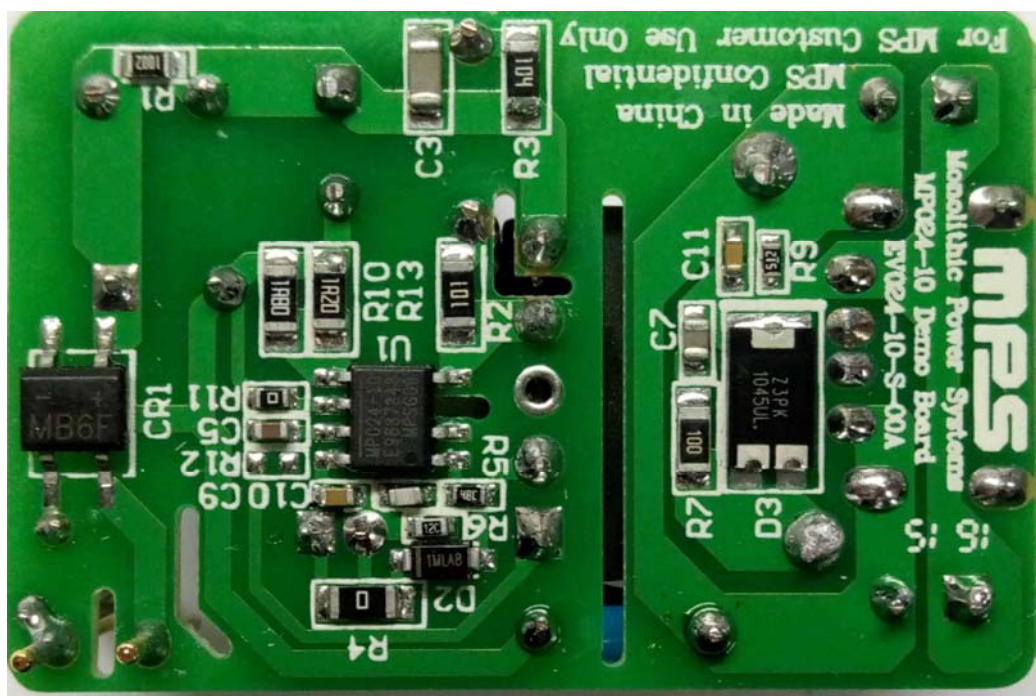

BOTTOM VIEW

(L x W x H) 48mm x 32mm x 17mm

| Board Number | MPS IC Number |
|----------------|---------------|
| EV024-10-S-00A | MP024GS-10 |

EVALUATION BOARD SCHEMATIC

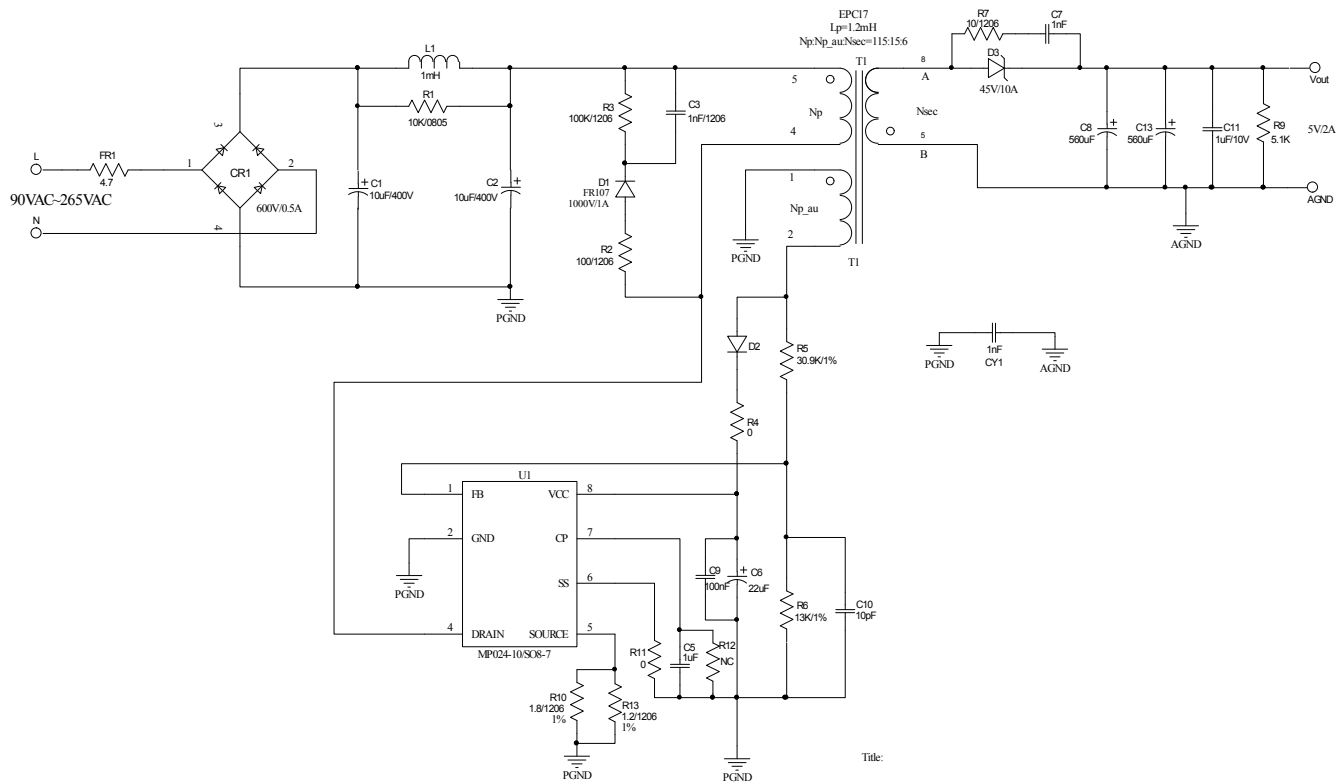


Figure 1—Schematic

PCB LAYOUT (SINGLE-SIDED)

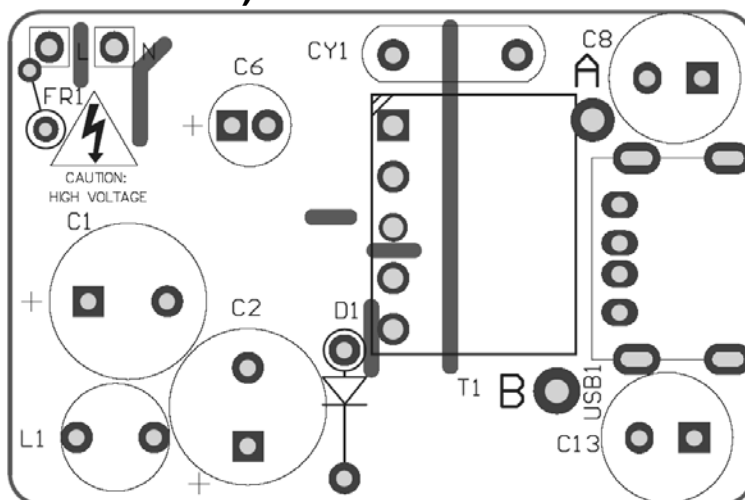


Figure 2—Top Layer

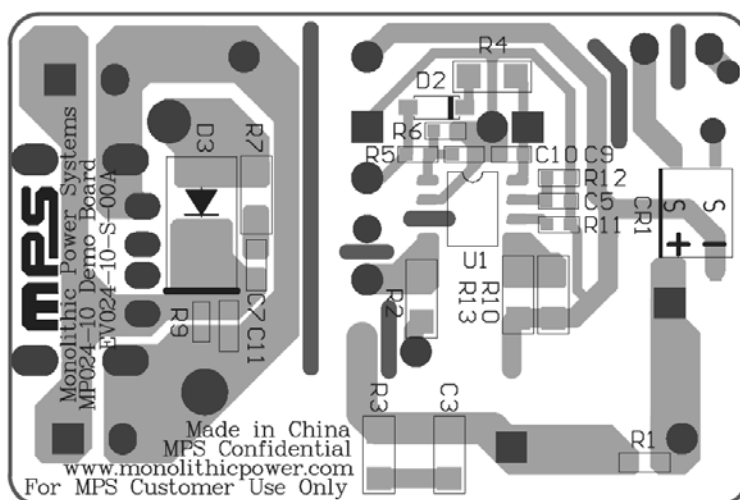


Figure 3—Bottom Layer

CIRCUIT DESCRIPTION

The EV024-10-S-00A is configured in a 5V/2A CC/CV output cell phone charger, it uses primary-side-control without opto-coupler which can mostly simplify the schematic and get a cost effective BOM.

FR1 is used to protect circuit from component failure or some excessive short events; also it can restrain the inrush current.

C1, L1 and C2 compose π filter to guarantee the conducted EMI meet standard EN55022.

R3, C3, and D1 compose primary side snubber. It absorbs the leakage inductance energy when MOSFET turns off to restrain the high spike. R2 is used in the snubber to damp the oscillation, which can couple to auxiliary winding and distort the FB detection.

D3 is output diode. Schottky diodes are recommended for their fast switching speed and low forward-voltage drop for better high or low temperature CV regulation and efficiency.

C7 and R7 compose the secondary side snubber. It restrains the high spike of D3.

R5 and R6 is the resistor divider for FB detection. For better application performance, select the resistor divider values from 10k Ω to 100k Ω to limit noise from adjacent components on FB.

T1 is power transformer. It should be designed properly to satisfy the power delivery and achieve good EMI.

C8 and C13 are output capacitors. They should be low ESR electrolytic capacitor for better output ripple and even better efficiency.

R9 is the dummy load. It is used for good no load regulation. If the dummy load is not used, the output voltage will run away under no load condition due to minimum switching frequency limitation.

EV024-10-S-00A BILL OF MATERIALS

| Qty | RefDes | Value | Description | Package | Manufacturer | Manufacturer_P/N |
|--------|---------|---|-----------------------------------|-------------------|--------------|--------------------|
| 2 | C1, C2 | 10uF | Electrolytic Capacitor;400V | DIP | Chengxing | 400V/10uF |
| 1 | C3 | 1nF | Ceramic Capacitor;630V;U2J | 1206 | Murata | GRM31A7U2J102JW31D |
| 1 | C5 | 1uF | Ceramic Capacitor;25V;X5R | 0603 | TDK | C1608X5R1E105K |
| 1 | C6 | 22uF | Electrolytic Capacitor;50V | DIP | 江海 | CD281L-50V22 |
| 1 | C7 | 1nF | Capacitor;250V;X7R | 0805 | TDK | C2012X7R2E102K |
| 2 | C8, C13 | 560uF | Electrolytic Capacitor;6.3V | DIP | 江海 | HEN0J561MB12 |
| 1 | C9 | 100nF | Ceramic Capacitor;50V;X7R | 0603 | muRata | GRM188R71H104KA93D |
| 1 | C10 | 10pF | Ceramic Capacitor;50V;C0G | 0603 | muRata | GRM1885C1H100JA01 |
| 1 | C11 | 1uF/10V | Ceramic Capacitor;10V;X7R | 0603 | Murata | GRM188R71A105KA61D |
| 1 | CR1 | MB6F | Diode;600V;0.5A | SOP-4 | Bangdayuan | MB6F |
| 1 | CY1 | 1nF | Y Capacitor;250V;20% | DIP | 鸿科 | JYK08F102ML72N |
| 1 | D1 | FR107 | Diode;1000V;1A | DO-41 | Diodes | FR107 |
| 1 | D2 | S1ML | Diode;1000V;1.0A | SOD-123 | Taiwan Semi | S1ML |
| 1 | D3 | Z3PK1045LH | Diode;45V;10A | Z3PK | Maxmega | PDS760 |
| 1 | FR1 | 4.7 | Resistor;5%;1W | DIP | Yageo | FKN1WSJT-52-4R7 |
| 1 | L1 | 1mH | Inductor;1mH;420mA | DIP | Wurth | 7447462102 |
| 1 | R1 | 10K | Film Resistor;1% | 0805 | Yageo | RC0805FR-0710KL |
| 1 | R2 | 100 | Film Resistor;5%;1/4W | 1206 | Yageo | RC1206JR-07100RL |
| 1 | R3 | 100K | Film Resistor;5% | 1206 | Yageo | RC1206JR-07100KL |
| 1 | R4 | 0 | Film Resistor;5% | 1206 | Yageo | RC1206JR-070R |
| 1 | R7 | 10 | Film Resistor;5% | 1206 | Yageo | RC1206JR-0710R |
| 1 | R5 | 30.9K | Film Resistor;1%; | 0603 | Yageo | RC0603FR-0730K9L |
| 1 | R6 | 13K | Film Resistor;1% | 0603 | Yageo | RC0603FR-0713KL |
| 1 | R9 | 5.1K | Film Resistor;1% | 0603 | Yageo | RC0603FR-075K1L |
| 1 | R10 | 1.8 | Film Resistor;1%;1/4W | 1206 | Yageo | RC1206FR-071R8L |
| 1 | R11 | 0 | Film Resistor;5% | 0603 | Yageo | RC0603JR-070RL |
| 0 | R12 | NC | No Connected | | | |
| 1 | R13 | 1.2 | Film Resistor;1%;1/4W | 1206 | Yageo | RC1206FR-071R2L |
| 1 | T1 | | Transformer, Lm=1.2mH | EPC17 Vertical | Emei(1) | FX0444 |
| 1 | U1 | MP024-10 | Primary Side Flyback Regulator | SOIC8-7 | MPS | MP024-10 |
| 1 | USB1 | | USB Output Port | | Any | |
| Notes: | | (1) Emei transformer sample request please log on website: www.emeigroup.com | | | | |

TRANSFORMER SPECIFICATION

Basic Characteristics

| Parameter | Value |
|--------------------|--------------------------------------|
| Core | EPC17 |
| Bobbin | EPC17 Vertical, 5+0 Pin |
| Primary Inductance | 1.2mH |
| Core Material | PC40 or equivalent |
| Turn Ratio | $N_P:N_S:N_{P_AUX}:N_C=115:6:15:18$ |

Electrical Diagram

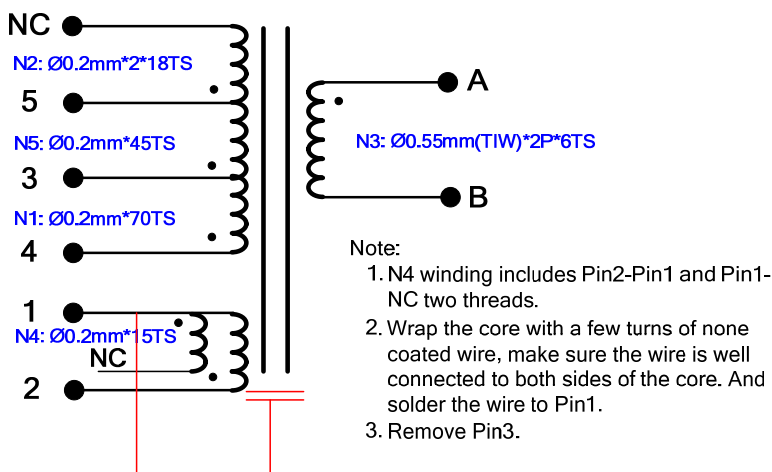


Figure 4—Transformer Electrical Diagram

Winding Diagram

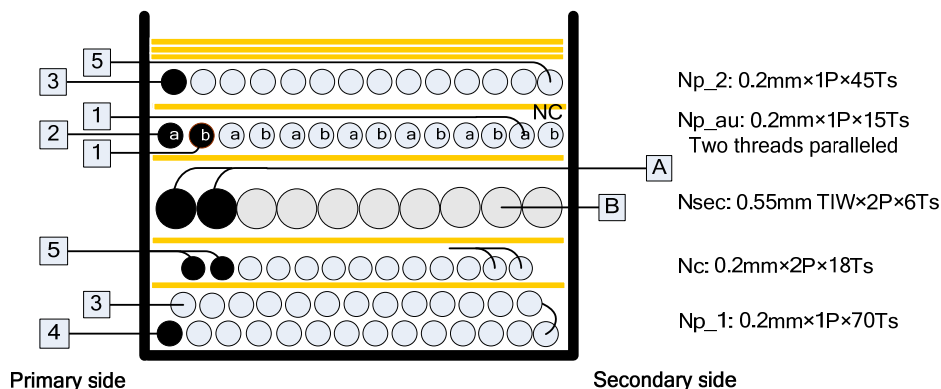


Figure 5—Winding Diagram

Winding Order

| Tapes (T) | Winding | Start-End | Wire Diameter (Ø) | Turns (T) |
|-----------|---------|-----------|-------------------|-------------|
| 0 | N1 | 4→3 | 0.2*1 | 70 |
| 1 | N2 | 5→NC | 0.2*2 | 18 |
| 1 | N3 | A→B | 0.55*2 TIW | 6 |
| 1 | N4 | 2→1 | 0.2*1 | 15 |
| | | 1→NC | 0.2*1 | |
| 1 | N5 | 3→5 | 0.2*1 | 45 |

Electrical Specifications


| | | |
|----------------------------|--|-----------|
| Electrical Strength | 60 seconds 60Hz, from PRI. to SEC. | 3500VAC |
| | 60 seconds 60Hz, from PRI. to CORE | 1500VAC |
| | 60 seconds 60Hz, from SEC. to CORE. | 1500VAC |
| | 60 seconds 60Hz, from N1 to N4. | 500VAC |
| Primary Inductance | Pins 4 - 5, all other windings open, measured at 60kHz, 0.1 VRMS | 1.2mH±10% |

EVB TEST RESULTS

$V_{IN} = 230V_{AC}$, $V_{OUT} = 5V$, $I_{OUT} = 2A$, $T_A = 25^{\circ}C$, unless otherwise noted.


Steady State

$V_{IN} = 265V_{AC}$

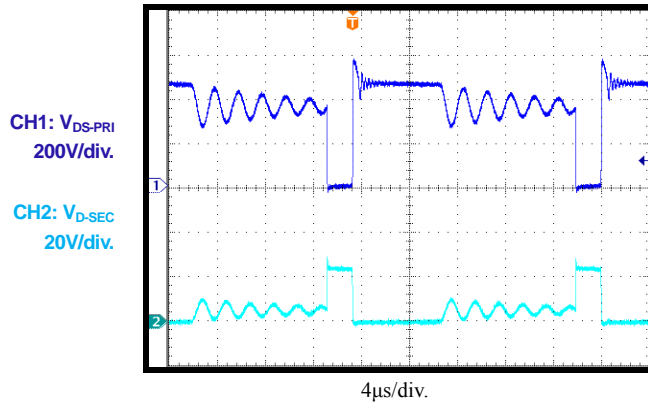


Power On


$V_{IN} = 265V_{AC}$

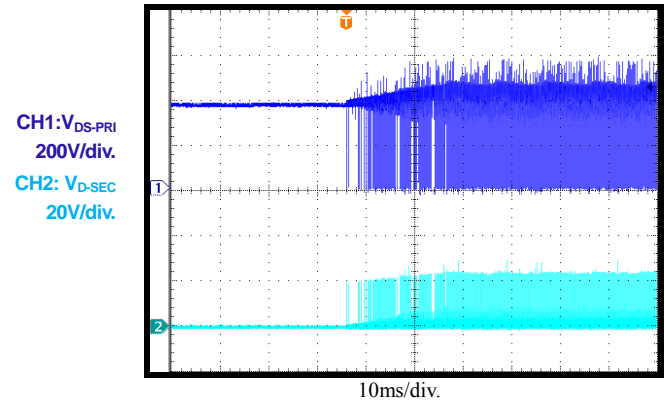


OLP Entry

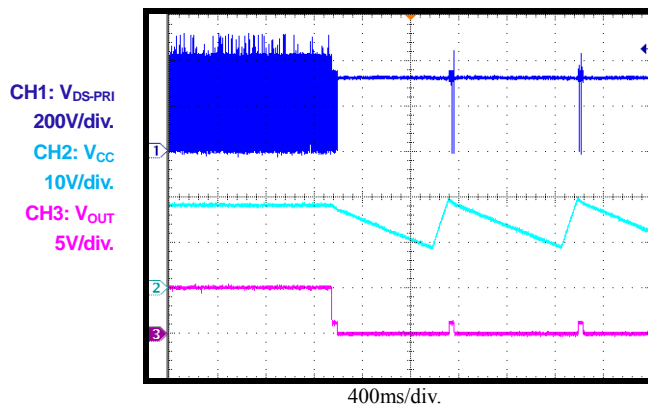


OLP Recovery

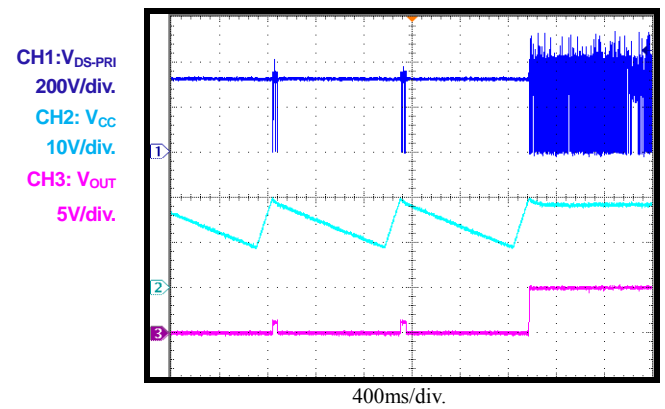

OLP Power On

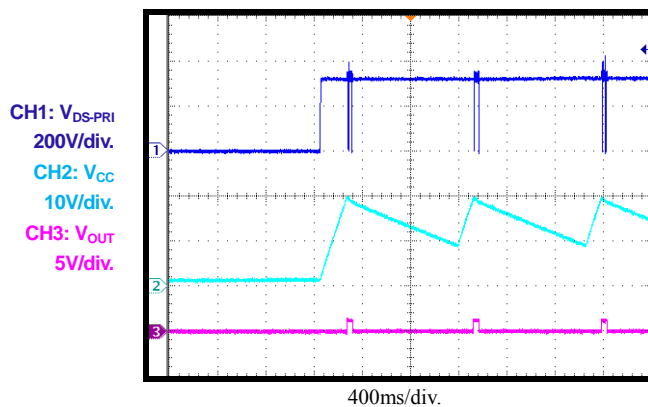


Short Circuit Entry

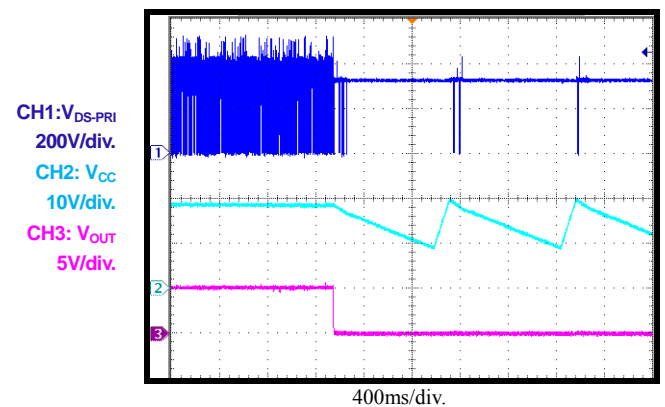


EVB TEST RESULTS *(continued)*

$V_{IN} = 230V_{AC}$, $V_{OUT} = 5V$, $I_{OUT} = 2A$, $T_A = 25^{\circ}C$, unless otherwise noted.

Short Circuit Recovery

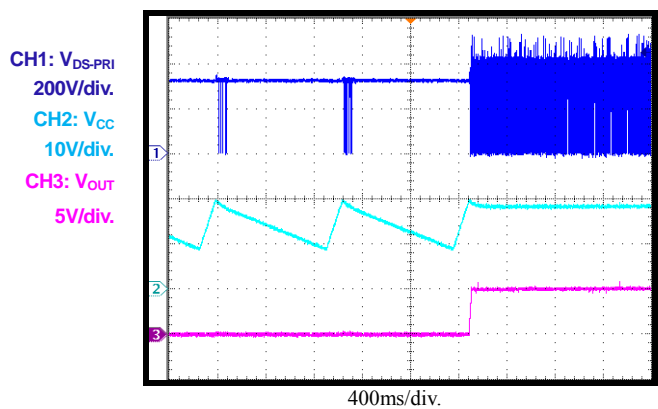


Short Circuit Power On

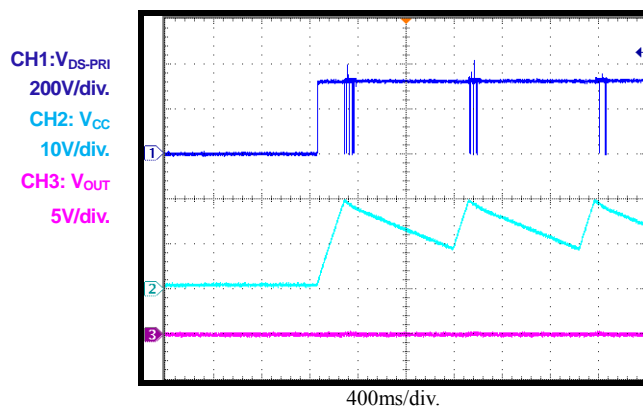


EVB TEST RESULTS (continued)

$V_{IN} = 230V_{AC}$, $V_{OUT} = 5V$, $I_{OUT} = 2A$, $T_A = 25^{\circ}C$, unless otherwise noted.

No Load Consumption

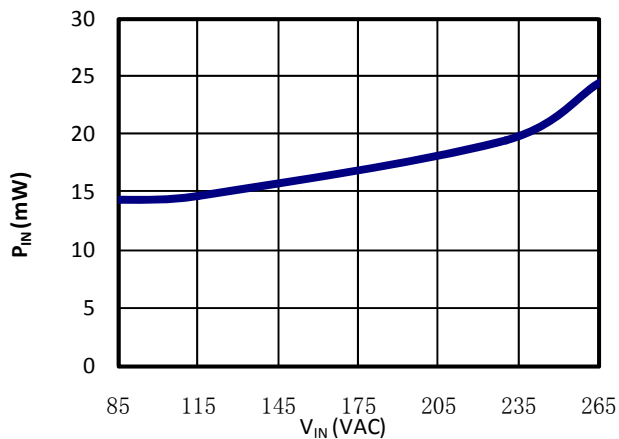


Efficiency

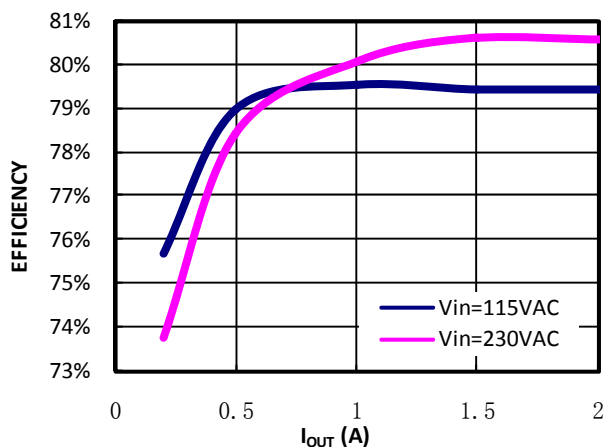


Conducted EMI

$V_{IN}=115V_{AC}$, L Line

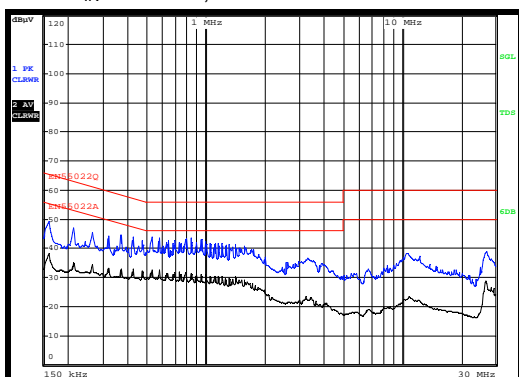


Conducted EMI

$V_{IN}=115V_{AC}$, N Line

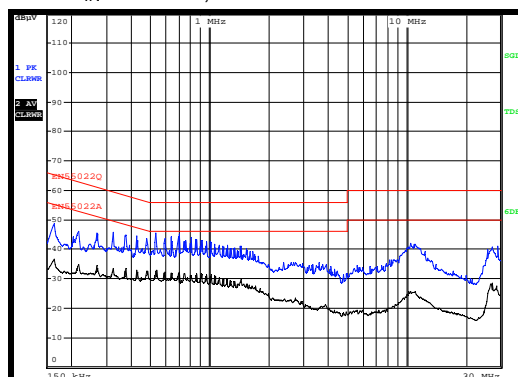


Conducted EMI

$V_{IN}=230V_{AC}$, L Line

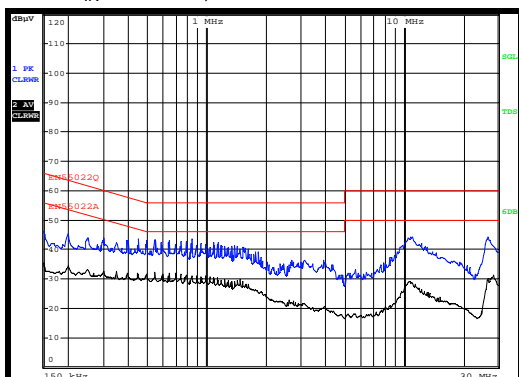

Conducted EMI

$V_{IN}=230V_{AC}$, N Line

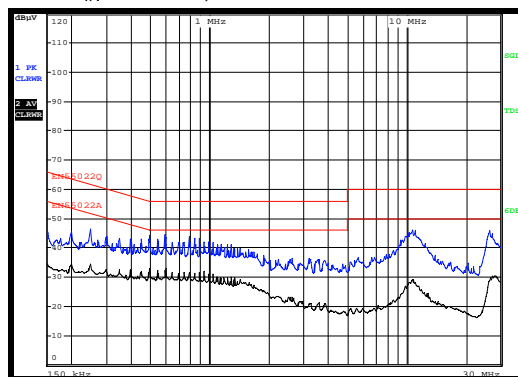

QUICK START GUIDE

1. Preset Power Supply to $85\text{VAC} \leq V_{\text{IN}} \leq 265\text{VAC}$.
2. Turn Power Supply off.
3. Connect the Line and Neutral terminals of the power supply output to L and N port.
4. Connect load with a USB port.
5. Turn Power Supply on after making connections.

NOTICE: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Monolithic Power Systems \(MPS\):](#)

[EV024-10-S-00A](#)