

## DESCRIPTION

The EV4088-N-00A Evaluation Board is designed to demonstrate the capabilities of MP4088. The MP4088 is a highly integrated TRIAC dimmable LED driver with high power factor. It is specifically designed for high-line input (230VAC), no-isolated, TRIAC-dimmable LED lighting applications, especially for the low cost and small form factor applications.

The MP4088 integrates a 500V MOSFET. Only a single winding inductor is required to realize the solution. It features MPS's proprietary hybrid operation mode which is designed to achieve good dimming performance.

The EV4088-N-00A is typically designed for driving an 8.1W TRIAC dimmable LED bulb with 60V<sub>TYP</sub>, 135mA LED load from 198VAC to 265VAC, 50Hz.

The EV4088-N-00A has an excellent efficiency and meets IEC61547 surge immunity, IEC61000-3-2 Class C harmonics and EN55015 conducted EMI requirements. It has multi-protection function as over-voltage protection; output short-circuit protection, thermal shut down, etc.

## ELECTRICAL SPECIFICATION

| Parameter              | Symbol           | Value      | Units |
|------------------------|------------------|------------|-------|
| Input Voltage          | V <sub>IN</sub>  | 198 to 265 | VAC   |
| Output Voltage         | V <sub>OUT</sub> | 60         | V     |
| LED Current            | I <sub>LED</sub> | 135        | mA    |
| Output Power           | P <sub>OUT</sub> | 8.1        | W     |
| Efficiency (full load) | η                | >82        | %     |
| Power Factor           | PF               | >0.76      |       |
| THD                    | THD              | <50.3      | %     |

## FEATURES

- Excellent TRIAC Dimming Performance
- Lowest Cost BOM
- Constant Current LED Driver
- Good LED Current Accuracy
- 500V MOSFET Integrated
- Internal HV Fast Start-Up
- Single Winding Inductor
- High Power Factor(>0.76)
- LED Current Foldback at High Temperature
- Thermal Shutdown (Auto Restart with Hysteresis)
- VCC Under Voltage Lockout with Hysteresis (UVLO)
- Programmable Over Voltage Protection
- Output Short Circuit Protection
- Fit inside GU10 Bulb Enclosure

## APPLICATIONS



- Solid State Lighting
- Industrial & Commercial Lighting
- Residential Lighting

All MPS parts are lead-free and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance. "MPS" and "The Future of Analog IC Technology", are Registered Trademarks of Monolithic Power Systems, Inc.



**Warning:** Although this board is designed to satisfy safety requirements, the engineering prototype has not been agency approved. Therefore, all testing should be performed using an isolation transformer to provide the AC input to the prototype board.


## EV4088-N-00A EVALUATION BOARD

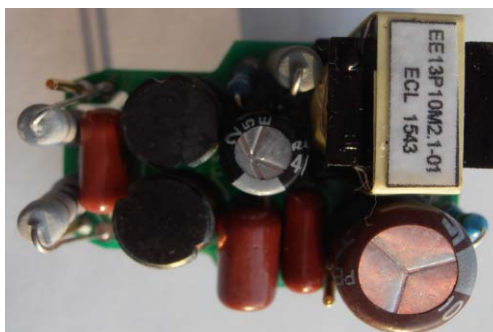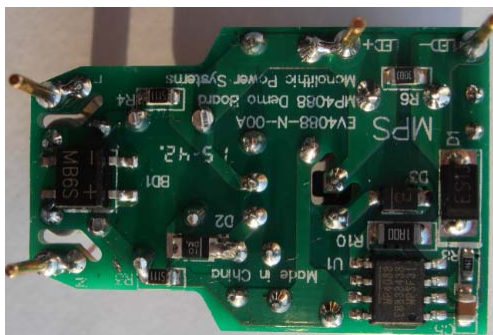

(L x W x H) 35mm x 22.5mm x 17.5mm

| Board Number | MPS IC Number |
|--------------|---------------|
| EV4088-N-00A | MP4088GN      |

## EVALUATION BOARD SCHEMATIC

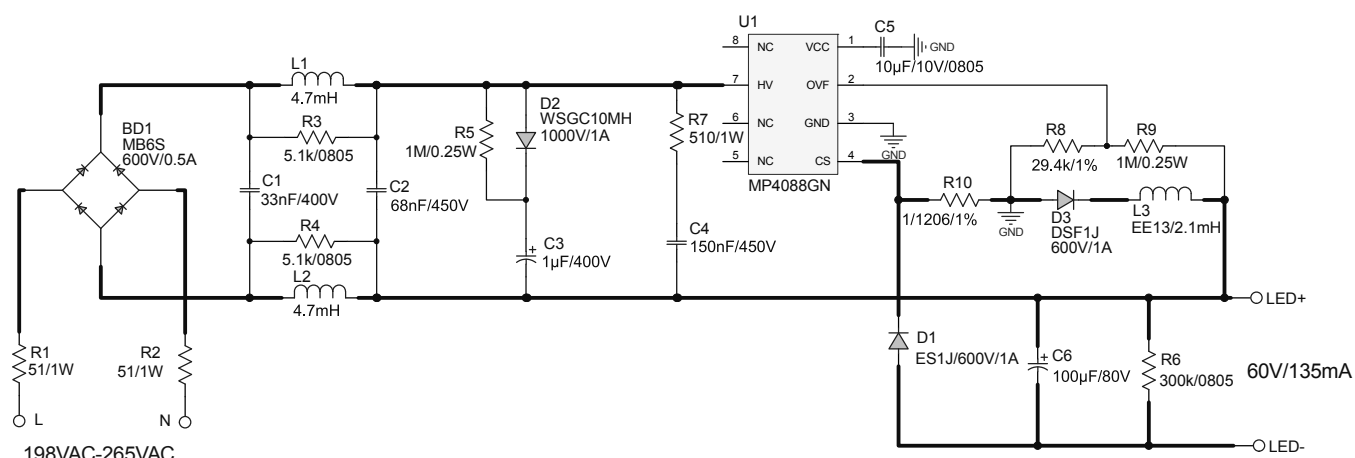

**Figure 1—Schematic**

## PCB LAYOUT (SINGLE-SIDED)

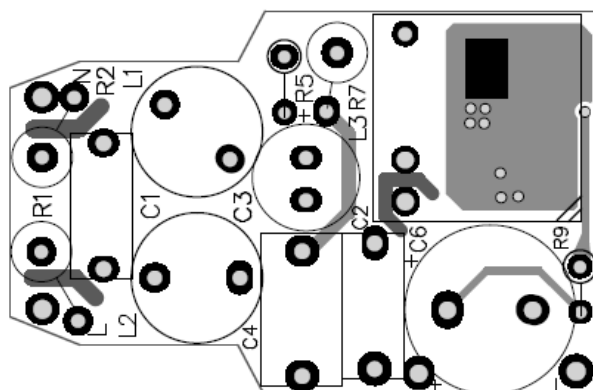


Figure 2—Top Layer

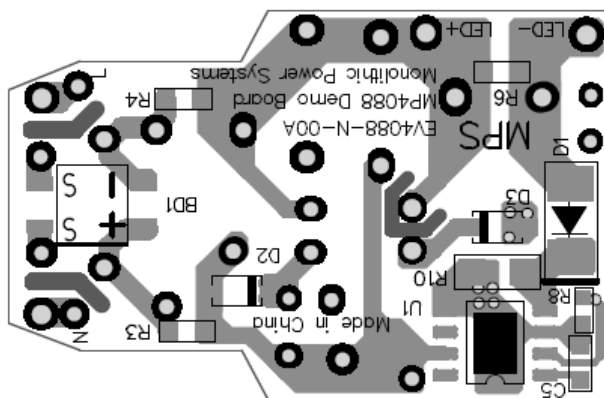


Figure 3—Bottom Layer

## CIRCUIT DESCRIPTION

The EV4088-N-00A is configured in a single-stage Buck-boost topology and gets a cost effective BOM. It also achieves high power factor and excellent TRIAC dimming performance.

R1, R2, and BD1 compose the input stage. The resistors R1, R2 are used as a passive damper of dimming. The diode rectifier BD1 rectifies the input line voltage.

L1, L2, R3, R4, C1 and C2 form a  $\pi$  EMI filter.

R5, C3, and D2 form a RCD snubber to obtain good surge test performance, the surge spike energy will be absorbed by the electrolytic cap C3.

R7, C4 are used as a bleeder which keeping the TRIAC current above the minimum holding current after leading edge dimmer turns on.

C5 is used to supply the power for MP4088. The power is charged by the internal high voltage regulator from HV pin.

R8 and R9 are used to monitor the output OVP condition. The OVP voltage is set by the divider ratio of R8 and R9.

R10 is sensing resistor for LED current control. The value of R10 sets the output LED current.


Diode D1 is the Buck-boost fly-wheel diode, the inductor L3 and the capacitor C6 are the output filter. The resistor R6 is placed as a dummy load to consume the output power in open load condition. The diode D3 is used to prevent the output current flowing back to IC when input Sine voltage drops lower than output voltage.

**EV4088-N-00A BILL OF MATERIALS**

| Qty | Ref                   | Value      | Description                               | Package      | Manufacturer            | Manufacture_P/N    |
|-----|-----------------------|------------|---|--------------|-------------------------|--------------------|
| 1   | BD1                   | MB6S       | Rectifier Bridge,<br>600V,0.5A            | SOIC-4       | Taiwan<br>Semiconductor | MB6S               |
| 1   | C1                    | 33nF/400V  | Capacitor,400V,CBB                        | DIP          | Ponasonic               | ECQE400VDC333K     |
| 1   | C2                    | 68nF/450V  | Capacitor,450V,CBB                        | DIP          | Fala                    | C222S683J30C000    |
| 1   | C3                    | 1μF/400V   | Electrolytic Capacitor,<br>400V           | DIP          | Rubycon                 | 400LLE1MEFC6.3X11  |
| 1   | C4                    | 150nF/450V | Capacitor,450V,CBB                        | DIP          | Fala                    | C222S154K30C000    |
| 1   | C5                    | 10μF/10V   | Ceramic Capacitor,<br>10V,X7R             | 0805         | Murata                  | GRM21BR71A106ME51L |
| 1   | C6                    | 100μF/80V  | Electrolytic<br>Capacitor,80V             | DIP          | YMIN                    | LK 100uF/80V       |
| 1   | D1                    | ES1J       | Diode,1A,600V                             | SMA          | TOSHIBA                 | ES1J               |
| 1   | D2                    | WSGC10MH   | Diode,1A,1000V                            | 1206         | ZOWIE                   | WSGC10MH           |
| 1   | D3                    | DSF1J      | Diode,1A,600V                             | SOD-<br>123  | SXY                     | DSF1J              |
| 2   | L1,L2                 | 4.7mH      | Inductor,4.7mH                            | DIP          | Bangdayuan              | CKL0510-472        |
| 1   | L3                    | 2.1mH      | Inductor,Φ0.23mm,<br>240 turns            | EE13         | Emei                    | FX0435             |
| 2   | R1,R2                 | 51Ω/1W     | Resistor,5%,1W                            | DIP          | Any                     | 510hm/1W           |
| 2   | R3,R4                 | 5.11kΩ     | Thick Film Chip Res,<br>1%                | 0805         | Royalohm                | 0805F5111T5E       |
| 2   | R5,R9                 | 1M/0.25W   | Resistor,0.25W                            | DIP          | Any                     | 1M/0.25W           |
| 1   | R6                    | 300kΩ      | Film Resistor,1%                          | 0805         | Yageo                   | RC0805FR-07300KL   |
| 1   | R7                    | 510Ω/1W    | Resistor,5%,1W                            | DIP          | Any                     | 510Ω/1W            |
| 1   | R8                    | 29.4kΩ     | Film Resistor,1%                          | 0603         | Yageo                   | RC0603FR-0729K4L   |
| 1   | R10                   | 1Ω         | Film Resistor,1%                          | 1206         | Yageo                   | RC1206FR-071RL     |
| 1   | U1                    | MP4088GN   | Triac-dimmable LED<br>Lighting Controller | SOIC8-<br>EP | MPS                     | MP4088GN           |
| 4   | L,N,<br>LED+,<br>LED- | 1.0 公针     |   |              |                         | 1.0 公针             |


## INDUCTOR SPECIFICATION

### Electrical Diagram

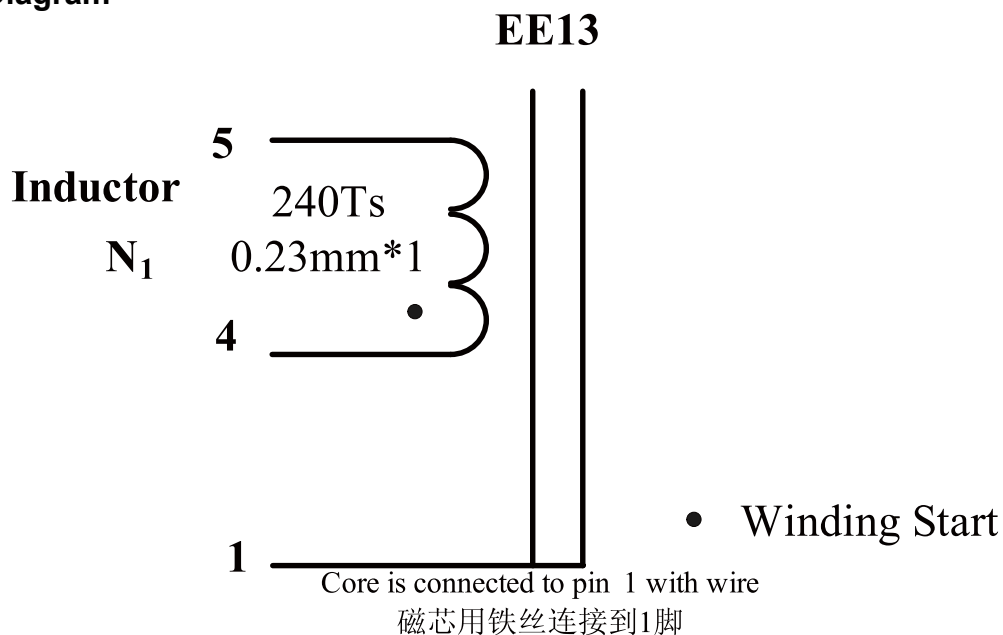

**Figure 4—Transformer Electrical Diagram**

### Winding Diagram

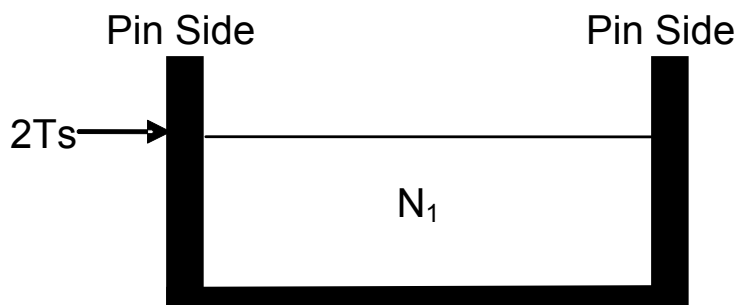

**Figure 5—Winding Diagram**

## Winding Order

| 胶带圈数<br>(Tape Layer Number) | 绕组顺序<br>(Winding No.) | 始末脚位<br>(Start & End) | 线径 $\phi$<br>(Magnet Wire) | 圈数<br>(Turns) |
|-----------------------------|-----------------------|-----------------------|----------------------------|---------------|
| 2                           | N                     | 4 —> 5                | 0.23*1                     | 240           |
|                             |                       | 磁芯(Core)—> 1          | 细铁丝(thin iron wire)        | 3             |

## Electrical Specifications

|                            |  |                |
|----------------------------|--|----------------|
| <b>Electrical Strength</b> | 60 second, 50Hz, from Winding to CORE. | 1000VAC        |
| <b>Inductance</b>          | Pins 4- 5, measured at 60kHz, 0.1 VRMS | 2.1mH $\pm$ 5% |

## Materials

| Item | Description  |
|------|--|
| 1    | Core: EE13, PC40   |
| 2    | Bobbin: EE13, 5+5PIN RMMOVE PIN 2,3,6,7,8,9,10                   |
| 3    | Wire: $\Phi$ 0.23mm, 2UEW, CLASS F or equivalent, thin iron wire |
| 4    | Tape: 6.5mm(W) $\times$ 0.06mm(TH)                               |
| 5    | Varnish: JOHN C. DOLPH CO, BC-346A or equivalent                 |
| 6    | Solder Bar: CHEN NAN: SN99.5/Cu0.5 or equivalent                 |

## EVB TEST RESULTS

### Performance Data

#### Efficiency, PF and THD

| f (Hz) | Vin(V) | Pin(W) | Vo(V) | Io(mA) | Po(W) | Efficiency(%) | PF    | THD(%) |
|--------|--------|--------|-------|--------|-------|---------------|-------|--------|
| 50     | 198    | 8.74   | 61.20 | 118    | 7.22  | 82.63         | 0.874 | 37.50  |
|        | 210    | 9.02   | 61.30 | 122    | 7.48  | 82.91         | 0.855 | 40.20  |
|        | 220    | 9.18   | 61.40 | 124    | 7.61  | 82.94         | 0.839 | 42.70  |
|        | 230    | 9.43   | 61.50 | 127    | 7.81  | 82.83         | 0.824 | 44.30  |
|        | 240    | 9.62   | 61.60 | 129    | 7.95  | 82.60         | 0.808 | 46.80  |
|        | 250    | 9.80   | 61.70 | 131    | 8.08  | 82.48         | 0.792 | 48.10  |
|        | 260    | 9.98   | 61.80 | 133    | 8.22  | 82.36         | 0.777 | 49.80  |
|        | 265    | 10.05  | 61.80 | 135    | 8.34  | 83.01         | 0.769 | 50.30  |

#### Dimming Compatibility (No Flicker with these 36 different Dimmers)

| Dimmer No. | Manufacturer | Part No.    | Power Stage | DimmingType | Imax mA) | Imin (mA) |
|------------|--------------|-------------|-------------|-------------|----------|-----------|
| 1          | MIKA         | 433/4       | 60-400W     | Leading     | 121.4    | 44        |
| 2          | Busch        | 2250U       | 600W        | Leading     | 129      | 23.1      |
| 3          | Berker       | 283010      | 60-400W     | Leading     | 128.3    | 32.1      |
| 4          | JUNG         | 225 NV DE   | 20-500W/VA  | Leading     | 124.9    | 13.2      |
| 5          | Berker       | 286610      | 20-500W     | Leading     | 126.9    | 26.8      |
| 6          | EMC          | PROP400U    | 40-400W     | Leading     | 121.5    | 22.2      |
| 7          | Busch        | 2247U       | 500W/VA     | Leading     | 126      | 26.7      |
| 8          | Busch        | 2200..      | 60-400W     | Leading     | 127.6    | 37.8      |
| 9          | JUNG         | 225 NV DE   | 20-500W/VA  | Leading     | 127      | 25.74     |
| 10         | JUNG         | 266 GDE     | 60-600W     | Leading     | 127.9    | 26.84     |
| 11         | Berker       | 2875        | 60-600W     | Leading     | 128.1    | 23.9      |
| 12         | Berker       | 2819        | 60-400W     | Leading     | 124.8    | 51        |
| 13         | MIKA         | 433         | 60-300      | Leading     | 122.3    | 44.3      |
| 14         | GIRA         | 0300 00/I01 | 60-400W     | Leading     | 125      | 48.3      |
| 15         | TELLER       | 40600RL     | 40-600W     | Leading     | 121.8    | 28.55     |
| 16         | LONON        | 1380000101  | 630W        | Leading     | 131.8    | 19.26     |
| 17         | TCL          | L2.0        | 630W        | Leading     | 135.7    | 25.7      |
| 18         | TCL          | K9051       | 630W        | Leading     | 135.4    | 16.4      |
| 19         | 松本电工         | SONGBEN     | 630W        | Leading     | 133.4    | 0         |
| 20         | VANKON       | VANKON      | 300W        | Leading     | 135.1    | 31.2      |
| 21         | ANAM         | ANAM        | 16A/250V    | Leading     | 132.9    | 50        |
| 22         | TCL          | L2.0        | 630W        | Leading     | 135      | 5.3       |
| 23         | SR           | SKD-500     | 500W        | Leading     | 133.4    | 35        |
| 24         | LUMEO ECO    | T46.03      | 15-150W     | Trailing    | 124.9    | 54.5      |
| 25         | MIKA         | 433HAB      | 20-315W     | Trailing    | 124.8    | 45.1      |
| 26         | JUNG         | 254 UDIE 1  | 50-420W/VA  | Trailing    | 128.5    | 56.5      |
| 27         | Berker       | 286110      | 50-420W     | Trailing    | 128.6    | 57.2      |
| 28         | MIKA         | 433 HAB     | 20-315W     | Trailing    | 130.3    | 42        |
| 29         | MIKA?        | EIM-585     | 20-300W     | Trailing    | 121.7    | 11        |



**Dimming Compatibility (No Flicker with these 36 different Dimmers) (continued)**

| Dimmer No. | Manufacturer | Part No.   | Power Stage | DimmingType | I <sub>max</sub> mA) | I <sub>min</sub> (mA) |
|------------|--------------|------------|-------------|-------------|----------------------|-----------------------|
| 30         | Busch        | 6591U-101  | 420W/VA     | Trailing    | 121                  | 11                    |
| 31         | Busch        | 6519U      | 550W/VA     | Trailing    | 131.3                | 51                    |
| 32         | JUNG         | 225 TDE    | 20-525W     | Trailing    | 129.6                | 42.1                  |
| 33         | SIEMENS      | 5TC8 284   | 20-600W     | Trailing    | 130.8                | 46.3                  |
| 34         | Busch        | 6513 U-102 | 420W/VA     | Trailing    | 132.4                | 51.9                  |
| 35         | LICHTREGLER  | T46s       | 20~315W     | Trailing    | 129.3                | 48.8                  |
| 36         | Grundtyp     | ET1_53850  | 25~300W     | Trailing    | 126.7                | 26.2                  |

**Electric Strength Test**

Input and output was shorted respectively. 3750VAC/50Hz sine wave applied between input and output for 1min, and operation was verified.

**Surge Test**


Line to Line 500V surge testing was completed according to IEC61547.

Input voltage was set at 230VAC/50Hz. Output was loaded at full load and operation was verified following each surge event.


| Surge Level (V) | Input Voltage (VAC) | Injection Location | Injection Phase (°) | Test Result (Pass/Fail) |
|-----------------|---------------------|--------------------|---------------------|-------------------------|
| 500             | 230                 | L to N             | 90                  | Pass                    |
| -500            | 230                 | L to N             | 270                 | Pass                    |

## Thermal Test


Test without dimmer and with dimmer

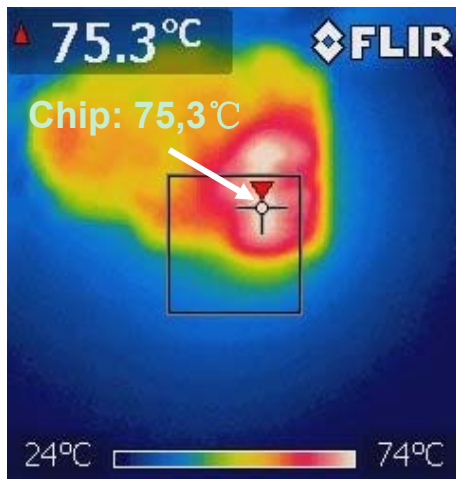


Without dimmer

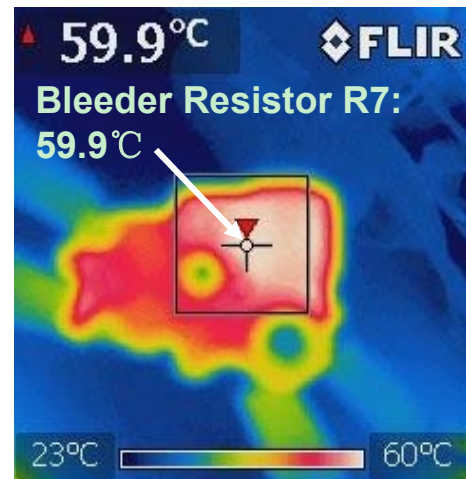

Without dimmer

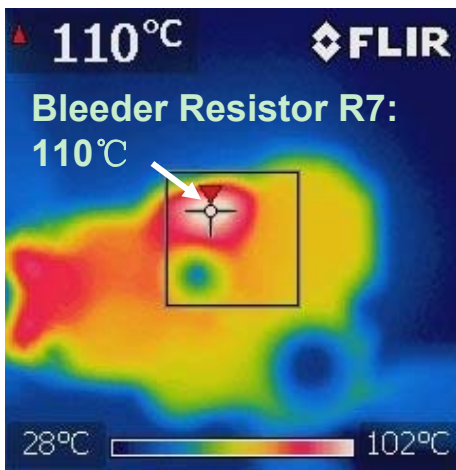

Leading edge dimmer at 50% dimming on phase

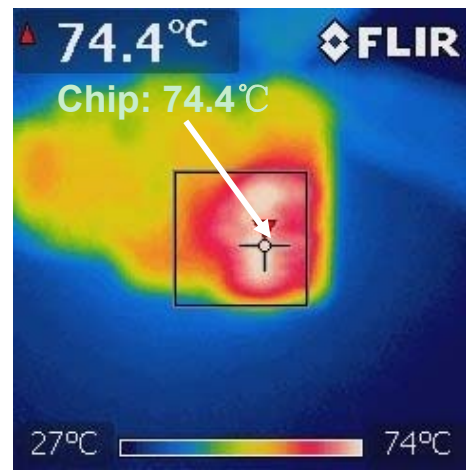

Trailing edge dimmer at Max dimming on phase


## EVB TEST RESULTS

Performance waveforms are tested on the evaluation board.

$V_{IN}=230V_{AC}/50Hz$ , 19 LEDs in series,  $I_{LED}=135mA$ ,  $V_{OUT}=60V$ .


### Line Regulation

$V_{IN}=(198-265)V_{AC}/50Hz$ , Full Load

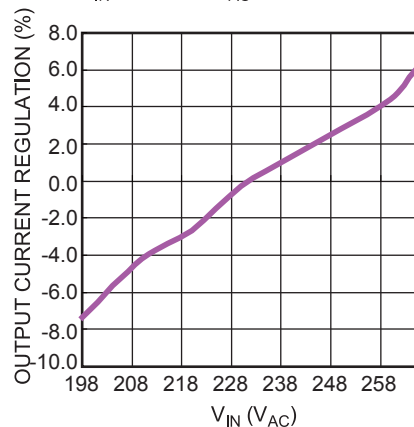


### Efficiency vs. $V_{IN}$

$V_{IN}=(198-265)V_{AC}/50Hz$ , Full Load

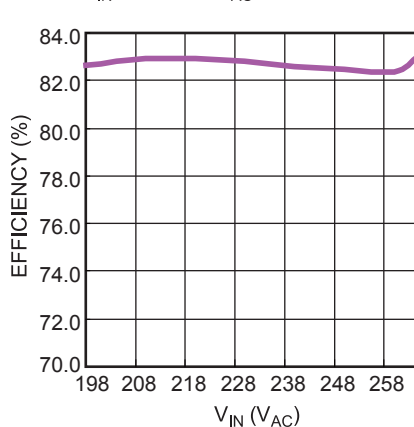


### PF vs. $V_{IN}$

$V_{IN}=(198-265)V_{AC}/50Hz$ , Full Load

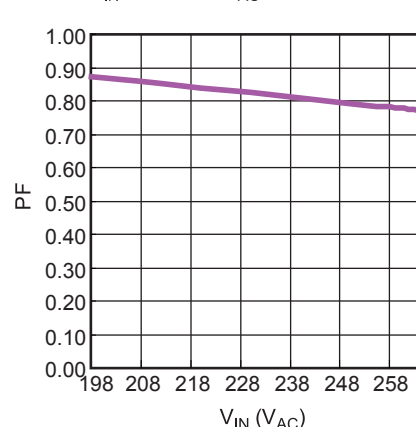


### THD vs. $V_{IN}$

$V_{IN}=(198-265)V_{AC}/50Hz$ , Full Load

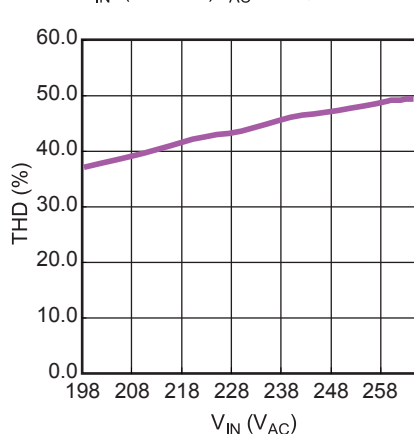


### Dimming Curve

$V_{IN}=230V_{AC}/50Hz$ , Full Load

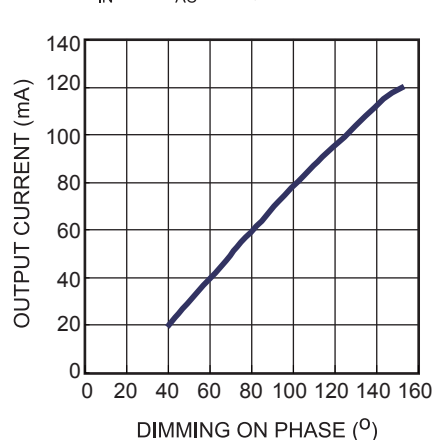


### Conducted EMI, L-Line

$V_{IN}=230V_{AC}/50Hz$ , Full Load,  
RBW=9kHz, MT=20ms

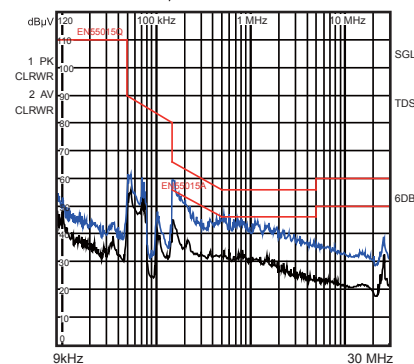


### Conducted EMI, N-Line

$V_{IN}=230V_{AC}/50Hz$ , Full Load,  
RBW=9kHz, MT=20ms

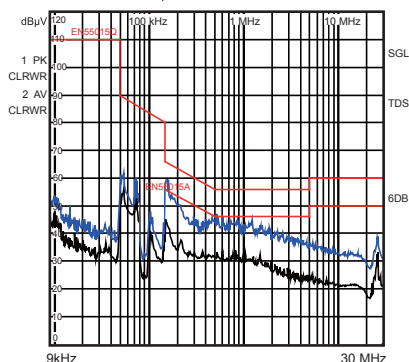

### CDN Test

$V_{IN}=230V_{AC}/50Hz$ , Full Load,  
RBW=120kHz, MT=1ms

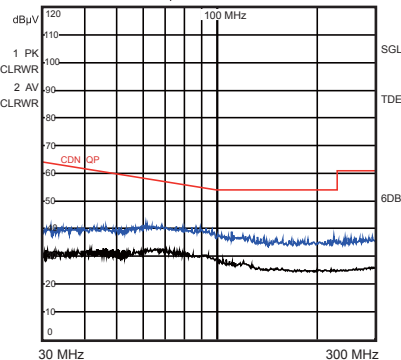


## EVB TEST RESULTS (continued)

Performance waveforms are tested on the evaluation board.

$V_{IN}=230V_{AC}/50Hz$ , 19 LEDs in series,  $I_{LED}=135mA$ ,  $V_{OUT}=60V$ .


### Steady State

$V_{IN}=230V_{AC}/50Hz$ , Full Load

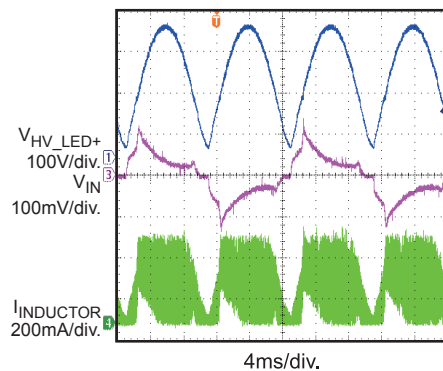


### Steady State

$V_{IN}=230V_{AC}/50Hz$ , Full Load

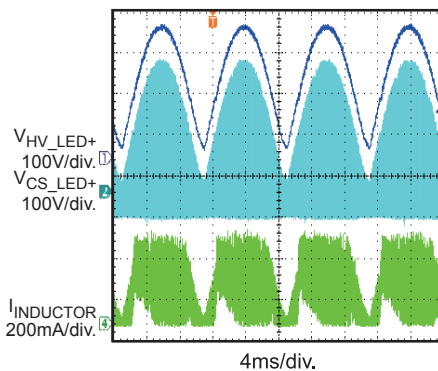


### Steady State

$V_{IN}=230V_{AC}/50Hz$ , Full Load

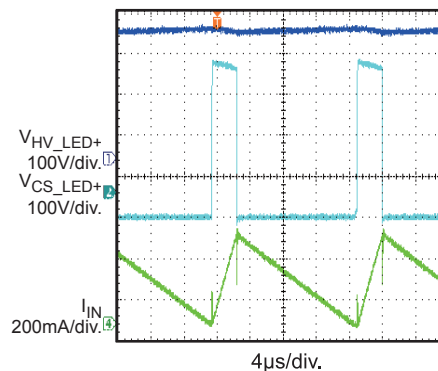


### $V_{IN}$ Start-Up

$V_{IN}=230V_{AC}/50Hz$ , Full Load

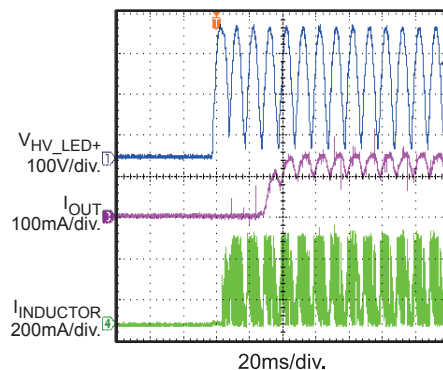


### $V_{IN}$ Shutdown

$V_{IN}=230V_{AC}/50Hz$ , Full Load

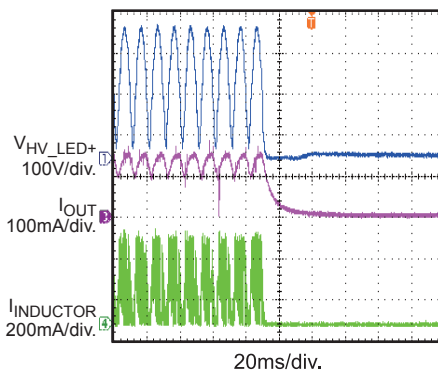


### Dimming Performance

Max Dimming on Phase  
with Leading-Edge Dimmer  
 $V_{IN}=230V_{AC}/50Hz$

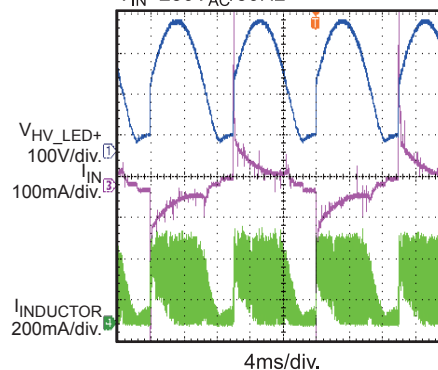


### Dimming Performance

Min Dimming on Phase  
with Leading-Edge Dimmer  
 $V_{IN}=230V_{AC}/50Hz$

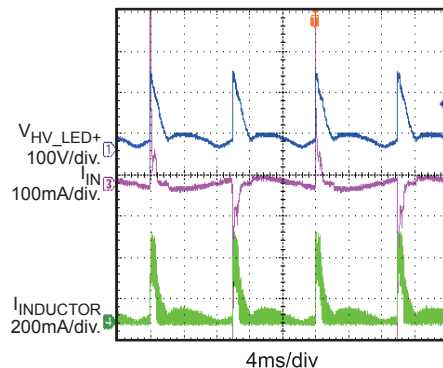


### Dimming Performance

Max Dimming on Phase  
with Trailing-Edge Dimmer  
 $V_{IN}=230V_{AC}/50Hz$

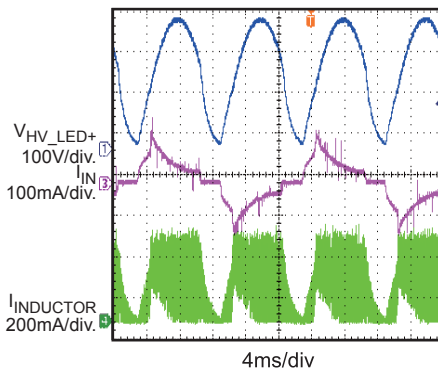

### Dimming Performance


Min Dimming on Phase  
with Trailing-Edge Dimmer  
 $V_{IN}=230V_{AC}/50Hz$

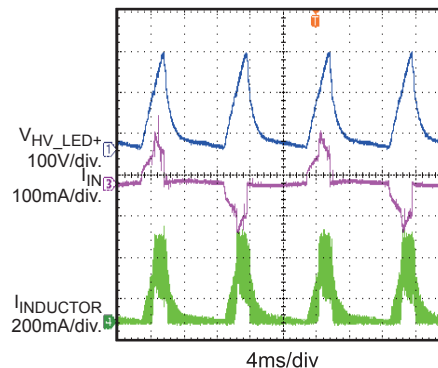

## EVb TEST RESULTS *(continued)*

Performance waveforms are tested on the evaluation board.

$V_{IN}=230V_{AC}/50Hz$ , 19 LEDs in series,  $I_{LED}=135mA$ ,  $V_{OUT}=60V$ .

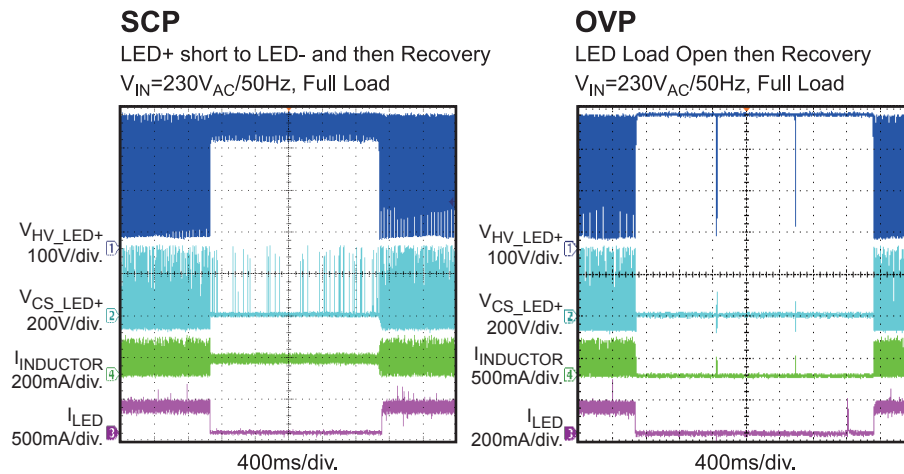

## QUICK START GUIDE

1. Preset AC Power Supply to  $198\text{VAC} \leq V_{\text{IN}} \leq 265\text{VAC}$ .
2. Turn Power Supply off.
3. Connect the LED string between “LED+” (anode of LED string) and “LED-” (cathode of LED string).
4. Connect Power Supply terminals to AC  $V_{\text{IN}}$  terminals (“L” and “N”) as shown on the board.
5. Turn AC Power Supply on after making connections.

**NOTICE:** The information in this document is subject to change without notice. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Monolithic Power Systems \(MPS\):](#)

[EV4088-N-00A](#)