



EVBL4473-L-00A

3.5A, 36V, High-Efficiency, Fast Transient Response, Step-Down Converter Evaluation Board

DESCRIPTION

The EVBL4473-L-00A evaluation board is designed to demonstrate the capabilities of the MP/MPQ4473, a high-efficiency, step-down regulator that features an MPS power inductor and integrated power MOSFETs.

The MP/MPQ4473 offers a very compact solution to achieve 3.5A of continuous output current (I_{OUT}) with excellent load and line regulation across a wide input supply range. It also provides fast transient response and good stability across a wide input supply and load range.

The EVBL4473-L-00A is a fully assembled and tested evaluation board. It generates a 3.3V output voltage (V_{OUT}) at load currents up to 3.5A across a 4.5V to 36V input voltage (V_{IN}) range. The switching frequency (f_{SW}) is set to 500kHz.

The MP/MPQ4473 is available in a QFN-20 (3mmx4mm) package.

ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Value	Units
Input voltage	V_{IN}	4.5 to 36	V
Output voltage	V_{OUT}	3.3	V
Output current	I_{OUT}	3.5	A

FEATURES

- Wide 4.5V to 36V Operating Input Voltage (V_{IN}) Range
- Up to 3.5A Continuous Output Current (I_{OUT})
- Internal 40m Ω High-Side, 20m Ω Low-Side Power MOSFETs
- Proprietary Switching Loss Reduction Technology
- 1% Reference Voltage (V_{REF})
- Configurable Soft-Start Time (t_{SS})
- Low-Dropout Mode
- Short-Circuit Protection (SCP), Over-Current Protection (OCP), Over-Voltage Protection (OVP), Under-Voltage Protection (UVP), and Thermal Shutdown
- MPS Power Inductor

 **Optimized Performance with MPS Inductor MPL-AL6050 Series**

APPLICATIONS

- Notebook Systems and I/O Power
- Automotive Systems
- Networking Systems
- Industrial Supplies
- Optical Communications Systems
- Distributed Power and Point-of-Load (POL) Systems

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

EVBL4473-L-00A EVALUATION BOARD




LxWxH (6.4cmx6.4cmx1.0cm)

Board Number	MPS IC Number
EVBL4473-L-00A	MP/MPQ4473GL

Efficiency vs. Load Current vs. Power Loss

$V_{OUT} = 3.3V$

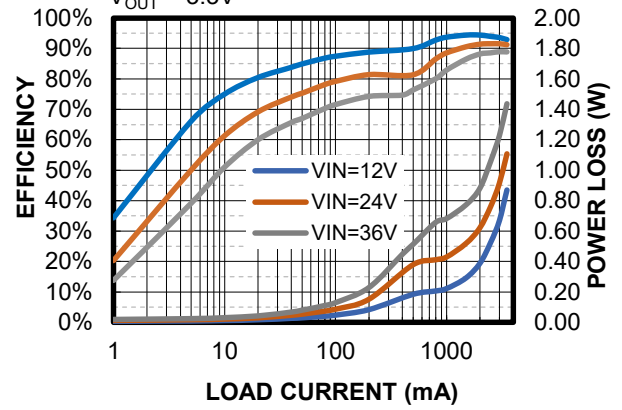

QUICK START GUIDE

1. Preset the power supply output between 4.5V and 36V, then turn off the power supply.
2. Connect the load terminals to:
 - a. Positive (+): VOUT
 - b. Negative (-): GND
3. Connect the power supply terminals to:
 - a. Positive (+): VIN
 - b. Negative (-): GND
4. After making the connections, turn on the power supply. The board should start up automatically.
5. Apply a digital input to the EN pin to use the enable function. Drive EN above 1.25V to turn the regulator on; drive EN below 0.86V to turn it off.
6. Add the resistor dividers, R5 and R8, to use the under-voltage lockout (UVLO) function. Calculate the V_{IN} UVLO threshold with Equation (1):

$$0.86 \times \left(1 + \frac{R5}{R8} \right) \quad (1)$$

Where the falling edge EN threshold is 0.86V.

7. Set the output voltage (V_{OUT}) using R1 and R2, where $V_{FB} = 0.815V$ and $R2 = 10k\Omega$. Calculate R1 with Equation (2): ⁽¹⁾

$$R1 = 12.27 \times (V_{OUT} - 0.815)(k\Omega) \quad (2)$$

Note:

- 1) Refer to the Application Information section in the MP/MPQ4473 datasheet to recalculate the compensation, inductor, and output capacitor values when V_{OUT} is changed.

EVALUATION BOARD SCHEMATIC

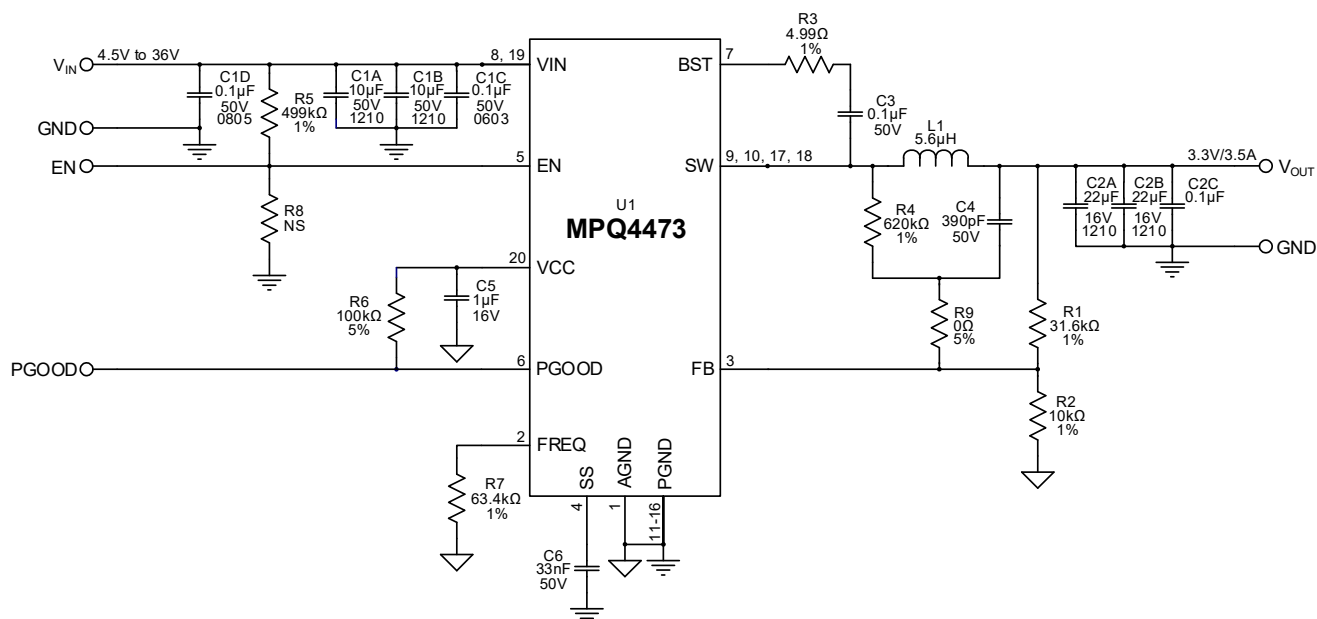


Figure 1: Evaluation Board Schematic


EVBL4473-L-00A BILL OF MATERIALS

Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer PN
2	C1A, C1B	10 μ F	Ceramic capacitor, 50V, X7R	1210	Murata	GRM32ER71H106KA12L
3	C1C, C2C, C3	0.1 μ F	Ceramic capacitor, 50V, X7R	0603	TDK	C1005X7R1C104K
1	C1D	0.1 μ F	Ceramic capacitor, 50V, X7R	0805	Murata	GRM21BR72A104KAC4L
2	C2A, C2B	22 μ F	Ceramic capacitor, 16V, X7R	1210	Murata	GRM32ER71C226KE79
1	C4	390pF	Ceramic capacitor, 50V, C0G	0603	Murata	GRM1885C1H391JA01D
1	C5	1 μ F	Ceramic capacitor, 16V, X7R	0603	Murata	GRM188R71C105KA12D
1	C6	33nF	Ceramic capacitor, 50V, X7R	0603	Murata	GRM188R71H333KA61D
1	R1	31.6k Ω	Film resistor, 1%	0603	Yageo	RC0603FR-0731K6L
1	R2	10k Ω	Film resistor, 1%	0603	Yageo	RC0603FR-0710KL
1	R3	4.99 Ω	Film resistor, 1%	0603	Yageo	RC0603FR-074R99L
1	R4	620k Ω	Film resistor, 1%	0603	Yageo	RC0603FR-07620KL
1	R5	499k Ω	Film resistor, 1%	0603	Yageo	RC0603FR-07499KL
1	R6	100k Ω	Film resistor, 5%	0603	Yageo	RC0603FR-07100KL
1	R7	63.4k Ω	Film resistor, 1%	0603	Yageo	RC0603FR-0763K4L
1	R9	0 Ω	Film resistor, 5%	0603	Yageo	RC0603FR-070RL
0	R8	NS				
1	L1	5.6 μ H	Inductor, DCR = 14m Ω , I _{SAT} = 9.5A	SMD (6mmx 6.4mmx 4.8mm)	MPS	MPL-AL6050-5R6
1	U1	MP4473	3.5A, 36V step-down regulator	QFN-20 (3mmx 4mm)	MPS	MP4473GL


EVB TEST RESULTS

Performance waveforms are tested on the evaluation board. $V_{IN} = 24V$, $V_{OUT} = 3.3V$, $T_A = 25^\circ C$, unless otherwise noted.


Efficiency vs. Load Current vs. Power Loss

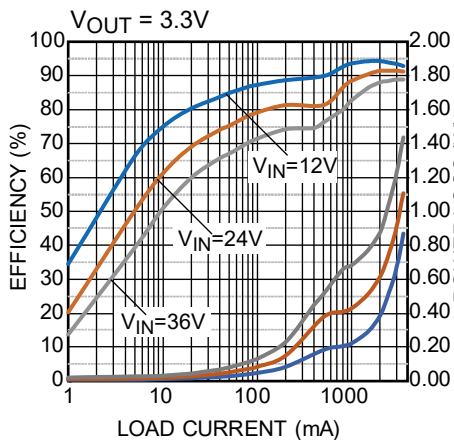


Case Temperature Rise vs. Output Current

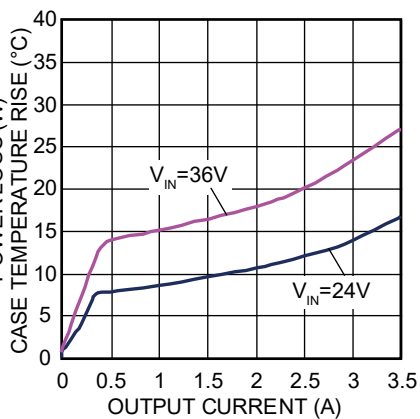


f_{SW} vs. Output Current

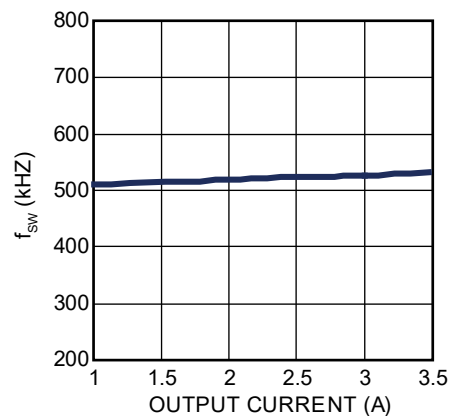


f_{SW} vs. V_{IN}

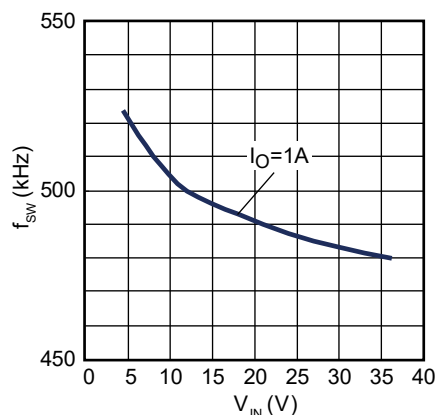

Line Regulation

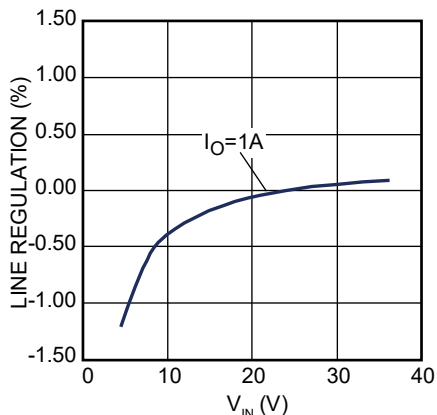


Load Regulation

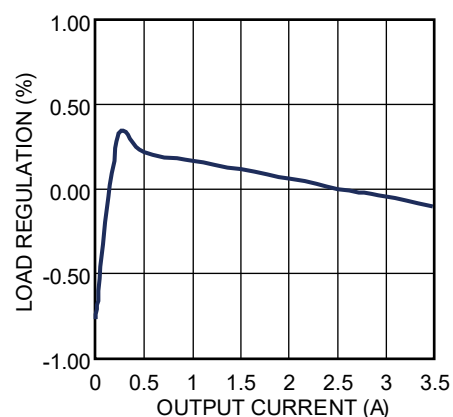


EVB TEST RESULTS (continued)

Performance waveforms are tested on the evaluation board. $V_{IN} = 24V$, $V_{OUT} = 3.3V$, $T_A = 25^\circ C$, unless otherwise noted.


Output Voltage Ripple

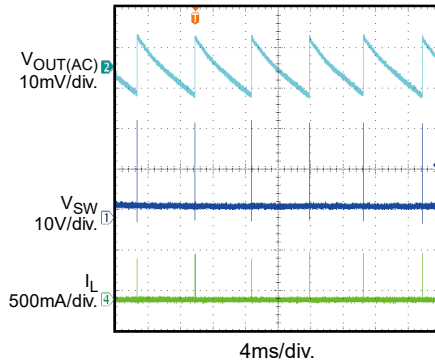 $I_{OUT} = 0A$


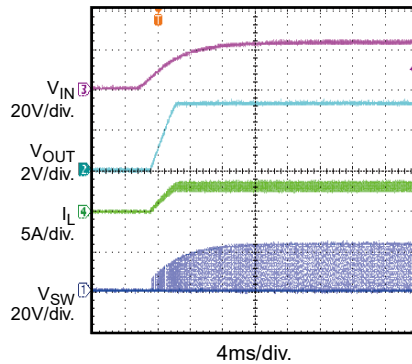
Output Voltage Ripple

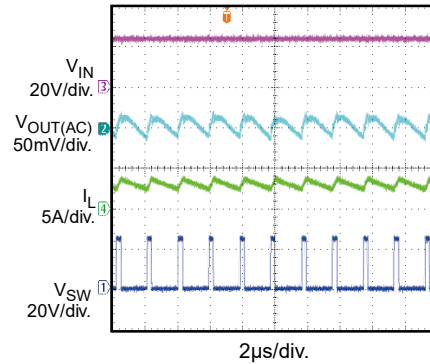 $I_{OUT} = 3A$


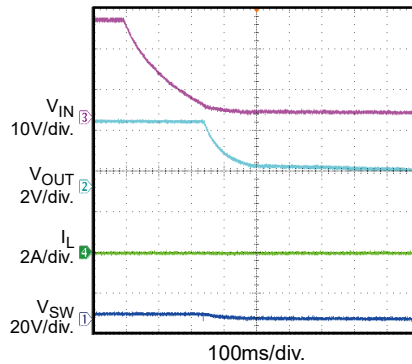
Start-Up through VIN

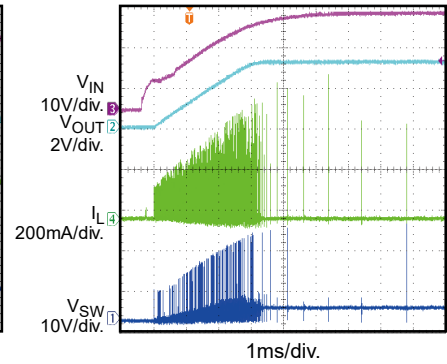 $I_{OUT} = 0A$


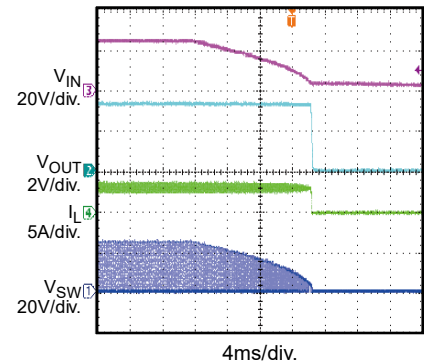
Start-Up through VIN

 $I_{OUT} = 3A$


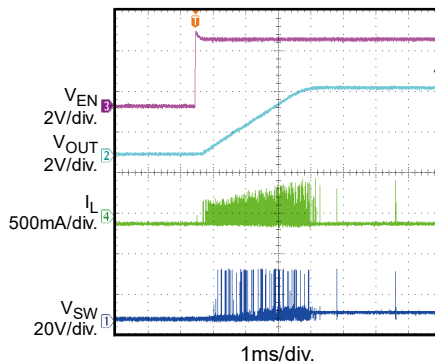
Shutdown through VIN

 $I_{OUT} = 0A$


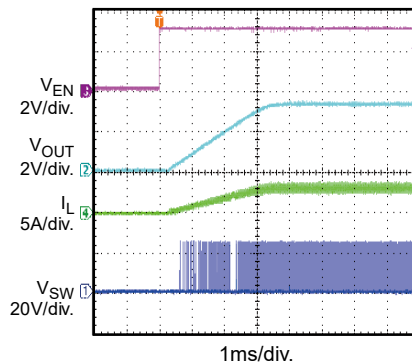
Shutdown through VIN

 $I_{OUT} = 3A$


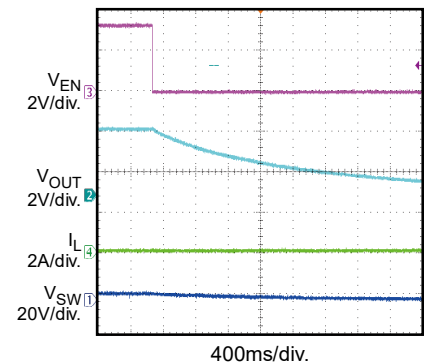
Start-Up through EN

 $I_{OUT} = 0A$


Start-Up through EN










 $I_{OUT} = 3A$


Shutdown through EN

 $I_{OUT} = 0A$


EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the evaluation board. $V_{IN} = 24V$, $V_{OUT} = 3.3V$, $T_A = 25^{\circ}C$, unless otherwise noted.

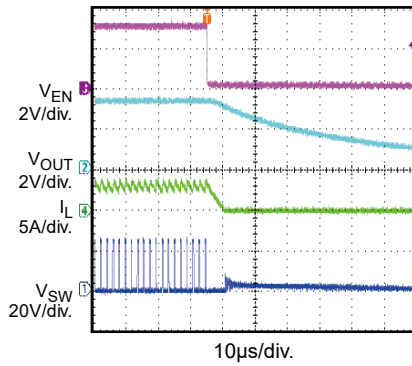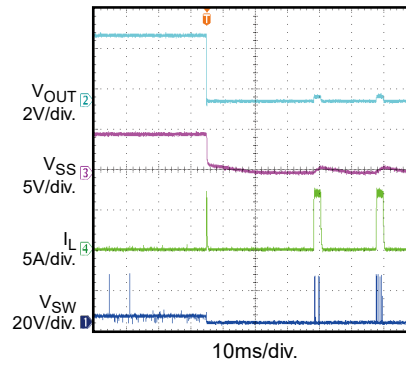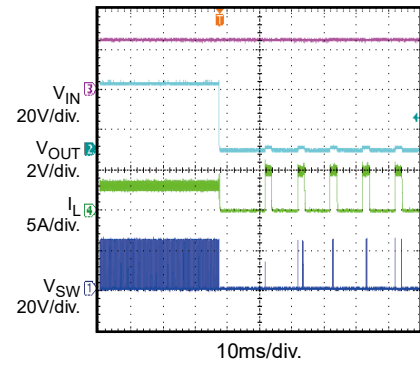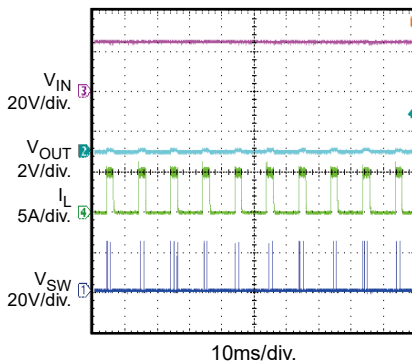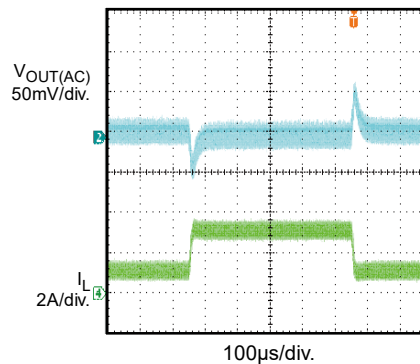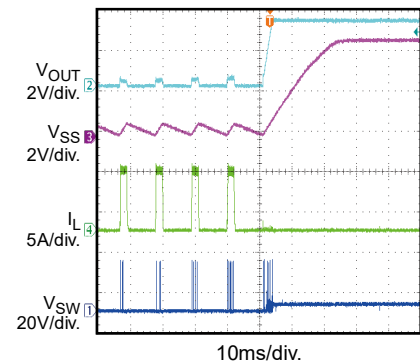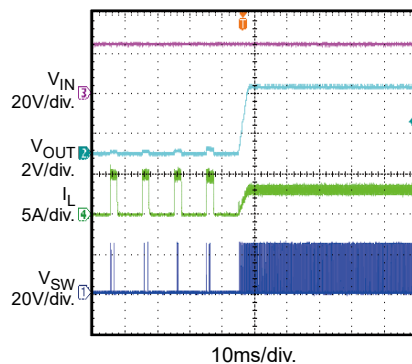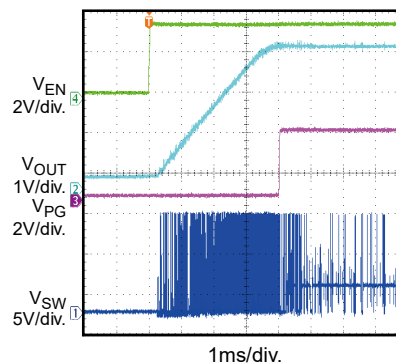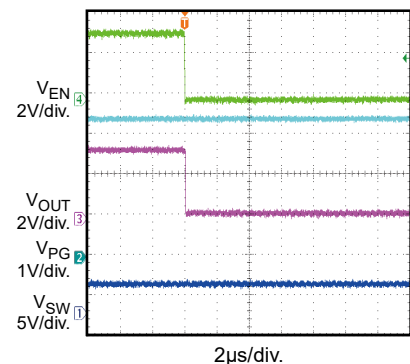Shutdown through EN
 $I_{OUT} = 3A$

Short Circuit Entry
 $I_{OUT} = 0A$

Short Circuit Entry
 $I_{OUT} = 3A$

Short Circuit Steady State

Load Transient
 $I_{OUT} = 1A \text{ to } 3A$

Short Circuit Recovery
 $I_{OUT} = 0A$

Short Circuit Recovery
 $I_{OUT} = 3A$

Power Good in Start-Up through EN

Power Good in Shutdown through EN


PCB LAYOUT

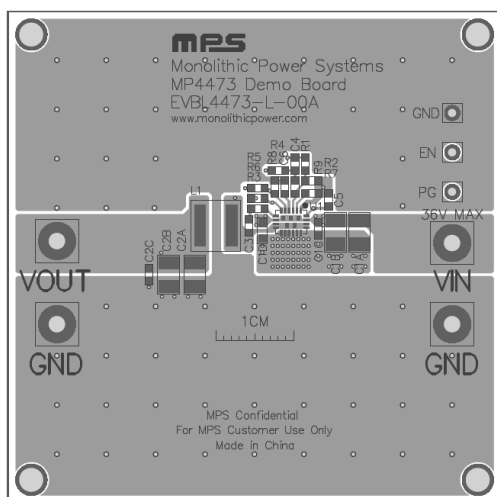


Figure 2: Top Silk

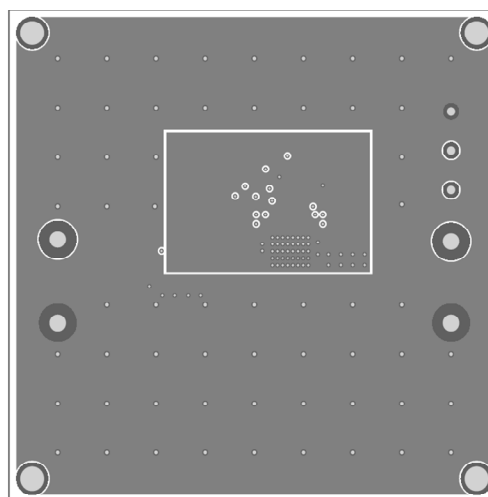


Figure 3: Mid-Layer 1

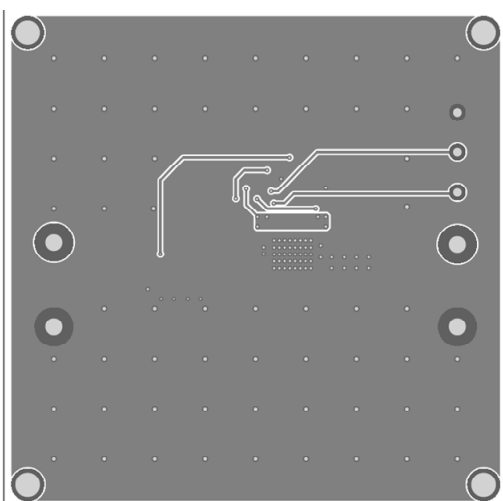


Figure 4: Mid-Layer 2

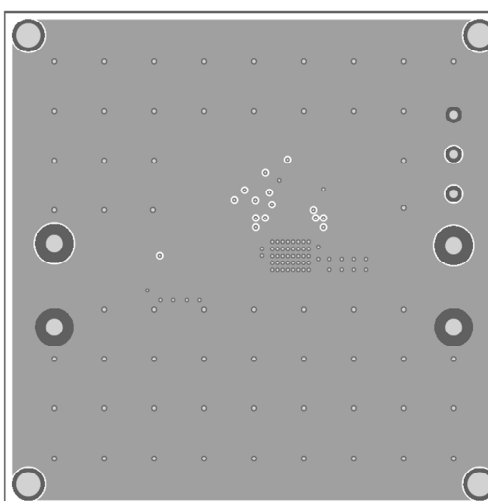


Figure 5: Bottom Layer

REVISION HISTORY

Revision #	Revision Date	Description	Pages Updated
1.0	4/11/2022	Initial Release	-

Notice: The information in this document is subject to change without notice. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Monolithic Power Systems \(MPS\):](#)

[EVBL4473-L-00A](#)