

IAS1-ADPTR-DM3D2-GEVB

Demo3 IAS Adapter User's Manual

EVBUM2759/D


Demo3 IAS Adapter Board Overview

IAS1-ADPTR-DM3D2-GEVB adapter board is created to support the evaluation of IAS modules on the DEMO3 evaluation baseboard. Since the IAS eco-system consists of modules with various image sensors from **onsemi**, and may have different pin definition, the adapter board needs to be configured before power-on according to the sensor (module) that is plugged in. This document describes the necessary steps required for the initial configuration. Please refer to the module datasheet and IAS1-ADPTR-DM3D2-GEVB board schematics for a more comprehensive use of the IAS adapter that is not covered in this document.

Output Voltage

Before powering on the board, please refer to the respective module datasheet in order to understand the supply voltages as well as the module pin assignment. Make sure to read through this guide before powering on the IAS-ADPTR-M3D2-GEVB adapter board. Refer to Figure 1 for the location of the jumpers used to configure the power supplies.

BOARD PHOTO

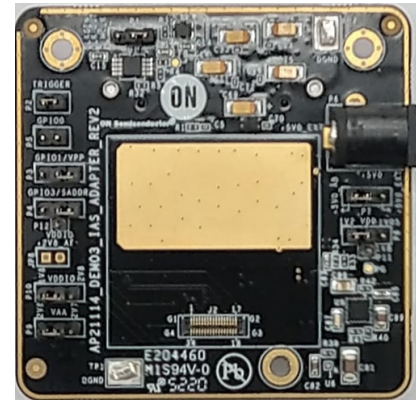

Power Supplies

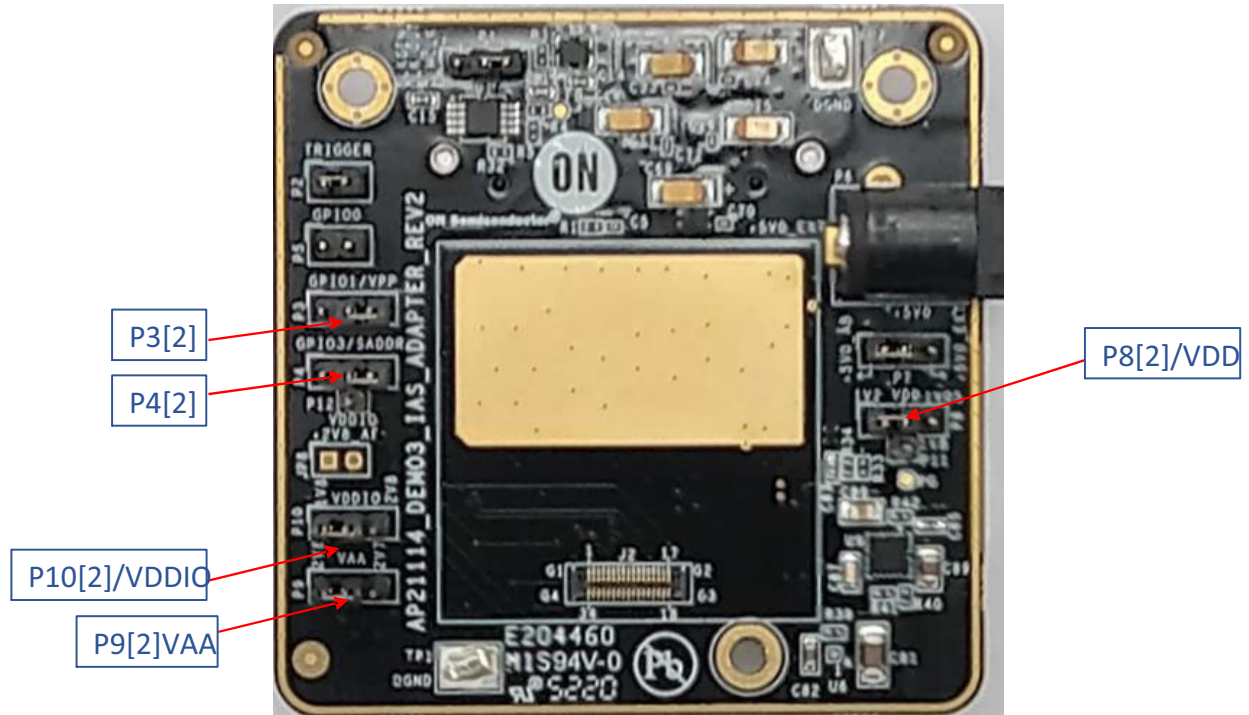


Figure 1. Demo3 IAS Adapter Board

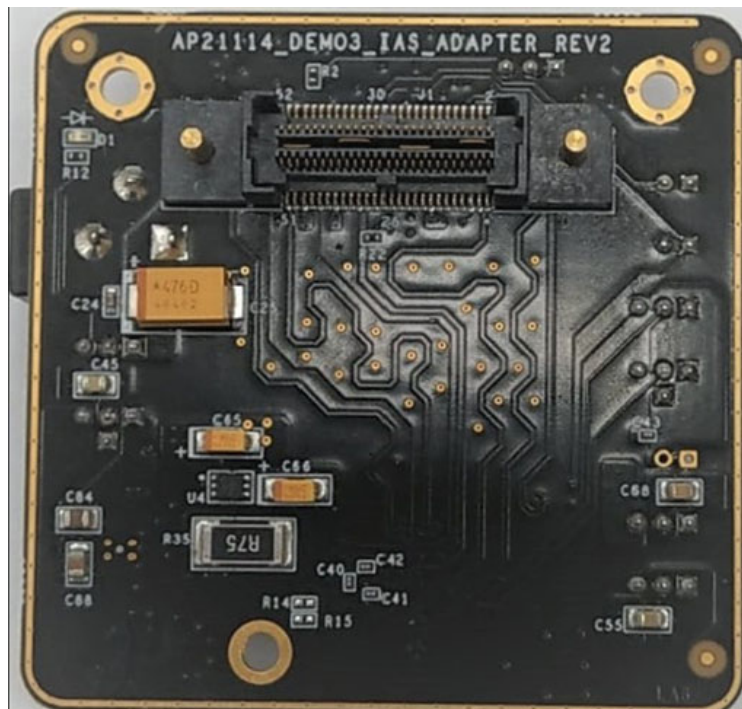


Figure 2.

1. VDD: P8 is used to configure VDD supply for the IAS modules.
 - ◆ For 1.2 V VDD: Connect P8[2] (pin 2 of P8) to P8[1] (1V2)
 - ◆ For 1.05 V VDD: Connect P8[2] to P8[3] (1V05)
 - ◆ For 1.8 V VDD: Connect P8[2] to P11 (1V8)
2. VAA: P9 is used to configure VAA supply.
 - ◆ For 2.7 V VAA: Connect P9[2] to P9[3] (2V7)
 - ◆ For 2.8 V VAA: Connect P9[2] to P9[1] (2V8)
3. VDDIO: P10 is used to configure VDDIO supply.
 - ◆ For 1.8 V VDDIO: Connect P10[2] to P10[1]
- ◆ For 2.8V VDDIO: Connect P10[2] to P10[3]
4. P4[2] is connected to pin 34 of the IAS module.

Please refer to the respective module datasheet for pin definition.
- ◆ VDD_AF: P4[1] provides 2.8 V supply for VDD_AF.
- ◆ SADDR:
 - ◆ To ground SADDR, connect P4[2] to P4[3]
 - ◆ To connect SADDR to VDDIO, connect P4[2] to P12 (VDDIO)
- ◆ GPI3: Connect based on the defined use case for GPI3.
5. P3[2] is connected to pin1 of the IAS module.

Please refer to the respective module datasheet for pin definition.
- ◆ VDD_AF: P3[1] provides 2.8 V supply for VDD_AF.
- ◆ GPIO1: Please connect accordingly based on the defined use case for GPIO1
- ◆ VPP: Connect according to sensor Datasheet.

onsemi, **onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

The evaluation board/kit (research and development board/kit) (hereinafter the "board") is not a finished product and is not available for sale to consumers. The board is only intended for research, development, demonstration and evaluation purposes and will only be used in laboratory/development areas by persons with an engineering/technical training and familiar with the risks associated with handling electrical/mechanical components, systems and subsystems. This person assumes full responsibility/liability for proper and safe handling. Any other use, resale or redistribution for any other purpose is strictly prohibited.

THE BOARD IS PROVIDED BY ONSEMI TO YOU "AS IS" AND WITHOUT ANY REPRESENTATIONS OR WARRANTIES WHATSOEVER. WITHOUT LIMITING THE FOREGOING, ONSEMI (AND ITS LICENSORS/SUPPLIERS) HEREBY DISCLAIMS ANY AND ALL REPRESENTATIONS AND WARRANTIES IN RELATION TO THE BOARD, ANY MODIFICATIONS, OR THIS AGREEMENT, WHETHER EXPRESS, IMPLIED, STATUTORY OR OTHERWISE, INCLUDING WITHOUT LIMITATION ANY AND ALL REPRESENTATIONS AND WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, AND THOSE ARISING FROM A COURSE OF DEALING, TRADE USAGE, TRADE CUSTOM OR TRADE PRACTICE.

onsemi reserves the right to make changes without further notice to any board.

You are responsible for determining whether the board will be suitable for your intended use or application or will achieve your intended results. Prior to using or distributing any systems that have been evaluated, designed or tested using the board, you agree to test and validate your design to confirm the functionality for your application. Any technical, applications or design information or advice, quality characterization, reliability data or other services provided by **onsemi** shall not constitute any representation or warranty by **onsemi**, and no additional obligations or liabilities shall arise from **onsemi** having provided such information or services.

onsemi products including the boards are not designed, intended, or authorized for use in life support systems, or any FDA Class 3 medical devices or medical devices with a similar or equivalent classification in a foreign jurisdiction, or any devices intended for implantation in the human body. You agree to indemnify, defend and hold harmless **onsemi**, its directors, officers, employees, representatives, agents, subsidiaries, affiliates, distributors, and assigns, against any and all liabilities, losses, costs, damages, judgments, and expenses, arising out of any claim, demand, investigation, lawsuit, regulatory action or cause of action arising out of or associated with any unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of any products and/or the board.

This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the technical requirements of these or other related directives.

FCC WARNING – This evaluation board/kit is intended for use for engineering development, demonstration, or evaluation purposes only and is not considered by **onsemi** to be a finished end product fit for general consumer use. It may generate, use, or radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment may cause interference with radio communications, in which case the user shall be responsible, at its expense, to take whatever measures may be required to correct this interference.

onsemi does not convey any license under its patent rights nor the rights of others.

LIMITATIONS OF LIABILITY: **onsemi** shall not be liable for any special, consequential, incidental, indirect or punitive damages, including, but not limited to the costs of requalification, delay, loss of profits or goodwill, arising out of or in connection with the board, even if **onsemi** is advised of the possibility of such damages. In no event shall **onsemi**'s aggregate liability from any obligation arising out of or in connection with the board, under any theory of liability, exceed the purchase price paid for the board, if any.

The board is provided to you subject to the license and other terms per **onsemi**'s standard terms and conditions of sale. For more information and documentation, please visit www.onsemi.com.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[onsemi:](#)

[IAS1-ADPTR-DM3D1-GEVB](#)