



ON Semiconductor®

Test Procedure for the NCP1566 12-V/6-A Dc-Dc Converter


Christophe Basso

April 17th 2019

Rev. 1



Board Electrical Schematic

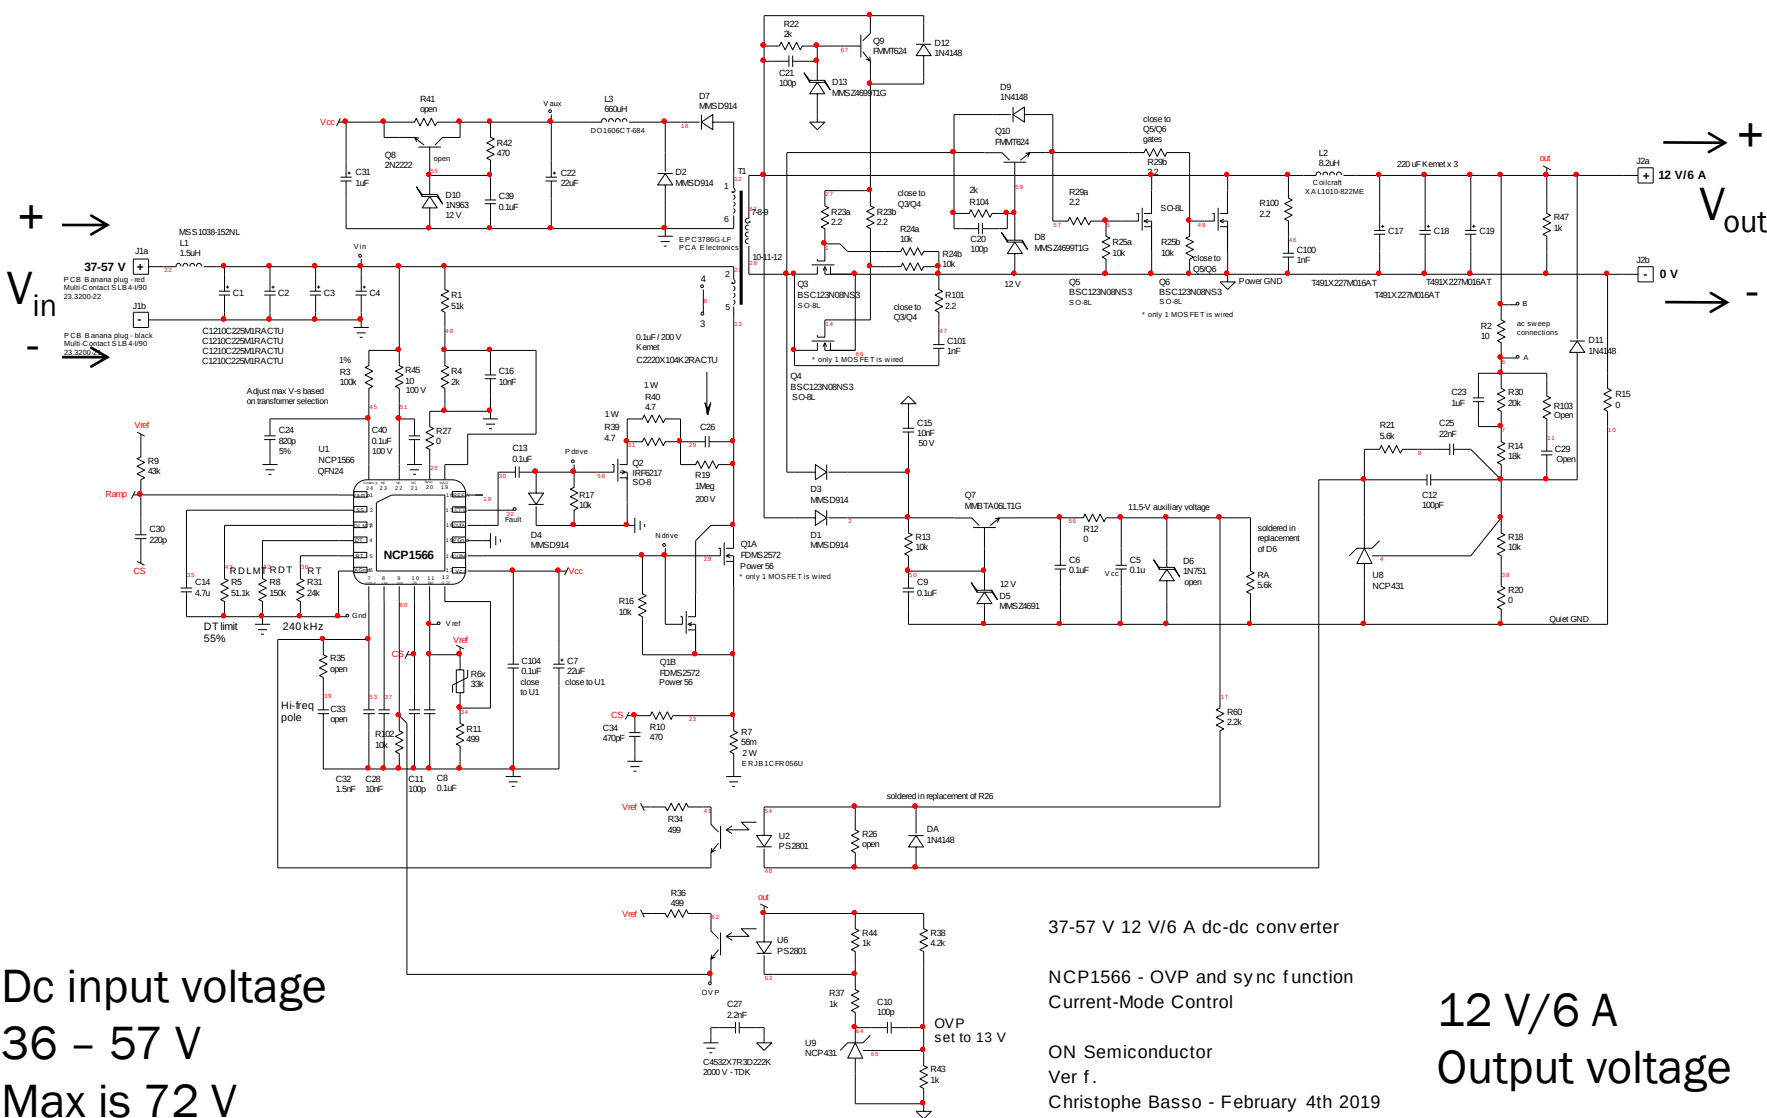

37-57 V 12 V/6 A dc-dc converter


NCP1566 - OVP and sync function
Current-Mode Control

ON Semiconductor

Ver f.

Christophe Basso - February 4th 2019

Board Picture

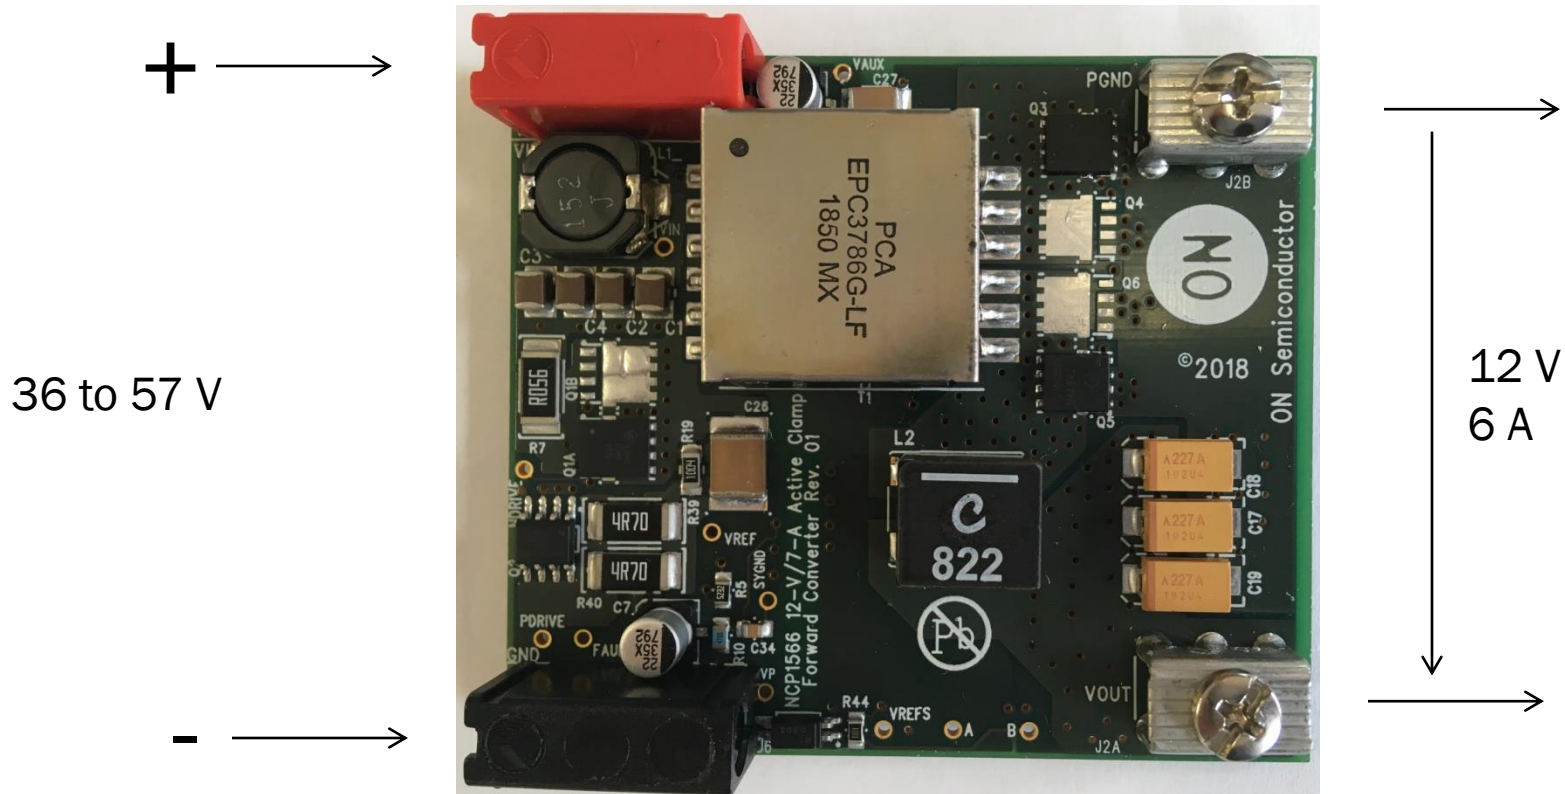

Input voltage is 48 V nominal.
Range is from 36 to 57 V.

Output voltage is 12 V nominal.
Output current is 6 A

NCP1566POEGEVB

Needed Equipment

The needed equipments are the following:



- ❑ a dc voltage source, delivering up to 60 V dc and up to 2 A
 - ❑ a dc load absorbing up to 100 W, $V_{in,max} < 20\text{ V}$, $I_{out,max} < 10\text{ A}$
 - ❑ either the above load can display dc V and dc A or separated V and A-meters are necessary
 - ❑ An oscilloscope with single shot capability
- *Kelvin sensing is necessary to connect the load to the board. If no precautions are taken, it is likely that the voltage drop at the load cables ends induces a reading error*

Basic Test Setup


source



load

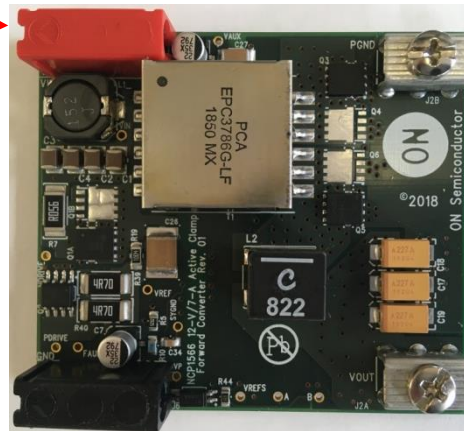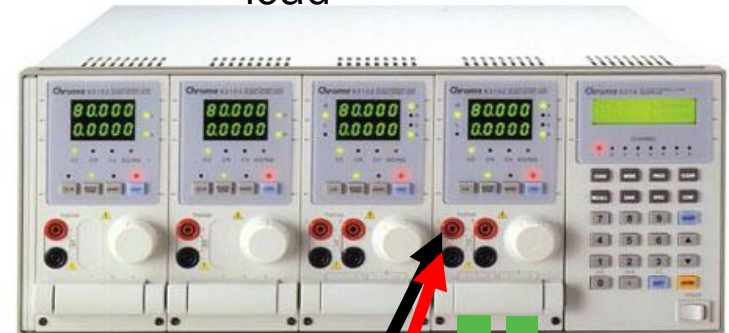

Kelvin sense


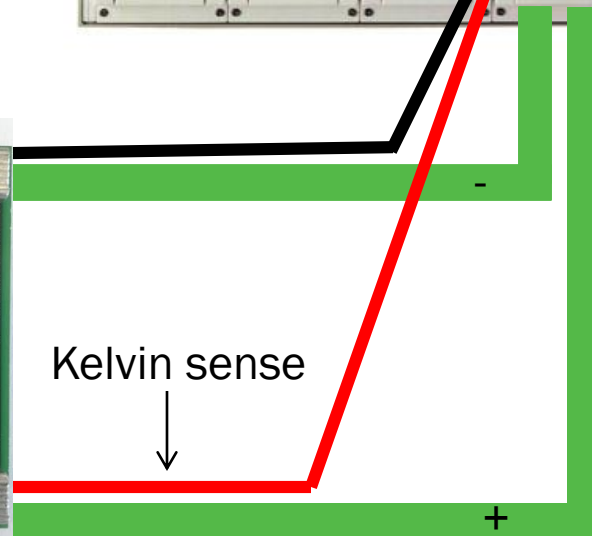


Test n°1

source




load

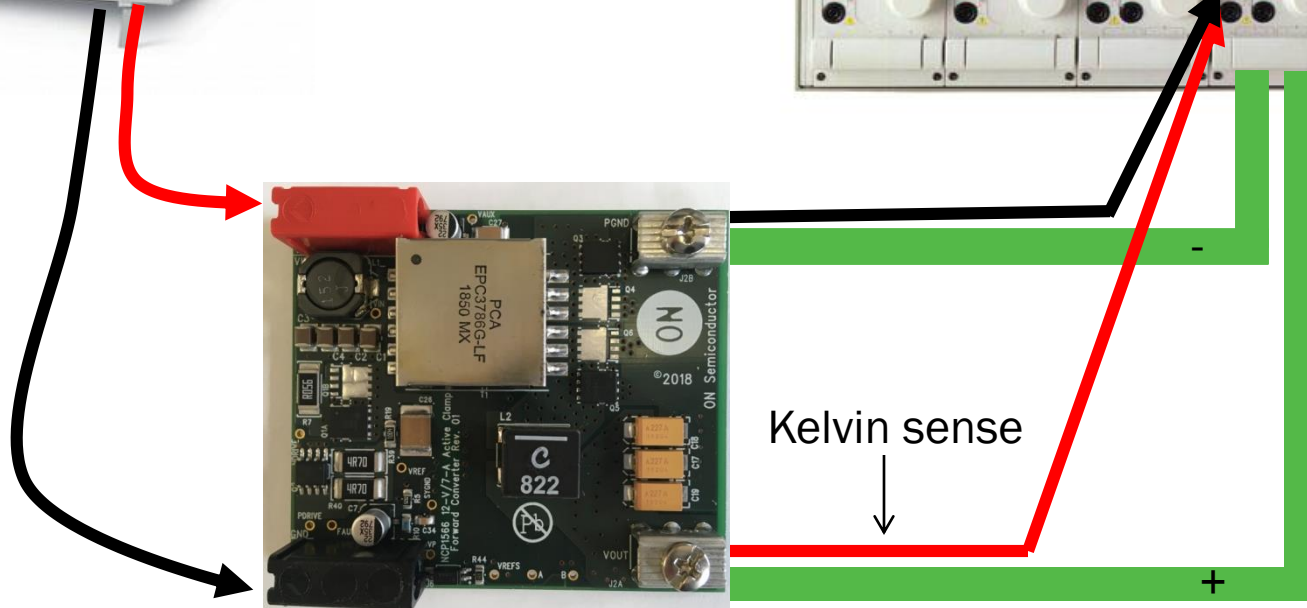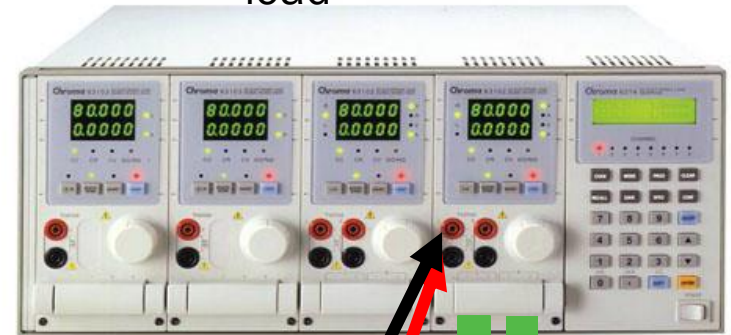


- Start the power supply $V_{in} = 48\text{ V}$ while the load current is 6 A
- Monitor the output voltage on a scope
- Verify the voltage is monotonically rising

Test n°1

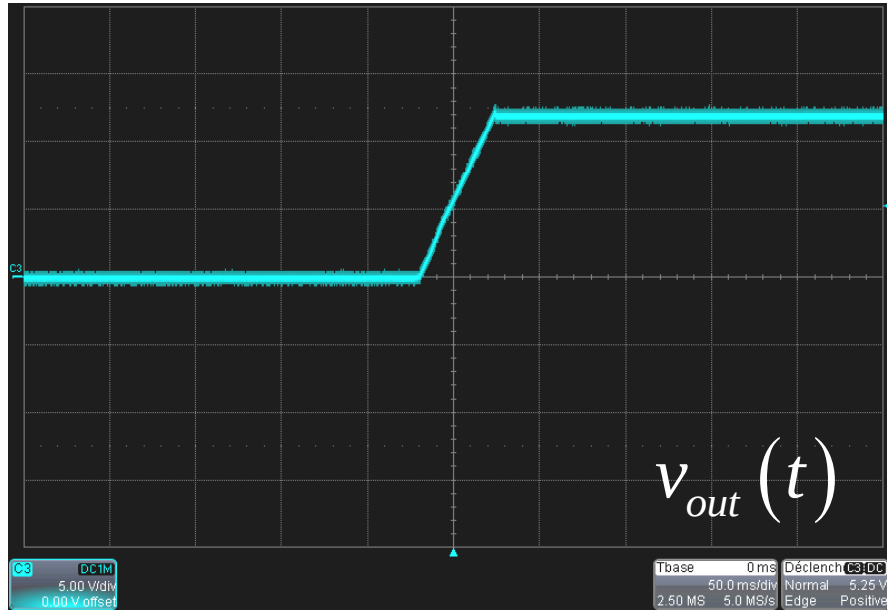

$$V_{in} = 0 \text{ to } 48 \text{ V} - I_{out} = 6 \text{ A}$$

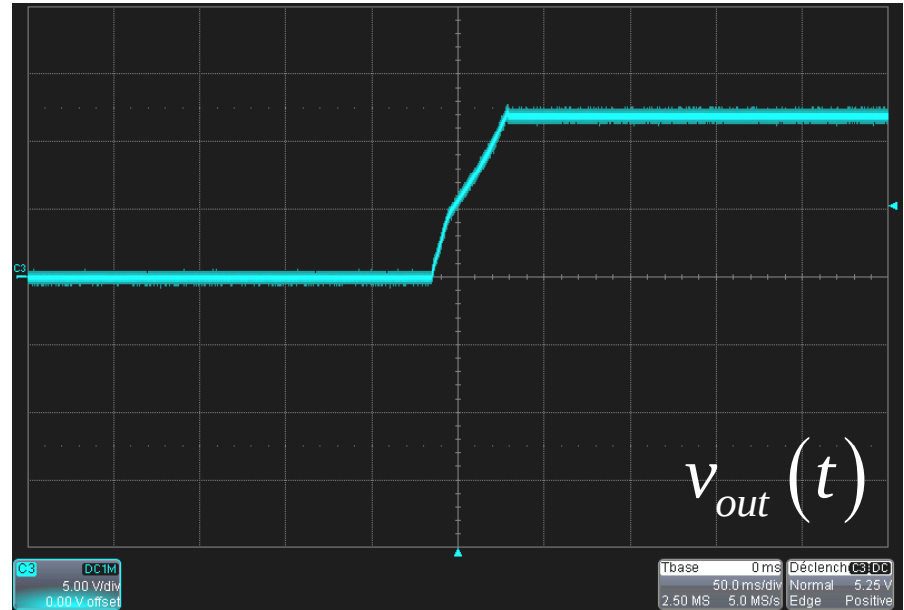



$$V_{in} = 0 \text{ to } 48 \text{ V} - I_{out} = 0 \text{ A}$$

- It is important to verify the absence of negative slope
- Repeat the test for $V_{in} = 36 \text{ V}$ and 57 V
- Change load to 0 A , repeat tests. Wait 10 s between re-starts
- A small glitch at the beginning of the rising edge is acceptable

Test n°3

source


load

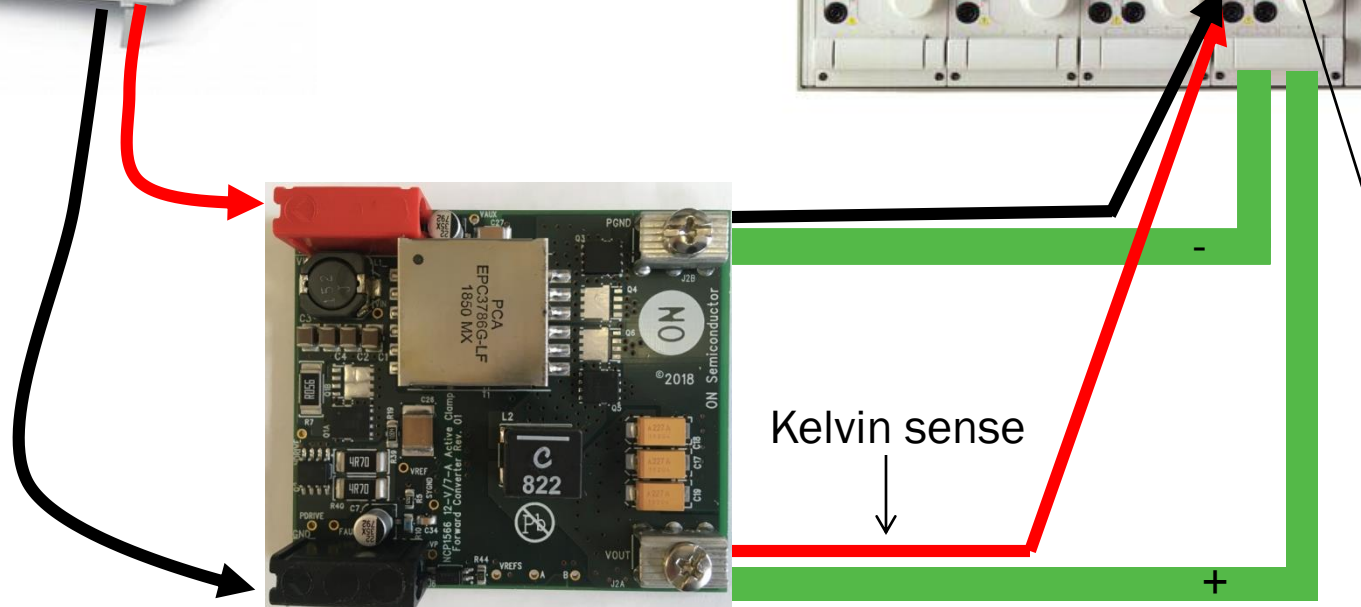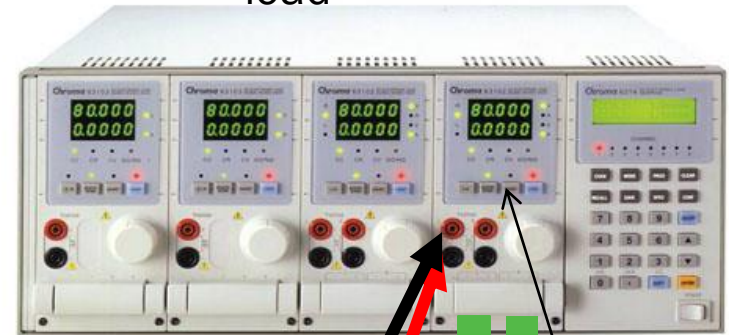


No pigtail!

- Program load to dynamic current mode
- I_{out} from 4 A to 6 A, slope 1 A/ μ s
- 1 ms interval, observe V_{out} on scope in ac, 50 mV/div

Test n°3

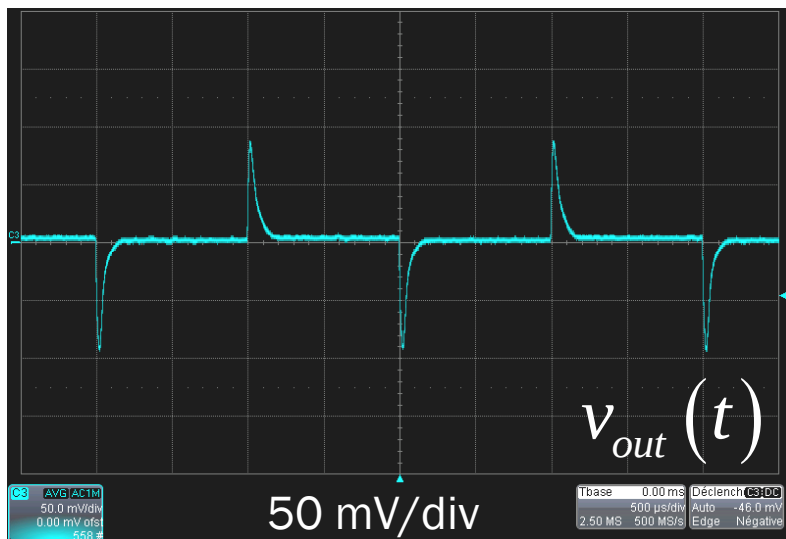

$$V_{in} = 36V - 2 \text{ to } 6A - 1A/\mu s$$

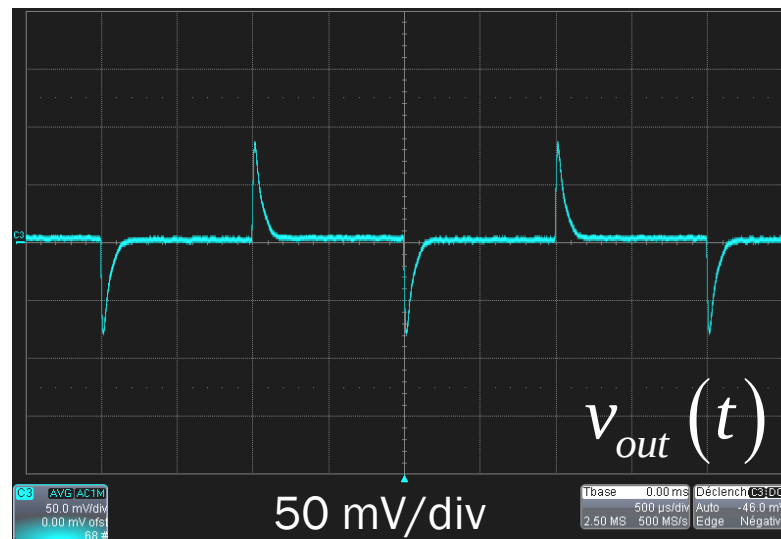

$$V_{in} = 48V - 2 \text{ to } 6A - 1A/\mu s$$



- Run the test from $V_{in} = 36V$ (worst case) to $V_{in} = 57V$.
- Spec is to have an under/over shoot less than 150 mV

Test n° 4

source



load

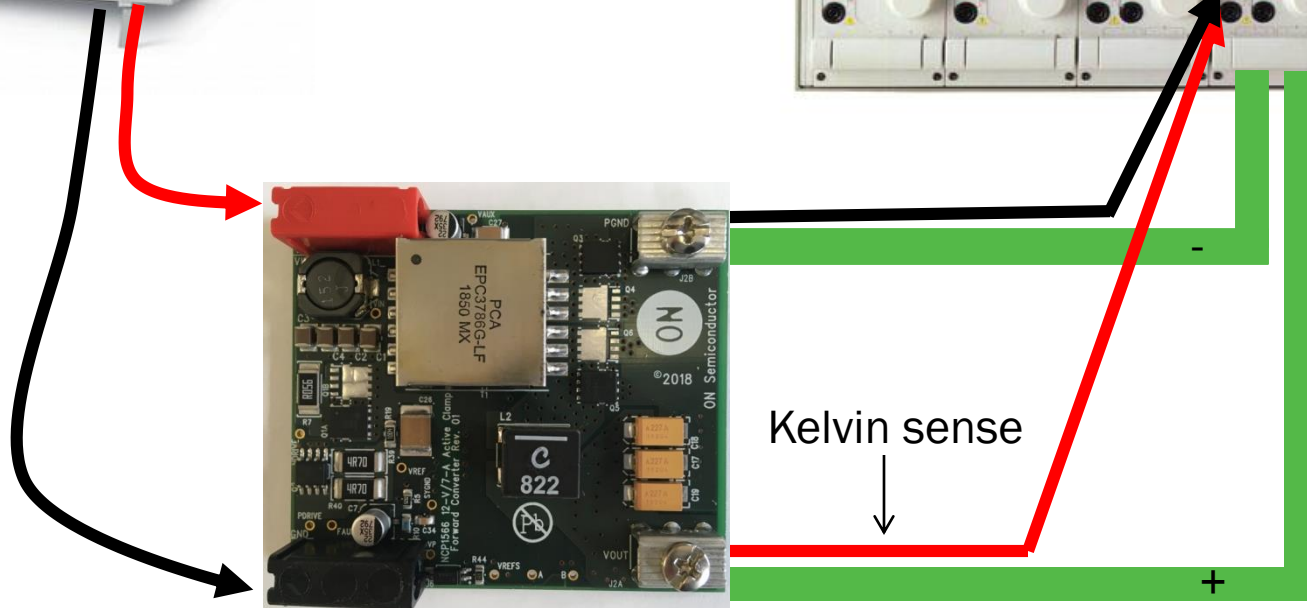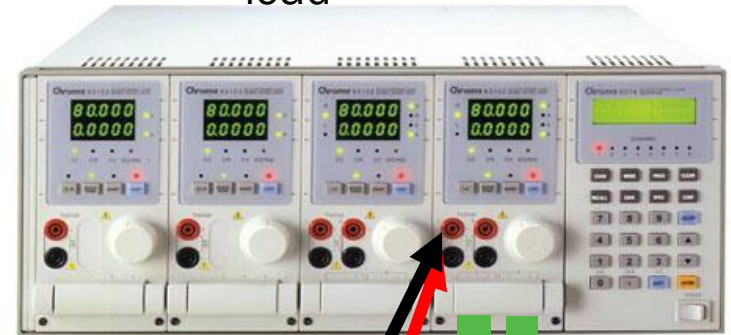

- Leave the board for 5 mn at $V_{in} = 36\text{ V}/6\text{ A}$ and room temperature.
- Check no thermal tripping occurs.
- Board is declared sound.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[onsemi:](#)

[NCP1566POE12V6AGEVB](#)