

# 1SP0350V2A0-45

## Target Data Sheet

High-performance, plug-and-play single-channel IGBT driver based on SCALE™-2 technology for IGBT modules and Press-Packs in 2-level, 3-level and multilevel converter topologies

### Abstract

The SCALE™-2 plug-and-play driver 1SP0350V2A0-45 is a compact single-channel intelligent gate driver with a fiber-optic interface designed for 4500V Press-Packs, IGBT modules and IEGTs.

All components required for driving, such as an isolated DC/DC converter, short-circuit protection, Dynamic Advanced Active Clamping as well as supply voltage monitoring are included on the driver. Enhanced features such as power supply overload protection are also implemented and provide further driving benefits.

The driver's secondary side is electrically isolated from its primary side and meets the requirements of 4500V IGBT applications.

**The turn-on and turn-off gate resistors as well as the auxiliary gate capacitor are not assembled in order to provide maximum flexibility. They must be assembled by the user before start of operation.**

For drivers adapted to other types of high-power and high-voltage IGBT modules, refer to:

[www.power.com/igbt-driver/go/Plug-and-Play](http://www.power.com/igbt-driver/go/Plug-and-Play)

### Features

- ✓ Plug-and-play solution
- ✓ For 2-level, 3-level and multilevel topologies
- ✓ Fiber-optic links
- ✓ Duty cycle 0...100%
- ✓ Dynamic Advanced Active Clamping DA<sup>2</sup>C
- ✓ IGBT short-circuit protection
- ✓ Monitoring of supply voltage
- ✓ Extremely reliable; long service life
- ✓ Shortens application development time
- ✓ Lead-free

### Applications

- ✓ HVDC
- ✓ Flexible AC transmission systems (FACTS)
- ✓ Railroad power supplies
- ✓ Light rail vehicles
- ✓ Traction
- ✓ Medium-voltage converters
- ✓ Industrial drives
- ✓ Wind-power converters
- ✓ Medical applications
- ✓ And many others

## Target Datasheet

### Safety Notice!

The data contained in this data sheet is intended exclusively for technically trained staff. Handling all high-voltage equipment involves risk to life. Strict compliance with the respective safety regulations is mandatory!

Any handling of electronic devices is subject to the general specifications for protecting electrostatic-sensitive devices according to international standard IEC 60747-1, Chapter IX or European standard EN 100015 (i.e. the workplace, tools, etc. must comply with these standards). Otherwise, this product may be damaged.

### Important Product Documentation

This data sheet contains only product-specific data. For a detailed description, must-read application notes and common data that apply to the whole series, please refer to the "Description & Application Manual for 1SP0350V SCALE-2 IGBT Drivers" on [www.power.com/igbt-driver/go/1SP0350V](http://www.power.com/igbt-driver/go/1SP0350V).

The gate resistors as well as the auxiliary gate capacitor on this gate driver are not assembled in order to provide maximum flexibility. For the values required for specific IGBT modules, refer to the paragraph on "Gate Resistor and Auxiliary Gate Capacitor Assembly". Use of gate resistors and gate auxiliary capacitors other than those specified may result in failure.

### Mechanical Dimensions

Dimensions: Refer to the relevant "Description and Application Manual"

Mounting principle: Electrical connection to IGBT module via cables

### Fiber-Optic Interfaces

Interface	Remarks	Part type #
Drive signal input	Fiber-optic receiver (Notes 1, 2)	HFBR-2522ETZ
Status output	Fiber-optic transmitter (Notes 1, 3)	HFBR-1522ETZ

### Electrical Connectors

Interface	Remarks	Part type #
Power supply connector X1	On-board connector (Note 4)	CIM039P5
IGBT module connectors		
X2GE	On-board connectors (Note 5)	71922-120LF
X2G, X2E and X2C	On-board connectors (Note 6)	PCB-1M4

## Target Datasheet

**Absolute Maximum Ratings**

Parameter	Remarks	Min	Max	Unit
Supply voltage $V_{DC}$	VDC to GND	0	16	V
Average supply current $I_{DC}$	Note 7		t.b.d.	mA
SO current	Failure condition, total current (Note 8)		20	mA
Gate output power	$T_a \leq 70^\circ\text{C}$		2.5	W
	$T_a \leq 85^\circ\text{C}$		1.8	W
Switching frequency $f$	Note 9		10	kHz
Power supply short-circuit time	Non-repetitive (Note 10)		1	s
Gate peak current $I_{out}$	Note 11	-50	+50	A
External gate resistance	Turn-on and turn-off (Note 12)	0.3		$\Omega$
DC-link voltage	Switching operation (Note 13)		3400	V
	Off state (Note 14)		4000	V
Test voltage (50Hz/1min.)	Primary to secondary (Note 15)		10.2	$\text{kV}_{eff}$
$ dV/dt $	Rate of change of input to output voltage		35	$\text{kV}/\mu\text{s}$
Operating voltage	Collector-emitter voltage		4500	$V_{peak}$
Operating temperature		-40	+85	$^\circ\text{C}$
Storage temperature		-40	+85	$^\circ\text{C}$

**Recommended Operating Conditions**

Power Supply	Remarks	Min	Typ	Max	Unit
Supply voltage $V_{DC}$	VDC to GND	14.5	15	15.5	V

## Target Datasheet

<b>Electrical Characteristics</b>
-----------------------------------

All data refer to +25°C and  $V_{DC} = 15V$  unless otherwise specified

<b>Power Supply</b>	<b>Remarks</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
Supply current $I_{DC}$	Without load		140		mA
<b>Power Supply Monitoring</b>	<b>Remarks</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
Supply threshold $V_{DC}$	Primary side, clear fault	11.6	12.6	13.6	V
	Primary side, set fault (Note 16)	11.0	12.0	13.0	V
Monitoring hysteresis	Primary side, set/clear fault	0.35			V
Supply threshold $V_{iso}-V_{ee}$	Clear fault	11.6	12.6	13.6	V
	Set fault (Note 17)	11.0	12.0	13.0	V
Monitoring hysteresis	Set/clear fault	0.35			V
Supply threshold $V_{ee}-V_{COM}$	Clear fault		5.15		V
	Set fault (Note 17)		4.85		V
Monitoring hysteresis	Set/clear fault		0.3		V
<b>Power Supply Protection</b>	<b>Remarks</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
Overload power threshold	Output, set fault (Note 18)		17		W
Fault feedback pulse	Fiber-optic OUT (Note 19)	500	1000		µs
<b>IGBT Short-circuit Protection</b>	<b>Remarks</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
Static $V_{CE}$ -monitoring threshold	Between auxiliary terminals (Note 20)		147		V
Response time	DC-link voltage = 3400V (Note 21)		8.8		µs
	DC-link voltage = 2800V (Note 21)		8.8		µs
	DC-link voltage = 500V (Note 21)		10		µs
Delay to IGBT turn-off $t_{CSHD}$	After the response time (Note 22)		0.2		µs
<b>Timing Characteristics</b>	<b>Remarks</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
Turn-on delay $t_{d(on)}$	Note 23		135		ns
Turn-off delay $t_{d(off)}$	Note 23		105		ns
Output rise time $t_{r(out)}$	G to E (Note 24)		t.b.d.		ns
Output fall time $t_{f(out)}$	G to E (Note 24)		t.b.d.		ns
Transmission delay of fault state	Note 25		150		ns
Delay to clear fault state $t_{(block)}$	After IGBT short circuit (Note 26)		9		µs
Acknowledge delay time $t_{d(ack)}$	Note 27		220		ns
Acknowledge pulse width $t_{(ack)}$	On host side	400	700	1050	ns

## Target Datasheet

Gate Output	Remarks	Min	Typ	Max	Unit
Turn-on gate resistor $R_{g(on)}$	Note 28			not assembled	$\Omega$
Turn-off gate resistor $R_{g(off)}$	Note 28			not assembled	$\Omega$
Auxiliary gate capacitor $C_{ge}$	Note 28			not assembled	nF
Gate voltage at turn-on	Note 29		15		V
Gate-voltage at turn-off	Without load (Note 29)		-9.4		V
	$P_{DC/DC} = 1.3W$ (Note 29)		-9.2		V
	$P_{DC/DC} = 2.5W$ (Note 29)		-9.1		V

### Footnotes to the Key Data

- 1) The transceivers required on the host controller side are not supplied with the gate driver. It is recommended to use the same types as used in the gate driver. For product information refer to [www.power.com/igbt-driver/go/fiberoptics](http://www.power.com/igbt-driver/go/fiberoptics).
- 2) The recommended transmitter current at the host controller is 20mA. A higher current may increase jitter or delay at turn-off.
- 3) The typical transmitter current at the gate driver is 20mA. In case of supply undervoltage, the minimum transmitter current at the gate driver is 14mA: this is suitable for adequate plastic optical fibers with a length up to 10 meters.
- 4) This refers to the manufacturer ordering number, see [www.power.com/igbt-driver/go/sauro](http://www.power.com/igbt-driver/go/sauro). Refer to the "Description & Application Manual for 1SP0350V SCALE-2 IGBT Drivers" for more information.
- 5) This refers to the manufacturer ordering number, see [www.power.com/igbt-driver/go/fci](http://www.power.com/igbt-driver/go/fci). X2GE can be used with X2C to connect 1SP0350V to the IGBT module.
- 6) This refers to the manufacturer ordering number, see [www.power.com/igbt-driver/go/ninigi](http://www.power.com/igbt-driver/go/ninigi). X2G, X2E and X2C can be used to connect 1SP0350V to the IGBT module.
- 7) If the specified value is exceeded, this indicates a driver overload. There is no protection against light overload of the power supply. In the case of short circuit/heavy overload at the output, the supply input current is limited internally. The time during which the driver output is shorted/overloaded must be limited externally and must be within the absolute maximum rating.
- 8) Including current flowing into the on-board pull-up resistor of 10k $\Omega$ .
- 9) The maximum switching frequency must additionally be limited by the maximum allowed gate output power.
- 10) Maximum overload duration of the driver output. The driver's power supply VDC must be switched off externally within the given time. The power supply protection prevents the driver's components from being damaged within the given time frame. For details refer to the driver's "Description & Application Manual for 1SP0350V SCALE-2 IGBT Drivers".
- 11) The gate current must be limited to the given values by the gate resistors on the driver and the load.
- 12) The gate resistors are not assembled on this IGBT gate driver. They must be assembled by the user according to the paragraph on "Gate Resistor and Auxiliary Gate Capacitor Assembly".
- 13) This limit is due to active clamping under switching conditions. Refer to the "Description & Application Manual for 1SP0350V SCALE-2 IGBT Drivers".
- 14) Due to the Dynamic Active Advanced Clamping Function (DA<sup>2</sup>C) implemented on the driver, the DC-link voltage can be increased in the off-state condition (e.g. after emergency shut-down). This value is only valid when the IGBTs are in the off state (not switching). The time during which the voltage can be applied should be limited to short periods (< 60 seconds). Refer to the "Description & Application Manual for 1SP0350V SCALE-2 IGBT Drivers".
- 15) HiPot testing (= dielectric testing) must generally be restricted to suitable components. This gate driver is suited for HiPot testing. Nevertheless, it is strongly recommended to limit the testing time to 1s slots. Excessive HiPot testing at voltages much higher than 3182V<sub>AC,rms</sub> may lead to insulation degradation. No degradation has been observed over 1min. testing at 10.2kV<sub>eff</sub>. The transformer of every production sample shipped to customers has undergone 100% testing at the given value for 1s.
- 16) Undervoltage monitoring of the primary-side supply voltage (VDC to GND). If the voltage drops below this limit, a fault is transmitted to the power connector's SO output.

---

## Target Datasheet

- 17) Undervoltage monitoring of the secondary-side supply voltage (Viso to Vee and Vee to COM which correspond with the approximate turn-on and turn-off gate-emitter voltages). If the corresponding voltage drops below this limit on 1SP0350V the IGBT is switched off and a fault is transmitted to the status output.
- 18) Gate turn-on and turn-off current pulses in normal operation do not affect the power supply protection. This protection is only triggered by a corresponding power-supply overload or short circuit (which would also occur in case of gate-emitter short circuit/overload).
- 19) The fault feedback pulse length/pattern depends on the power supply short-circuit/overload. The minimum value applies for any power-supply overload.
- 20) A dynamic  $V_{CE}$  protection is implemented on the driver. The maximum allowed  $V_{CE}$  voltage at turn-on is dynamically adjusted in order to better fit to the IGBT characteristics at turn-on. At the end of the turn-on process the given static value applies.
- 21) The resulting pulse width of the direct output of the gate drive unit for short-circuit type I (excluding the delay of the gate resistors) is the sum of the response time plus the delay to IGBT turn-off (only valid if jumper J1 is not set).
- 22) The turn-off event of the IGBT is delayed by the specified time after the response time if the jumper J1 is not set. If the jumper J1 is set, the driver will only report a fault condition and not turn off the IGBT.
- 23) Including the delay of the external fiber-optic links (cable length: 1m). Measured from the transition of the turn-on or turn-off command at the optical transmitter on the host controller side to the direct output of the gate drive unit (excluding the delay of the gate resistors).
- 24) Output rise and fall times are measured between 10% and 90% of the nominal output swing. The values are given for the driver side of the gate resistors with  $2\Omega/1\mu F$  load. The time constant of the output load in conjunction with the present gate resistors leads to an additional delay at their load side.
- 25) Delay of external fiber-optic links. Measured from the driver secondary side (ASIC output) to the optical receiver on the host controller with a 1m cable.
- 26) Measured on the host side. The fault status is stretched by the given value after the IGBT short-circuit has been turned off.
- 27) Including the delay of the external fiber-optic links (cable length: 1m). Measured from the transition of the turn-on or turn-off command at the optical transmitter on the host controller side to the transition of the acknowledge signal at the optical receiver on the host controller side.
- 28) The gate resistors and the auxiliary gate capacitor are not assembled on this IGBT gate driver. They must be assembled by the user according to the paragraph on "Gate Resistor and Auxiliary Gate Capacitor Assembly".
- 29) The driver secondary-side voltage is split into two distinct voltages on the driver. The first one is the turn-on voltage which is regulated at about 15V. The difference between the total secondary-side voltage and the turn-on voltage is the turn-off voltage which is not regulated and mainly dependent on the driver input voltage VDC and the DC/DC converter power.

Target Datasheet

**Gate Resistor and Auxiliary Gate Capacitor Assembly**

The turn-on and turn-off gate resistors as well as the auxiliary gate capacitor of 1SP0350V drivers are adapted to their respective IGBT modules.

Recommended gate resistors (R148, R149, R138 and R139): PR02 / 2W / 5% from Vishay

Recommended auxiliary gate capacitor (C106): 1206 / X7R / 25V / 5%

The following versions exist:

4500V IGBT Type	R148/ R149	R138/ R139	Resulting Rg,on	Resulting Rg,off	C106
5SNA3000K452300	3Ω	13Ω	1.5Ω	6.5Ω	330n

For the component position, refer to Figs. 1 and 2.

**Assembly Drawing**

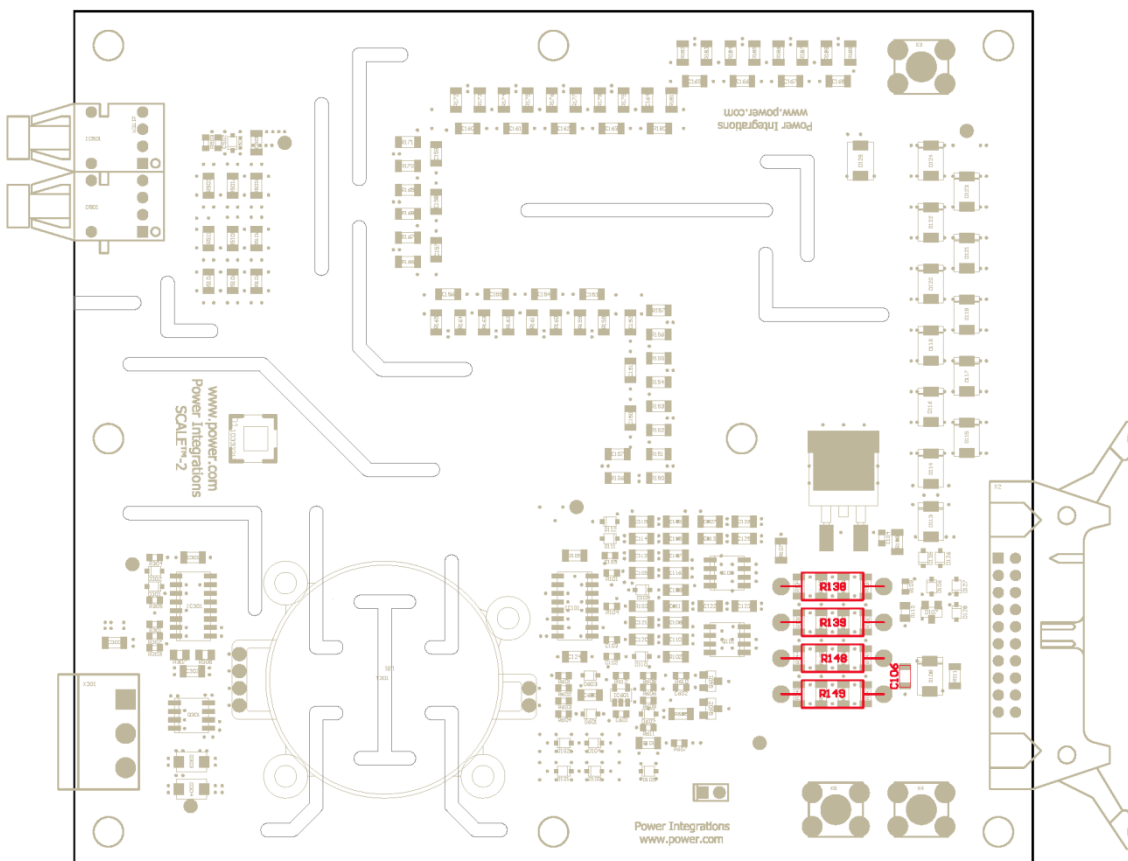


Fig. 1 Assembly drawing of 1SP0350V with highlighted gate resistors and auxiliary gate capacitor

Note that the wires of the gate resistors should not project more than 1mm after soldering (excess length at bottom side). Furthermore, a minimum distance of 1mm must be maintained between the gate resistor body and the PCB.

---

## Target Datasheet

### RoHS Statement

On the basis of Annexes II and III of European Directive 2011/65/EC of 08 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS), we hereby state that the products described in this datasheet do not contain lead (Pb), mercury (Hg), hexavalent chromium (Cr VI), cadmium (Cd), polibrometo of biphenyl (PBB) or polibrometo diphenyl ether (PBDE) in concentrations exceeding the restrictions set forth in Annex II of 2011/65/EC with due consideration of the applicable exemptions as listed in Annex III of 2011/65/EC.

### Legal Disclaimer

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. All parameters, numbers, values and other technical data included in the technical information were calculated and determined to our best knowledge in accordance with the relevant technical norms (if any). They may base on assumptions or operational conditions that do not necessarily apply in general. We exclude any representation or warranty, express or implied, in relation to the accuracy or completeness of the statements, technical information and recommendations contained herein. No responsibility is accepted for the accuracy or sufficiency of any of the statements, technical information, recommendations or opinions communicated and any liability for any direct, indirect or consequential loss or damage suffered by any person arising therefrom is expressly disclaimed.



---

## Target Datasheet

### Ordering Information

Our international terms and conditions of sale apply.

Interface	Power Integrations Driver Type #	Related IGBT
Fiber-Optic Interface	1SP0350V2A0-45	4500V IGBT modules

Product home page: [www.power.com/igbt-driver/go/1SP0350V](http://www.power.com/igbt-driver/go/1SP0350V)

Refer to [www.power.com/igbt-driver/go/nomenclature](http://www.power.com/igbt-driver/go/nomenclature) for information on driver nomenclature.

### Information about Other Products

**For other drivers, product documentation, and application support:**

Please click: [www.power.com](http://www.power.com)

---

Target Datasheet

**Power Integrations Sales Offices**

**WORLD HEADQUARTERS**

5245 Hellyer Avenue  
 San Jose, CA 95138 USA  
 Tel: +1-408-414-9200  
 Fax: +1-408-414-9765  
 Email: [usasales@power.com](mailto:usasales@power.com)

**AMERICAS WEST**

5245 Hellyer Avenue  
 San Jose, CA 95138 USA  
 Tel: +1-408-414-8778  
 Fax: +1-408-414-3760  
 Email: [usasales@power.com](mailto:usasales@power.com)

**GERMANY** (AC-DC/LED Sales)

Lindwurmstrasse 114  
 80337 München, Germany  
 Tel: +49-89-5527-39100  
 Fax: +49-89-1228-5374  
 Email: [eurosales@power.com](mailto:eurosales@power.com)

**INDIA** (Mumbai)

Unit: 106-107, Sagar Tech Plaza-B  
 Sakinaka, Andheri Kurla Road  
 Mumbai, Maharashtra 400072 India  
 Tel 1: +91-22-4003-3700  
 Tel 2: +91-22-4003-3600  
 Email: [indiasales@power.com](mailto:indiasales@power.com)

**JAPAN**

Kosei Dai-3 Bldg.  
 2-12-11, Shin-Yokohama, Kohoku-ku  
 Yokohama-shi, Kanagawa  
 Japan 222-0033  
 Tel: +81-45-471-1021  
 Fax: +81-45-471-3717  
 Email: [japansales@power.com](mailto:japansales@power.com)

**TAIWAN**

5F, No. 318, Nei Hu Rd., Sec. 1  
 Nei Hu Dist.  
 Taipei, 114 Taiwan  
 Tel: +886-2-2659-4570  
 Fax: +886-2-2659-4550  
 Email: [taiwansales@power.com](mailto:taiwansales@power.com)

**AMERICAS EAST**

7360 McGinnis Ferry Road  
 Suite 225  
 Suwannee, GA 30024 USA  
 Tel: +1-678-957-0724  
 Fax: +1-678-957-0784  
 Email: [usasales@power.com](mailto:usasales@power.com)

**CHINA** (Shanghai)

Room 2410, Charity Plaza  
 No. 88 North Caoxi Road  
 Shanghai, 200030 China  
 Tel: +86-21-6354-6323  
 Fax: +86-21-6354-6325  
 Email: [chinasales@power.com](mailto:chinasales@power.com)

**GERMANY** (IGBT Driver Sales)

HellwegForum 1  
 59469 Ense, Germany  
 Tel: +49-2938-64-39990  
 Email: [igbt-driver.sales@power.com](mailto:igbt-driver.sales@power.com)

**INDIA** (New Dehli)

#45, Top Floor  
 Okhla Industrial Area, Phase - III  
 New Dehli, 110020 India  
 Tel 1: +91-11-4055-2351  
 Tel 2: +91-11-4055-2353  
 Email: [indiasales@power.com](mailto:indiasales@power.com)

**KOREA**

RM602, 6FL, 22  
 Teheran-ro 87-gil, Gangnam-gu  
 Seoul, 06164 Korea  
 Tel: +82-2-2016-6610  
 Fax: +82-2-2016-6630  
 Email: [koreasales@power.com](mailto:koreasales@power.com)

**UNITED KINGDOM**

Bulding 5, Suite 21  
 The Westbrook Centre  
 Milton Road  
 Cambridge, CB4 1YG United Kingdom  
 Tel: +44-7823-557-484  
 Email: [eurosales@power.com](mailto:eurosales@power.com)

**AMERICAS CENTRAL**

333 Sheridan Road  
 Winnetka, IL 60093 USA  
 Tel: +1-847-721-6293  
 Email: [usasales@power.com](mailto:usasales@power.com)

**CHINA** (Shenzhen)

17/F, Hivac Building, No 2  
 Keji South 8th Road, Nanshan District  
 Shenzhen, 518057 China  
 Tel: +86-755-8672-8689  
 Fax: +86-755-8672-8690  
 Email: [chinasales@power.com](mailto:chinasales@power.com)

**INDIA** (Bangalore)

#1, 14th Main Road  
 Vasanthangar  
 Bangalore, 560052 India  
 Tel 1: +91-80-4113-8020  
 Tel 2: +91-80-4113-8028  
 Fax: +91-80-4113-8023  
 Email: [indiasales@power.com](mailto:indiasales@power.com)

**ITALY**

Via Milanese 20  
 20099 Sesto San Giovanni (MI), Italy  
 Tel: +39-02-4550-8708  
 Email: [eurosales@power.com](mailto:eurosales@power.com)

**SINGAPORE**

51 Newton Road  
 #19-01/05 Goldhill Plaza  
 Singapore, 308900  
 Tel 1: +65-6358-2160  
 Tel 2: +65-6358-4480  
 Fax: +65-6358-2015  
 Email: [singaporesales@power.com](mailto:singaporesales@power.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Power Integrations:

[1SP0350V2A0ENG-45](#) [1SP0350V2A0-45](#) [1SP0350V2A1ENG-45](#)