AVX Multilayer Ceramic Transient Voltage Suppressors TVS Protection and EMI Attenuation in a Single Chip




GENERAL DESCRIPTION

AVX has combined the best electrical characteristics of its TransGuard® Transient Voltage Suppressors (TVS) and its Feedthru Capacitors into a single chip for state-of-the-art overvoltage circuit protection and EMI reduction over a broad range of frequencies. This unique combination of multilayer ceramic construction in a feedthru configuration gives the circuit designer a single 0805 chip that responds to transient events faster than any TVS device on the market today, and provides significant EMI attenuation when in the off-state.

Automotive TransFeed® is designed for automotive applications and are AEC-Q 200 qualified.

The reduction in parallel inductance, typical of the feedthru chip construction when compared to the construction of standard TVS or ceramic capacitor chips, gives the TransFeed® product two very important electrical advantages: (1) faster "turn-on" time. Calculated response times of <200 pSec are not unusual with this device, and measured response times range from 200 - 250 pSec. The TransFeed® "turn-on" characteristic is less than half that of an equivalent TransGuard® part — and TransGuards® clamp transient voltages faster than any other bipolar TVS solution such as diodes; (2) the second electrical advantage of lower parallel inductance, coupled with optimal series inductance, is the enhanced attenuation characteristics of the TransFeed® product. Not only is there significantly greater attenuation at a higher self-resonance frequency, but the roll-off characteristic becomes much flatter, resulting in EMI filtering over a much broader frequency spectrum. Typical applications include filtering/protection on Microcontroller I/O Lines, Interface I/O Lines, Power Line Conditioning and Power Regulation.

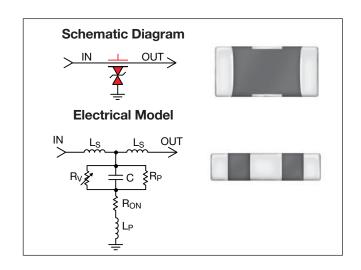

TYPICAL APPLICATIONS

- · Drive by Wire
- **Dimming Mirror Circuit**
- Filtering/protection on Microcontroller I/O lines
- Filtering/protection on Interface I/O lines
- · Power Line Conditioning
- · Power Regulation
- · LCD Dashboard driver

Where designers are concerned with both transient voltage protection and EMI attenuation, either due to the electrical performance of their circuits or due to required compliance to specific EMC regulations, the TransFeed product is an ideal choice.

GENERAL CHARACTERISTICS

- · Operting Teperature: -55°C to +125°C
- · Working Voltage: 5.6Vdc 26Vdc
- · Case Size: 0805
- · Energy Rating: 0.05 0.3J
- · Current: 20 120A
- · Max Feedthru Current: 0.5 1A


FEATURES

- · Bi-directional TVS
- Narrow band, high attenuation filter
- EMI Filtering over broader frequency range
- Fastest Response Time to ESD Strikes
- · AEC-Q 200 Qualified

AVX Multilayer Ceramic Transient Voltage Suppressors TVS Protection and EMI Attenuation in a Single Chip



HOW TO ORDER

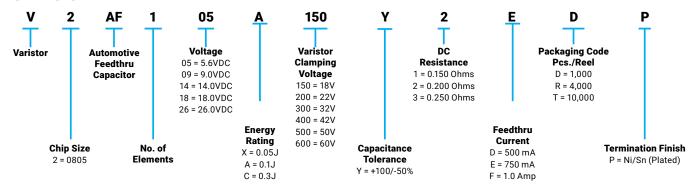

TRANSFEED ELECTRICAL SPECIFICATIONS

AVX Part Number	Working Voltage (DC)	Working Voltage (AC)	Breakdown Voltage	Clamping Voltage	Maximum Leakage Current	Transient Energy Rating	Peak Current Rating	Typical Cap	DC Resistance	Maximum Feedthru Current	Jump Start Voltage
V2AF105A150Y2E	5.6	4.0	8.5±20%	18	35	0.10	30	800	0.200	0.75	-
V2AF105C150Y1F	5.6	4.0	8.5±20%	18	35	0.30	120	2500	0.150	1.00	-
V2AF109A200Y2E	9.0	6.4	12.7±15%	22	25	0.10	30	575	0.200	0.75	-
V2AF109C200Y1F	9.0	6.4	12.7±15%	22	25	0.30	120	1800	0.150	1.00	-
V2AF114A300Y2E	14.0	10.0	18.5±12%	32	15	0.10	30	300	0.200	0.75	27.5
V2AF114C300Y1F	14.0	10.0	18.5±12%	32	15	0.30	120	900	0.150	1.00	27.5
V2AF118A400Y2E	18.0	13.0	25.5±10%	42	10	0.10	30	200	0.200	0.75	27.5
V2AF118C400Y1F	18.0	13.0	25.5±10%	42	10	0.30	120	500	0.150	1.00	27.5
V2AF118X500Y3D	18.0	13.0	25.5±10%	50	10	0.05	20	75	0.250	0.50	27.5
V2AF126C600Y2E	26.0	18.0	34.5±10%	60	10	0.3	80	250	0.2	0.75	27.5

LTermination Finish Code -Packaging Code

 V_w (DC) DC Working Voltage (V) $\mathsf{E}_{\scriptscriptstyle\mathsf{T}}$ Transient Energy Rating (J, 10x1000µS) V_w (AC) AC Working Voltage (V) Peak Current Rating (A, 8x20µS) $V_{_{\rm B}}$

Typical Breakdown Voltage (V @ 1mA_{DC}) Cap Typical Capacitance (pF) @ 1MHz and 0.5 V $V_{\rm B}$ Tol DCR V_D Tolerance is ± from Typical Value DC Resistance (Ohms)


 $V_{\rm c}$ Clamping Voltage (V @ 1A 8x20µS) Maximum Feedthru Current (A) I_{FT} IL Maximum Leakage Current at the Working Voltage (µA) $\boldsymbol{V}_{\text{JUMP}}$ Jump Start Voltage (V, 5 min)

AVX Multilayer Ceramic Transient Voltage Suppressors TVS Protection and EMI Attenuation in a Single Chip



DIMENSIONS mm (inches)

		L	W	T	BW	BL	EW	Х	S
c	0805	2.01 ± 0.20 (0.079 ± 0.008)	1.25 ± 0.20 (0.049 ± 0.008)	1.143 Max. (0.045 Max.)	0.46 ± 0.10 (0.018 ± 0.004)	0.18 + 0.25 -0.08 (0.007 + 0.010 -0.003)	0.25 ± 0.13 (0.010 ± 0.005)	1.02 ± 0.10 (0.040 ± 0.004)	0.23 ± 0.05 (0.009 ± 0.002)




RECOMMENDED SOLDER PAD LAYOUT (TYPICAL DIMENSIONS)

mm (inches)

	T	Р	S	W	L	С
0805	3.45 (0.136)	0.51 (0.020)	0.76 (0.030)	1.27 (0.050)	1.02 (0.040)	0.46 (0.018)

4 Pad Layout

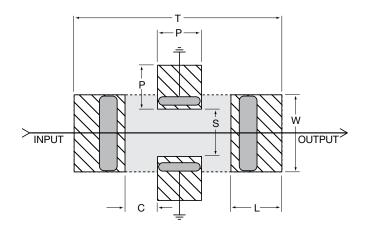

AVX Multilayer Ceramic Transient Voltage Suppressors TVS Protection and EMI Attenuation in a Single Chip



PERFORMANCE CHARACTERISTICS

FEEDTHRU VARISTORS


AVX Multilayer Feedthru Varistors (MLVF) are an ideal choice for system designers with transient strike and broadband EMI/RFI concerns.

Feedthru Varistors utilize a ZnO varistor material and the electrode pattern of a feedthru capacitor. This combination allows the package advantage of the feedthru and material advantages of the ZnO dielectric to be optimized. ZnO MLV Feedthrus exhibit electrical and physical advantages over standard


- ZnO MLVs. Among them are: 1. Faster Turn on Time
 - 2. Broadband EMI attenuation
 - 3. Small size (relative to discrete MLV and EMI filter schemes)

The electrical model for a ZnO MLV and a ZnO Feedthru MLV are shown below. The key difference in the model for the Feedthru is a transformation in parallel to series inductance. The added series inductance helps lower the injected transient peak current (by 2πfL) resulting in an additional benefit of a lower clamping voltage. The lowered parallel inductance decreases the turn on time for the varistor to <250ps.

Discrete MLV Model



Discrete MLVF Model



Where: Voltage Variable resistance

(per VI curve)

1012 0 R,

С defined by voltage rating and energy level

turn on resistance

parallel body inductance

Where: Voltage Variable resistance R,

(per VI curve)

R_n Body IR

С defined by voltage rating and energy level

turn on resistance

minimized parallel body inductance

series body inductance

AVX Multilayer Ceramic Transient Voltage Suppressors TVS Protection and EMI Attenuation in a Single Chip



PERFORMANCE CHARACTERISTICS

APPLICATIONS

- EMI Suppression
- · Broadband I/O Filtering
- · Vcc Line Conditioning

FEATURES

- · Small Size
- Low ESR
- · Ultra-fast Response Time
- · Broad S21 Characteristics

MARKET SEGMENTS

- Computers
- Automotive
- Power Supplies
- · Multimedia Add-On Cards
- Bar Code Scanners
- · Remote Terminals
- Medical Instrumentation
- Test Equipment
- Transceivers
- · Cellular Phones / Pagers

TYPICAL CIRCUITS REQUIRING TRANSIENT VOLTAGE PROTECTION AND EMI FILTERING

The following applications and schematic diagrams show where TransFeed® TVS/ EMI filtering devices might be used:

- System Board Level Interfaces: (Fig. 1)
 Digital to RF
 Analog to Digital
 Digital to Analog
- Voltage Regulation (Fig. 2)
- · Power Conversion Circuits (Fig. 3)
- · GaAs FET Protection (Fig. 4)

Fig. 1 - System Interface










Fig. 3 - Power Conversion Circuits/Power Switching Circuits

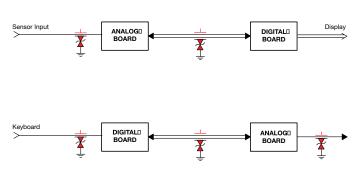



SPECIFICATION COMPARISON

MLVF 0805		PARAMETER	MLV 0805
5ph	Ls	typical	N/A
<600nh	Lp	typical	<1.5nh
<0.025Ω	Ron	typical	<0.1Ω
100pf to 2.5nf	С	typical	100pf to 5.5nf
see VI curves	Rv typical		see VI curves
>0.25 x 1012Ω	Rp typical		>1 x 1012Ω
<250ps	Ty Typica	<500ps	


A comparison table showing typical element parameters and resulting performance features for MLV and MLVF is shown above.

Fig. 4 – GaAs FET Protection

OUTPUT

OUTPUT

Fig. 5 - Automotive TransFeed - Throttle by Wire



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

<u>V3AF418A400Y3GDP</u> <u>V3AF418X500Y3GDP</u> <u>V3AF418A400Y3GRP</u> <u>V3AF418X500Y3GTP</u> <u>V3AF418X500Y3GRP</u> <u>V3AF418A400Y3GTP</u>

Kyocera AVX:

```
        V2AF118A400Y2EDP
        V2AF105C150Y1FDP
        V2AF114C300Y1FDP
        V2AF109C200Y1FDP
        V2AF118X500Y3DDP

        V2AF109A200Y2EDP
        V2AF118C400Y1FDP
        V2AF105A150Y2EDP
        V2AF114A300Y2EDP
        V2AF118C400Y1FRP

        V2AF114C300Y1FRP
        V2AF114A300Y2ERP
        V2AF118C400Y1FTP
        V2AF105A150Y2ETP
        V2AF109C200Y1FTP

        V2AF118X500Y3DTP
        V2AF105C150Y1FTP
        V2AF109C200Y1FRP
        V2AF118A400Y2ETP
        V2AF118X500Y3DRP

        V2AF114C300Y1FTP
        V2AF105C150Y1FRP
        V2AF109A200Y2ETP
        V2AF114A300Y2ETP
        V2AF105A150Y2ERP

        V2AF109A200Y2ERP
        V2AF118A400Y2ERP
        V2AF126C600Y2EDP
        V2F126C600Y2ERP
```