

LT8610

42V, 2.5A Micropower Synchronous Step-Down Regulator

DESCRIPTION

Demonstration circuit 1749B is a 42V, 2.5A micropower synchronous step-down regulator featuring the **LT[®]8610**. The LT8610 is a compact, high efficiency, high speed synchronous monolithic step-down switching regulator that consumes only 2.5 μ A of quiescent current when output is regulated at 5V. Top and bottom power switches, compensation components and other necessary circuits are inside of the LT8610 to minimize external components and simplify design.

The SYNC pin on the demo board is grounded by default for low ripple Burst Mode[®] operation. To synchronous to an external clock, move JP1 to SYNC and apply the external clock to the SYNC turret. Once JP1 is on SYNC position, a DC voltage of higher than 2V or INTV_{CC} can be applied

to the SYNC turret for pulse-skipping operation. Figure 1 shows the efficiency of the circuit at 12V input.

The demo board has an EMI filter installed. The EMI performance of the board is shown on Figure 2. The limit in Figure 2 is EN55022 class B, average. It shows the circuit passes the test with a wide margin.

The LT8610 data sheet gives a complete description of the part, operation and application information. The data sheet must be read in conjunction with this quick start guide for demo circuit 1749B.

Design files for this circuit board are available at <http://www.linear.com/demo/DC1749B>

LT, LT, LTC, LTM, Linear Technology, Burst Mode and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

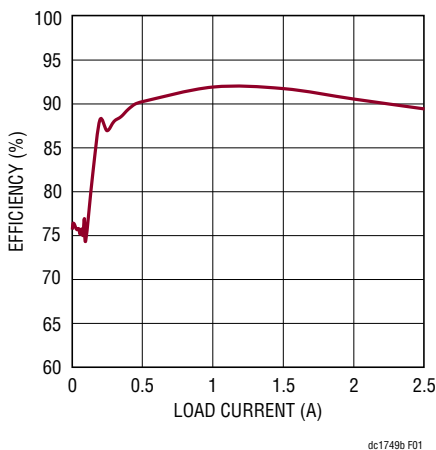


Figure 1. LT8610 12V_{IN} to 5V_{OUT} Efficiency at 2MHz Switching Frequency

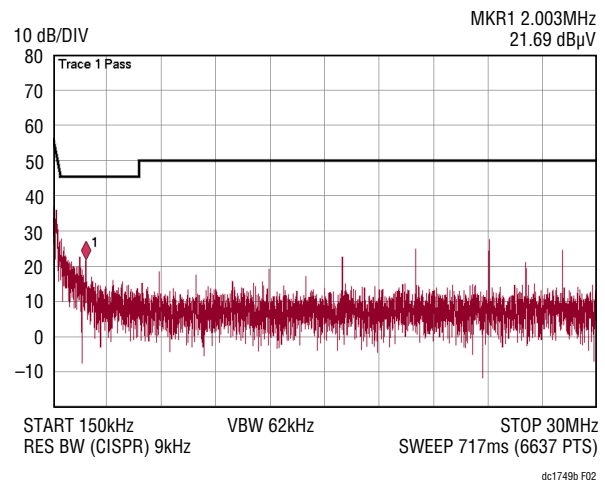


Figure 2. LT8610 Demo Circuit EMI Performance, Switching Frequency = 2MHz

PERFORMANCE SUMMARY Specifications are at $T_A = 25^{\circ}\text{C}$

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V_{IN}	Input Supply Range		5.5		42	V
V_{OUT}	Output Voltage		4.8	5	5.2	V
I_{OUT}	Maximum Output Current		2.5			A
F_{SW}	Switching Frequency		1.85	2	2.15	MHz
EFE	Efficiency at DC	$I_{OUT} = 1\text{A}$		92		%

QUICK START PROCEDURE

Demonstration circuit 1749B is easy to set up to evaluate the performance of the LT8610. Refer to Figure 3 and Figure 4 for proper measurement equipment setup and follow the procedure below:

1. With power off, connect the input power supply to V_{IN} and GND.
2. With power off, connect the load V_{OUT} and GND.
3. Check JP1 setting
4. Turn on the power at the input.
5. Carefully evaluate other design parameters as needed.

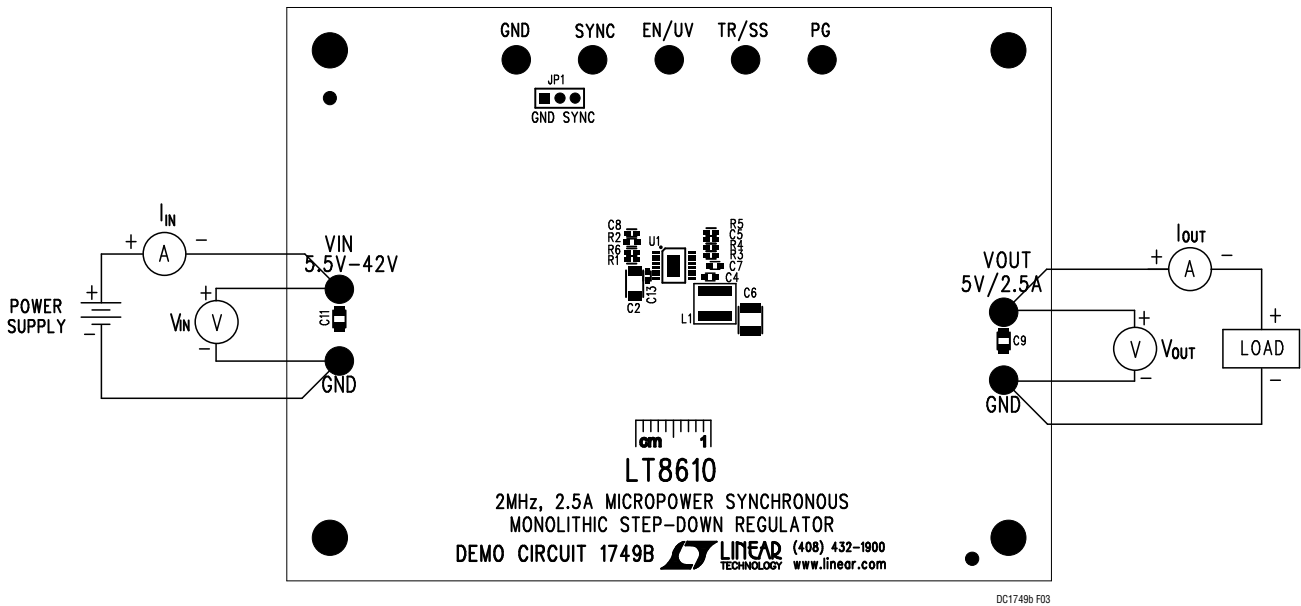


Figure 3. Proper Measurement Equipment Setup

QUICK START PROCEDURE

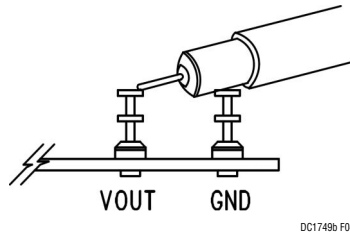


Figure 4. Measure Output Ripple

DEMO MANUAL DC1749B

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	C2	CAP, X7R, 4.7 μ F, 50V, 10%, 1206	MURATA, GRM31CR71H475KA12L
2	1	C4	CAP, X7R, 0.22 μ F, 16V, 10%, 0603	AVX, 0603YC224KAT2A
3	1	C5	CAP, C0G, 10pF, 25V, 10%, 0402	AVX, 04023A100KAT2A
4	1	C6	CAP, X7R, 47 μ F, 10V, 10%, 1210	MURATA, GRM32ER71A476KE20L
5	1	C7	CAP, X7R, 1 μ F, 25V, 10%, 0603	MURATA, GRM188R71E105KA12D
6	1	C8	CAP, X7R, 0.1 μ F, 16V, 10%, 0402	MURATA, GRM155R71C104KA88D
7	1	L1	IND, 2.2UH	COILCRAFT, XAL5030-222MEC
8	1	R2	RES, CHIP, 18.2k, 1/10W, 1%, 0603	VISHAY, CRCW060318K2FKED
9	1	R3	RES, CHIP, 49.9k, 1/16W, 1%, 0402	VISHAY, CRCW040249K9FKED
10	2	R1, R4	RES, CHIP, 1M, 1/16W, 1%, 0402	VISHAY, CRCW04021M00FKED
11	1	R5	RES, CHIP, 243k, 1/16W, 1%, 0402	VISHAY, CRCW0402243KFKED
12	1	U1	IC, LT8610EMSE, MSE16	LINEAR TECHNOLOGY CORPORATION, LT8610EMSE
Additional Demo Board Circuit Components				
1	1	C1	CAP, ALUM, 22 μ F, 63V	SUN ELECT, 63CE22BS
2	2	C3, C10	CAP, X7R, 4.7 μ F, 50V, 10%, 1206	MURATA, GRM31CR71H475KA12L
3	1	C9	CAP, X7R, 4.7 μ F, 16V, 10%, 0805	MURATA, GRM21BR71C475K73L
4	1	C11	CAP, X7R, 1 μ F, 50V, 10%, 0805	TDK, C2012X7R1H105K
5	2	C12, C13	CAP, X7R, 0.1 μ F, 50V, 10%, 0402	TDK, C1005X7R1H104K
6	1	FB1	FERRITE BEAD, 0805	TDK, MPZ2012S221A
7	1	L2	IND 4.7UH	VISHAY, IHLP2020BZ-ER4R7M01
8	0	R6	RES, OPT, 0402	OPT
Hardware: For Demo Board Only				
1	9	E1 TO E9	TESTPOINT, TURRET, 0.094"	MILL-MAX, 2501-2-00-80-00-00-07-0
2	1	JP1	HEADER 1X3 079	SAMTEC, TMM-103-02-L-S
3	1	XJP1	SHUNT, 0.079" CENTER	SAMTEC, 2SN-BK-G
4	4	MH1 TO MH4	STAND-OFF, NYLON 0.50" TALL	KEystone, 8833 (SNAP ON)



DEMO MANUAL DC1749B

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[DC1749B](#)