


SF2024B

467.751 MHz SAW Filter



SMP-03

- Designed for SDARS Receiver IF Application
- Low Insertion Loss
- 5.0 X 7.0 mm Surface-Mount Case
- Differential Input and Output
- Complies with Directive 2002/95/EC (RoHS)



Absolute Maximum Ratings


Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
Max. DC voltage between any 2 terminals	30	VDC
Storage Temperature Range	-40 to +85	°C
Suitable for lead-free soldering - Max Soldering Profile	260°C for 30 s	

Electrical Characteristics

Characteristic	Sym	Notes	Min	Typ	Max	Units
Nominal Center Frequency	f_c			467.751		MHz
Passband						
Minimum Insertion Loss	IL			18	20	dB
1.5 dB Passband	BW _{1.5}			14.2		MHz
3 dB Passband	BW ₃			15		MHz
Amplitude Ripple from fc-6.344 MHz to fc-4.2985 MHz (-20 to 85°C)					1	dB _{p-p}
Amplitude Ripple from fc-6.344 MHz to fc-4.2985 MHz (-40 to -20°C)					1.25	
Amplitude Ripple from fc-4.4865 MHz to fc-2.441 MHz					1	
Amplitude Ripple from fc-2.629 MHz to fc+0.069 MHz					1	
Amplitude Ripple from fc-0.069 MHz to fc+2.629 MHz					1	
Amplitude Ripple from fc+2.441 MHz to fc+4.4865 MHz					1	
Amplitude Ripple from fc+4.2985 MHz to fc+6.344 MHz (-40 to 50°C)					1	dB
Amplitude Ripple from fc+4.2985 MHz to fc+6.344 MHz (50 to 85°C)					1.25	
Group Delay Variation over fc-6.344 MHz to fc-2.441 MHz and from fc+6.344 MHz to fc+2.441 MHz	GDV1			60	80	
Group Delay Variation over fc±2.629 MHz	GDV2			60	120	nS _{p-p}
Rejection						
fc-33 to fc-12 MHz and fc+12 to fc+33 MHz			32	40		dB
fc-12 to fc-10.5 MHz			24	40		
fc+9 to fc+12 MHz			10	24		
Operating Temperature Range	T _A		-40		+85	°C
Differential Input and Output Impedance			150 ohms			
Case Style			SMP-03 7 x 5 mm Nominal Footprint			
Lid Symbolization (YY=year, WW=week, S=shift)			RFM SF2024B YYWWS			

Electrical Connections

Connection	Terminals
Port 1 Hot	10
Port 1 Ground Return	1
Port 2 Hot	5
Port 2 Ground Return	6
Case Ground	All Others

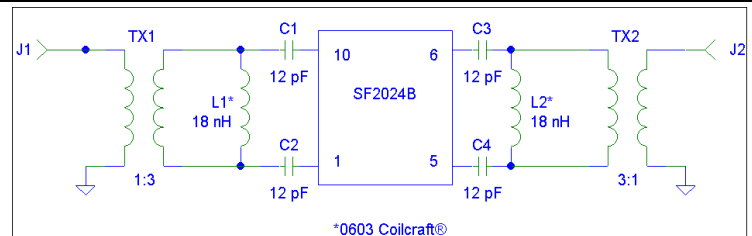






CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

NOTES:

- The design, manufacturing process, and specifications of this device are subject to change.
- US or International patents may apply.

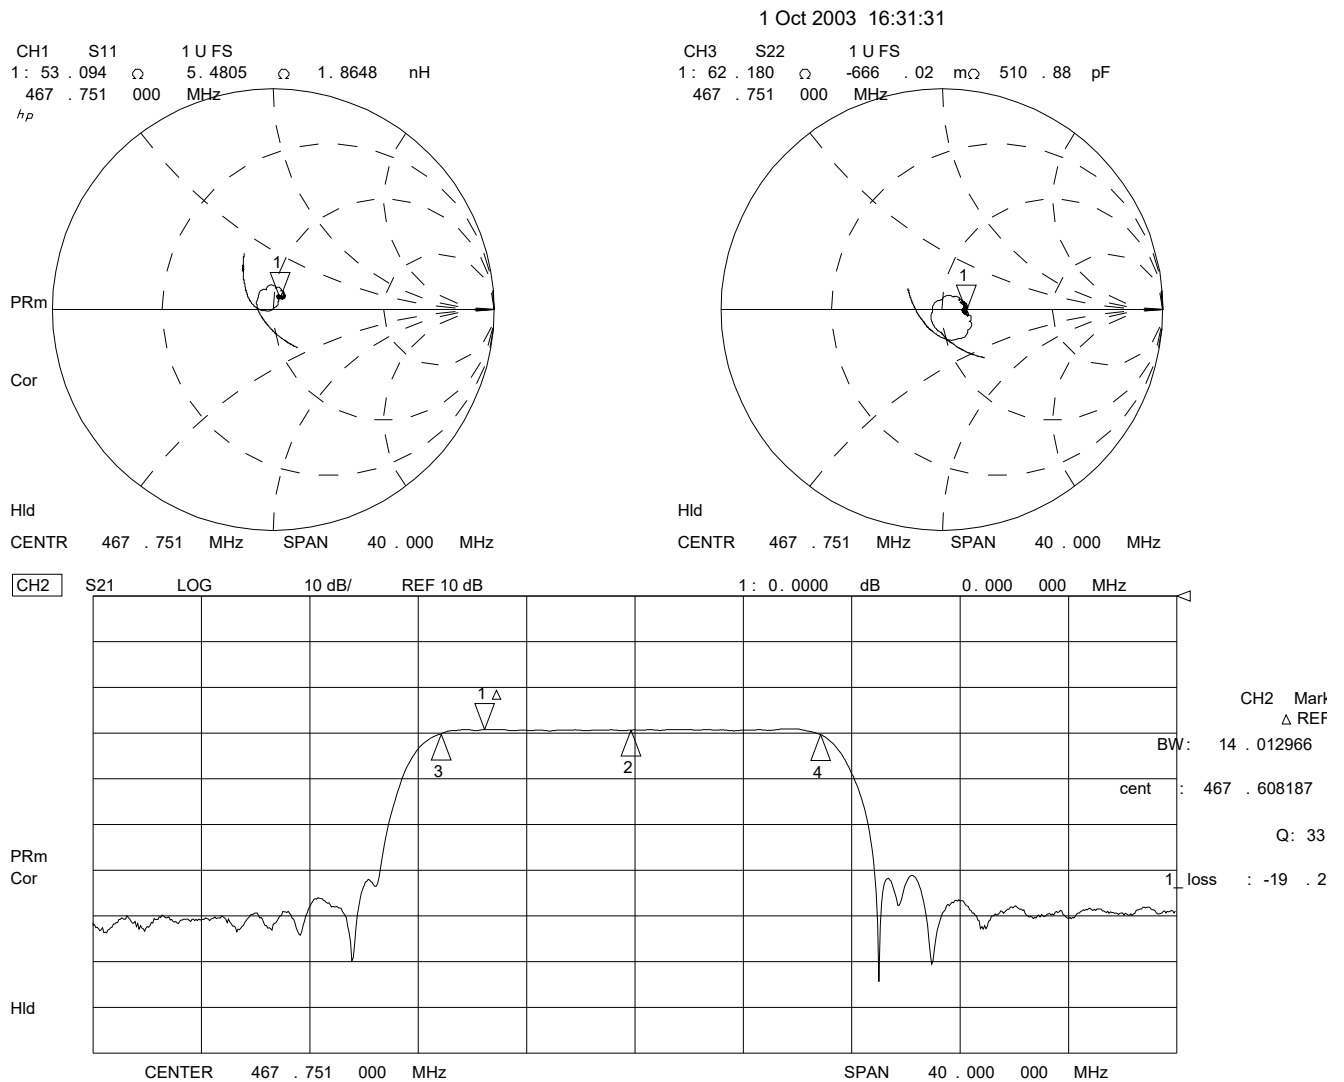


1 Oct 2003 16:35:26

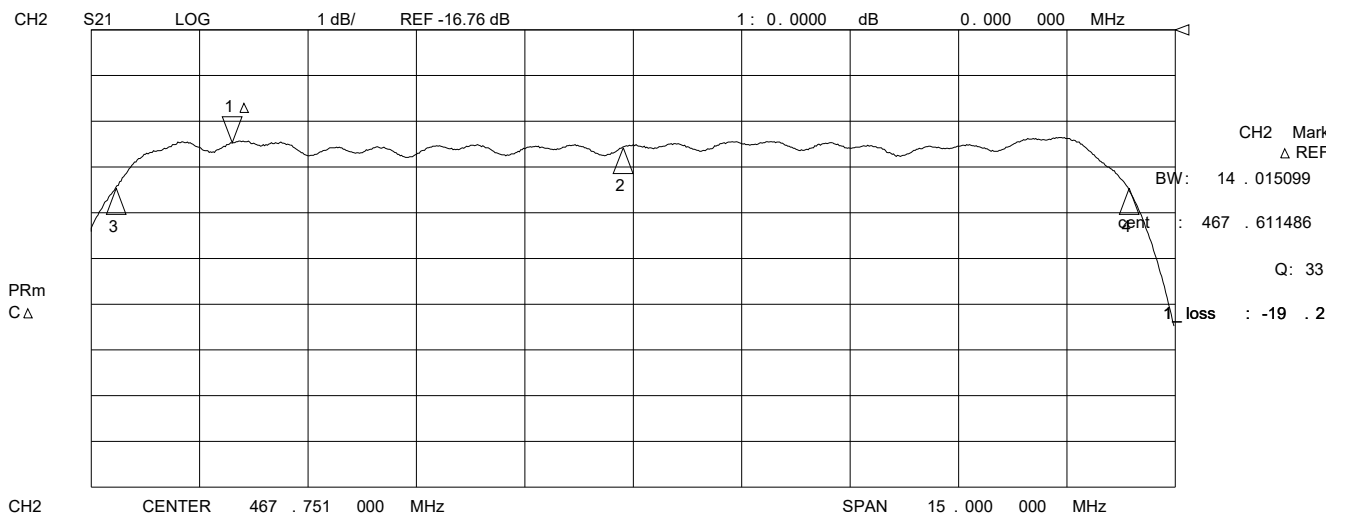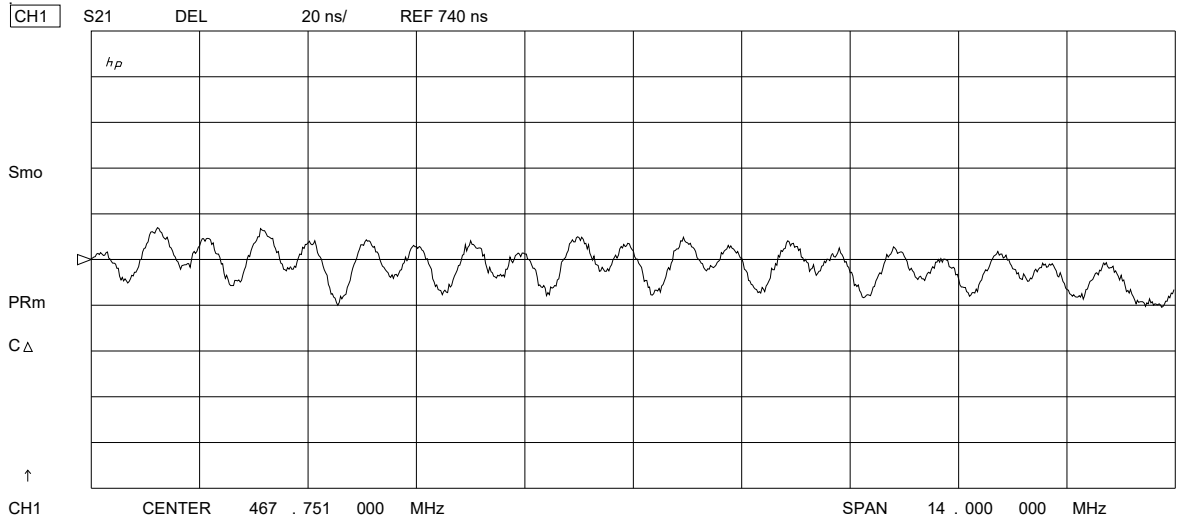



SMP-03 Case

10-Terminal Ceramic Surface-Mount Case



7 x 5 mm Nominal Footprint



Recommended PCB Footprint

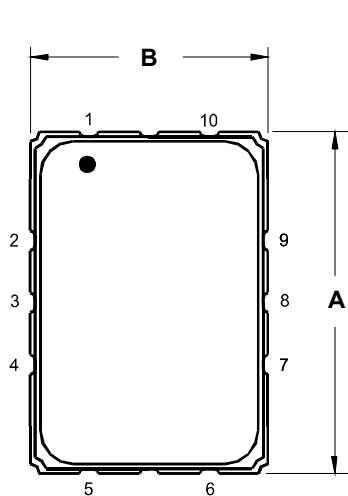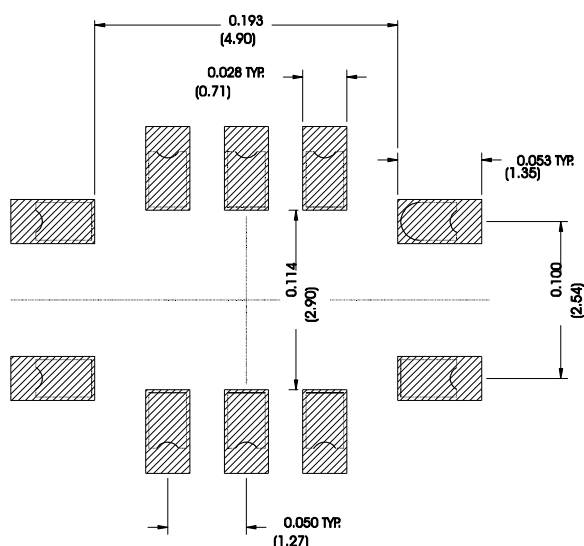

TOP VIEW

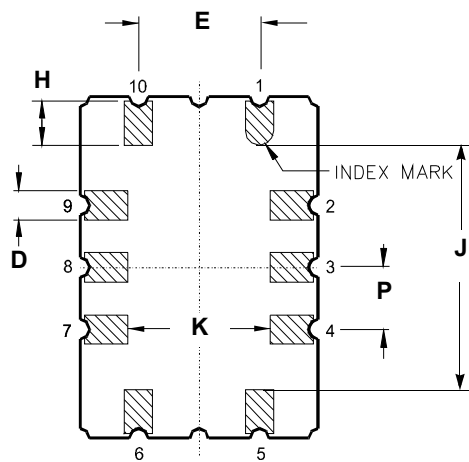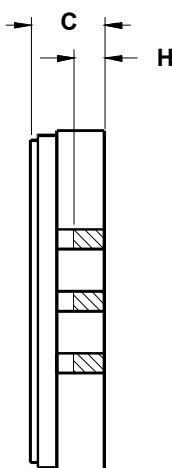

BOTTOM VIEW


Case Dimensions						
Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	6.80	7.00	7.20	0.268	0.276	0.283
B	4.80	5.00	5.20	0.189	0.197	0.205
C		1.65	2.00		0.065	0.079
D	.47	0.60	.73	0.019	0.024	0.029
E	2.41	2.54	2.67	0.095	0.100	0.105
H	0.87	1.0	1.13	0.034	0.039	0.044
J	4.87	5.00	5.13	0.192	0.197	0.202
K	2.87	3.00	3.13	0.113	0.118	0.123
P	1.14	1.27	1.40	0.045	0.050	0.055

Materials	
Solder Pad Termination	Au plating 30 - 60 ulnches (76.2-152 uM) over 80-200 ulnches (203-508 uM) Ni.
Lid	Fe-Ni-Co Alloy Electroless Nickel Plate (8-11% Phosphorus) 100-200 ulnches Thick
Body	Al ₂ O ₃ Ceramic
Pb Free	

Electrical Connections		
Connection		Terminals
Port 1	Input or Return	10
	Return or Input	1
Port 2	Output or Return	5
	Return or Output	6
Ground		All others
Single Ended Operation		Return is ground
Differential Operation		Return is hot

Tape and Reel Specifications



Tape and Reel Standard per ANSI/EIA-481

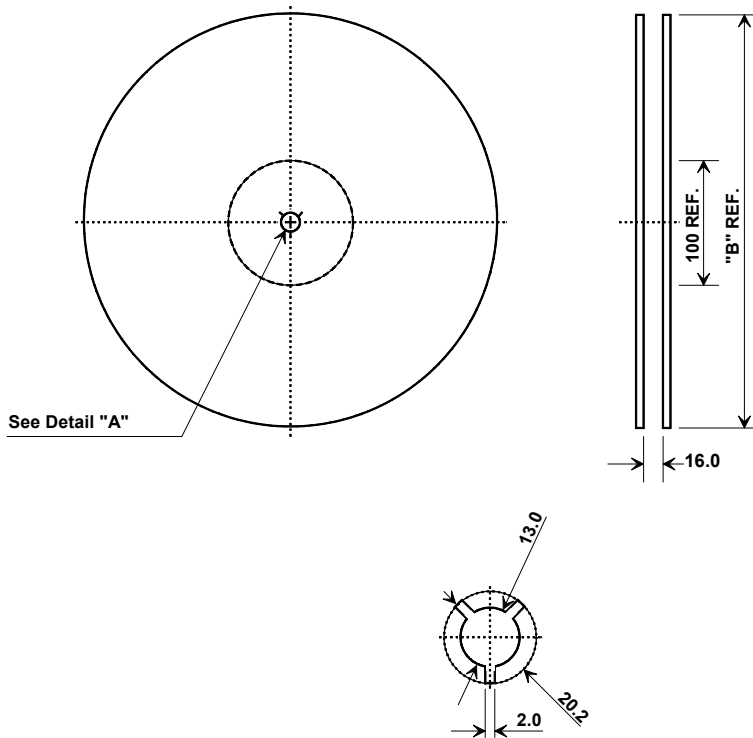

"B" Nominal Size		Quantity Per Reel
Inches	millimeters	
7	178	500
13	330	2000


COMPONENT ORIENTATION and DIMENSIONS

Carrier Tape Dimensions	
Ao	5.5 mm
Bo	7.5 mm
Ko	2.0 mm
Pitch	8.0 mm
W	16.0 mm

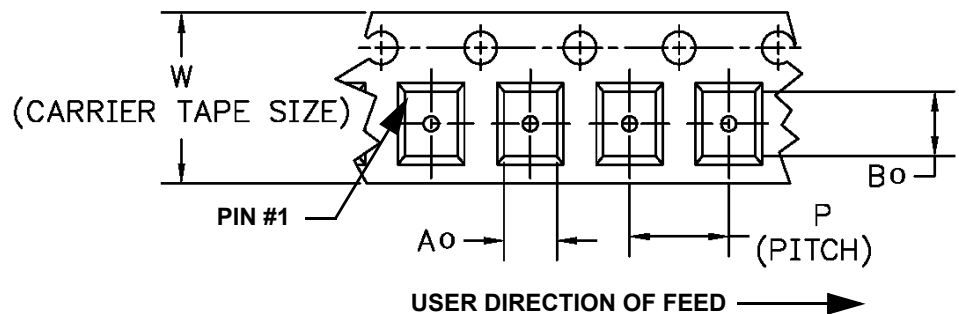

Recommended Reflow Profile

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C+0/-5°C peak (10 seconds).
4. Time: 5 times maximum.

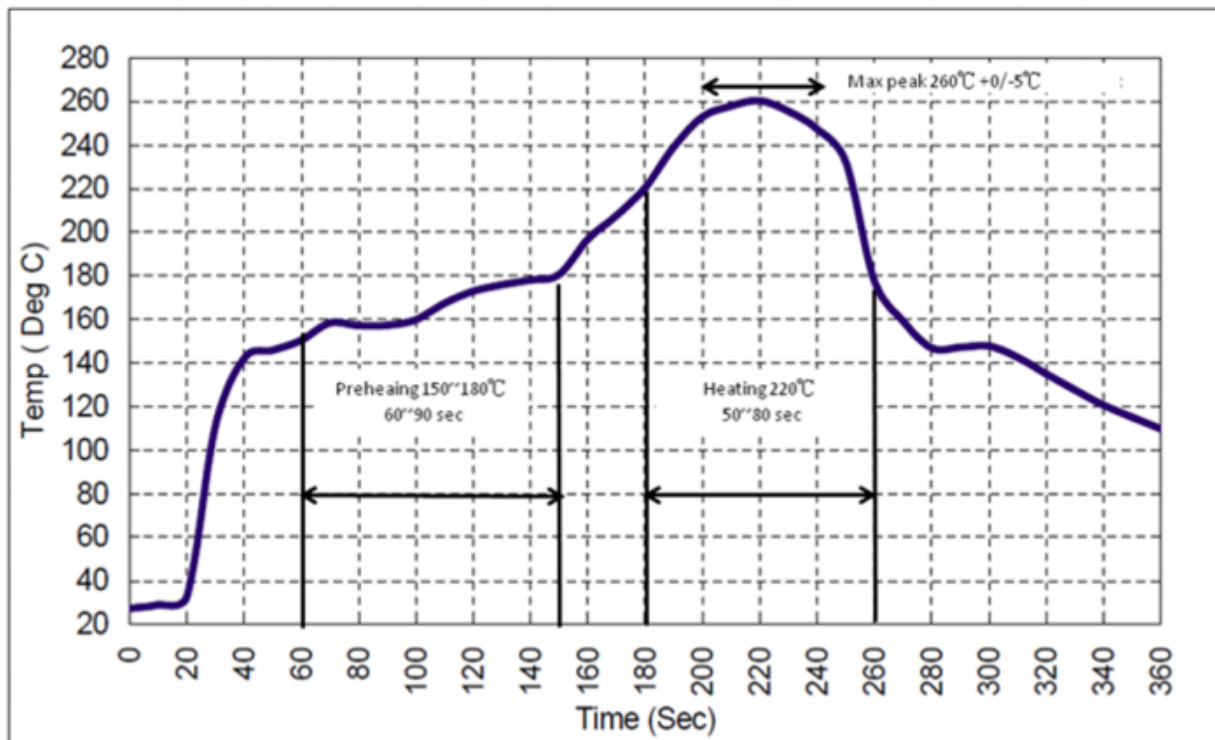

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[RFMi:](#)

[SF2024B](#)