
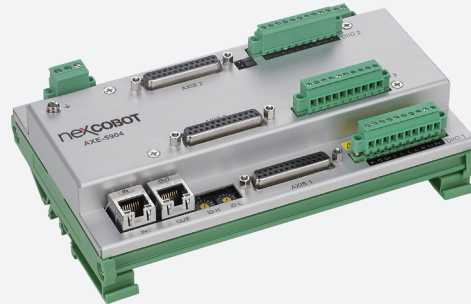


AXE-5904

Point-to-Point 4-Axis Pulse Type Motion EtherCAT Slave Module

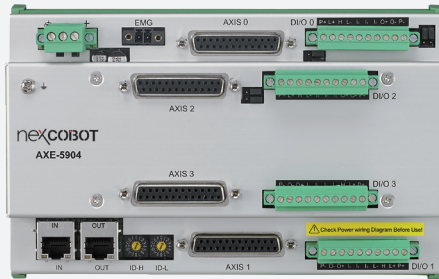

Main Features

- ♦ 4-Axis independent control and pulse output up to 4Mpps
- ♦ Pulse output options: CW/CCW, OUT/DIR
- ♦ 4 x Differential encoder interface, ABZ phase
- ♦ EtherCAT slave protocol communication
- ♦ Support CiA 402 device profile
- ♦ General purpose I/O: 12 DI

Product Overview

AXE-5904 is a 4-axis pulse type point-to-point motion EtherCAT slave module, featuring real-time EtherCAT communication and CiA 402 device profile for machine automation applications requiring high-speed and point-to-points function. With pulse type commands, AXE-5904 supports pulse output rate and encoder input up to 4MHz in 4 xAB phase mode and build-in dedicated I/O points for servo control and mechanism to facilitate building up whole machines.

Specifications

Pulse Type Motion Control

- ♦ Number of axes: 4
- ♦ Pulse output rate: up to 4Mpps
- ♦ Pulse command output: CW/CCW, OUT/DIR
- ♦ Committed I/O signal: LS±/CMP±/HS/SVON/RDY/INP/ALM/ARST/DCLR for each axis

Encoder Input

- ♦ Encoder input type: incremental, 32-bit
- ♦ Encoder signal: CW/CCW, AB/Z
- ♦ Positioning range: -2, 147, 483, 648 through 2, 147, 483, 647 pulse (32-bit)
- ♦ Max. input frequency: 4MHz

General I/O

- ♦ General-purpose input: 3 channel per axis
- ♦ Input type: photo-coupler input (corresponding to current sink output)
- ♦ Response time of DI (Max.): 100 µsec
- ♦ General-purpose output: 2 channel per axis
- ♦ Response time of DO (Max.): 100 µsec

Power Requirements

- ♦ DC input range: DC 24V ±10% with over-voltage and reversed-voltage protection


Common Section

- ♦ Data transfer medium: Ethernet cable (min CAT 5), shield
- ♦ Bus interface: 2 x RJ-45
- ♦ Data transfer rate: 100M baud
- ♦ Protocol: EtherCAT
- ♦ Device profile: CiA 402
- ♦ Operating temperature: 0°C~50°C
- ♦ Relative humidity:
 - 35~85%, non-condensation, operating
 - 10~90%, non-condensation, non-operating
- ♦ Shock: IEC 60068 2-27
- ♦ Vibration: IEC 60068-2-6, IEC 60068-2-64
- ♦ Enclosure type rating: IP00
- ♦ Mounting type: din-rail
- ♦ Dimension (mm): 120.1 x 188 x 55.6 (W x L x H)

Certifications

- ♦ CE
- ♦ FCC Class A

Dimension Drawing

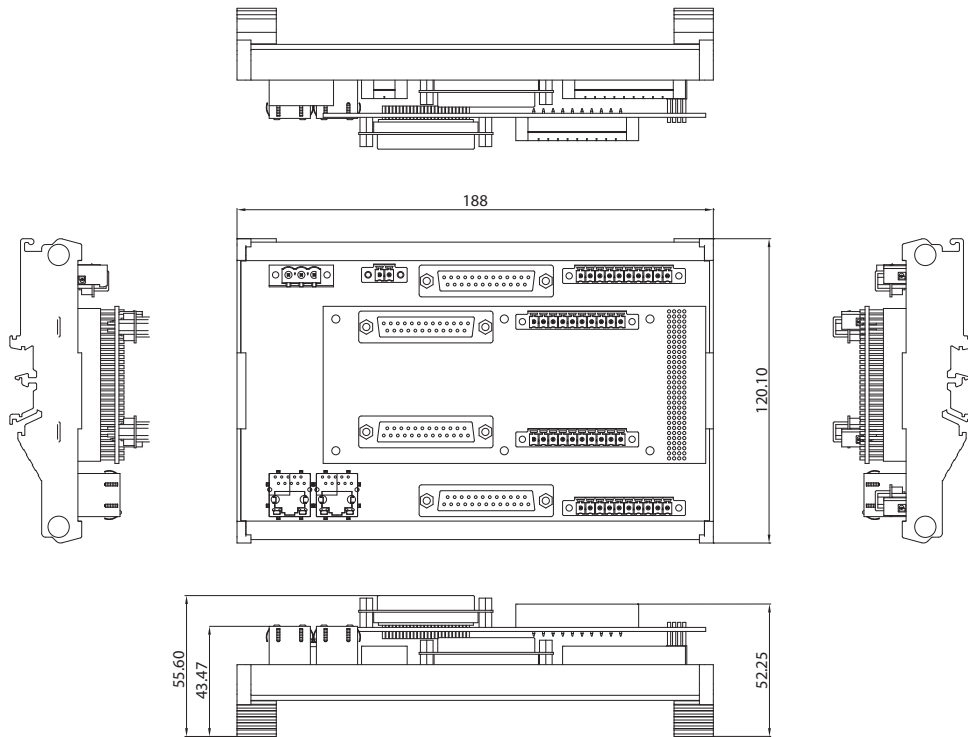

Ordering Information

- ♦ **AXE-5904 (P/N: 10J40590400X0)**
Point-to-point 4-axis pulse type motion EtherCAT slave module

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Nexcom:](#)

[10J40590400X0](#)