ERRATA SHEET # 150320



Date: March 20, 2015

Product:

XBee Development Kits

Summary:

This errata sheet documents a resolution for a known issue with the USB port use on XBee® development board kits shipped prior to 2/23/15.

Issue:

Some Digi XBee® development board kits were confirmed to exhibit a failure when powered through the USB port. The cause was found to be a variation on the voltage regulator that caused some USB circuits to not function properly. Specifically, the boards cause the FTDI chip to not enumerate when the power supply doesn't come up properly to 3.3v.

Determining the failure:

If the board is able to consistently connect through the USB, it is considered ok and not prone to this issue. Because the issue is intermittent, we suggest the user verifies port connectivity three times in succession.

To verify if your board may be faulty, perform the following test:

1) Plug in the USB port to your PC

2) Open up "Device Manager" from your windows PC to make sure all USB units do not have errors. A faulty connection will show up as a USB icon with an exclamation mark. Below in image 1 is a screen shot highlighting a faulty USB connection

Computer Management) 2
ile Action View Help			
• 🔿 🖄 🖬 🗐 📓	風 🗎 🐙 🕫		
Computer Management (Local	IIN-CMS-PMILLE1 Original Computer	Actions	
 Task Scheduler Task Scheduler Shared Folders Control Control Contro Control Control Control Contrective Control Control Contrectiv	 Close drives Display adapters Display adapters Display adapters Display adapters Display adapters Mine and other pointing devices Multi-port serial adapters Multi-port serial adapters Multi-port serial adapters Multi-port serial adapters Porcessors Sound, video and game controllers Sound video and game controllers Sound video and game controllers Storage controllers Storage controllers Generic USB Hub Intel(R) 7 Series/C216 Chipset Family USB Enhanced Host Controller - 1E26 Intel(R) 75 series/C216 Chipset Family USB Enhanced Host Controller - 1E20 Intel(R) 258 Seant Hub Universal Senial Adapter USB Koot Hub USB Seant Hu	Device Manager More Actions	

Resolution:

To resolve the issue, the barrel jack must be supplied with between 6v to 20v of power, prior to connecting the USB port. If the barrel jack is supplied with between 6v to 20v prior to the USB connection, the board will always function properly. However, the barrel jack must be connected first, followed by the USB to guarantee correct operation.

Most of the development kits include one or more 12V power supplies to power one or more boards. If your kit did not have a power supply and you need one, or would like to return your development board for a new fully functional unit, please see the "customer resolution" information and tables below.

Customer Resolution:

If you need a replacement power supply or wish to exchange any affected product, you may request an RMA from the Customer Service team. Please send your request to DigiRMAs@digi.com or contact us by phone at 800-344-4273 Option 4. Please reference the Errata Sheet # along with Part Number and Quantity of the affected part(s).


If you have technical related concerns or questions about this notice please contact our technical support department via telephone at 801-765-9885 or submit a request online at http://www.digi.com/support/eservice/. Please reference the Errata Sheet # along with Part Number and Quantity of the affected part(s).

Product Management Digi International 11001 Bren Road East Minnetonka, MN 55343

Table 1: Affected Board Part Numbers with old / new revisions and descriptions

Part Number	Revision	Description		
XBIB-U-DEV	D	XBee, Dev Interface Board USB		
XBIB-U-SS	D	XBee USB Interface Board - SMT Socket		

Image 2: example board (P/N: XBIB-U-DEV)

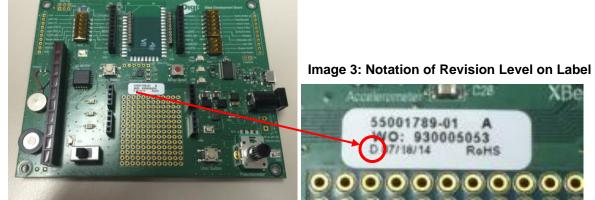

ITEM	DESCRIPTION	BOARD / REPLACEMENT BOARD	POWER SUPPLY (INCLUDED)	Replacement Power Supply
XB24-DKS	XBee Starter Development Kit	XBIB-U-DEV (QTY 2)	24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 1)	
XB24-DKS-INT	XBee Starter Development Kit	XBIB-U-DEV (QTY 2)	18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 1) No power supply on BOM	
XB24-DKSJ	XB 2.4,S1 Starter Kit,Jpn	XBIB-U-DEV (QTY 2)	JP5P2-9V11-6F (9V 1.1A 10 Watt Power Supply) (QTY 1)	
XB24-DMDK	XBee DigiMesh 2.4 Dev Kit	XBIB-U-DEV (QTY 4)	24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 2) 18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 2)	
XB24-DMDK-WJ	XBee DigiMesh 2.4 Dev Kit Jpn	XBIB-U-DEV (QTY 4)	JP5P2-9V11-6F (9V 1.1A 10 Watt Power Supply) (QTY 2)	
XB24-PDK	XBee Professional Developer's	XBIB-U-DEV (QTY 5)	24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 3) 18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 3)	
XB24-PDK-INT	XBee Professional Developer's	XBIB-U-DEV (QTY 5)	No power supply on BOM	
XB24-PDKJ	XBee 802.15.4 Dev Kit Jpn	XBIB-U-DEV (QTY 5)	JP5P2-9V11-6F (9V 1.1A 10 Watt Power Supply) (QTY 3)	
XBP08-DK	XBee-PRO 868 Development Kit	XBIB-U-DEV (QTY 2)	24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 1) 18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 1)	
XBP09-DMDK	XBee-PRO DigiMesh 900 Dev Kit	XBIB-U-DEV (QTY 4)	24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 2) 18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 2)	
XBP24-DKS	XBee-PRO Starter Development k	XBIB-U-DEV (QTY 2)	24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 1) 18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 1)	
XBP24-DKS-INT	XBee-PRO Starter Development k	XBIB-U-DEV (QTY 2)	No power supply on BOM	
XBP24-DKSJ	XBeePRO Starter Dev Kit Japan	XBIB-U-DEV (QTY 2)	JP5P2-9V11-6F (9V 1.1A 10 Watt Power Supply) (QTY 1)	
XBP24BZ7B-DK	XBP,ZB Programmable Dev Kit	XBIB-U-DEV (QTY 2)	No power supply on BOM	
XBP24BZ7B-DK-W	XBP,ZB Int Programmable Dev Kit		No power supply on BOM	
XBP24BZ7B-DK-WJ	XBP,ZB Jpn Programmable Dev Kit ZigBee, RF Module Dev Kit	XBIB-U-DEV (QTY 2) XBIB-U-DEV (QTY 4)	No power supply on BOM	4
XK-Z11-M	ZigBee, RF Wodule Dev Kit	XBIB-O-DEV (QTY 4)	24000056 (PS,12VDC 100-240V 18W 1.5A)(QTY2) 24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 2)	•
XK-Z11-M-W	ZigBee, RF Module Dev Kit-Int	XBIB-U-DEV (QTY 4)	18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 2)	
XK-Z11-M-WA	ZigBee, RF Module Dev Kit - Austr	XBIB-U-DEV (QTY 4)	24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 2) 18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 2)	
XK-Z11-T	iDigi Tank ZB US Kit	XBIB-U-DEV (QTY 1)	24000077 (PS,12V OUT 100/240 LOCK, ISOL RTN)(QTY 1)	76000738 (PS,12VDC 100-240V 18W 1.5A)
XK-Z11-T-W	iDigi Tank ZB Kit Int	XBIB-U-DEV (QTY 1)	24000077 (PS,12V OUT 100/240 LOCK, ISOL RTN)(QTY 1)	/
XK2B-WFT-0	XBee, S6B Wi-Fi Development Kit	XBIB-U-DEV (QTY 1); XBIB-U-SS (QTY 1)	No power supply on BOM	
ХК9-ХСТ-0	XBee-PRO, XSC S3B Dev Kit	XBIB-U-DEV (QTY 2)	JP5P2-9V11-6F (9V 1.1A 10 Watt Power Supply)(QTY 1)	
XK9-XCT-2	XBee-PRO, XSC S3B 920 MHz 9.6	XBIB-U-DEV (QTY 2)	24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 1) 18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 1)	
XKP9-DM-0	XBee-PRO 900HP S3B Dev Kit (Do	XBIB-U-DEV (QTY 3)	JP5P2-9V11-6F (9V 1.1A 10 Watt Power Supply)(QTY 2)	
XKP9-DM-1	XBee-PRO 900HP S3B 920MHz (B	XBIB-U-DEV (QTY 3)	24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 2) 18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 2)	
XKP9-DM-2	XBee-PRO 900HP S3B 920MHz(A	XBIB-U-DEV (QTY 3)	24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 2) 18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 2)	
XKP9-DM-4	XBee-PRO 900HP S3B 920MHz(S	XBIB-U-DEV (QTY 3)	24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 2) 18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 2)	
XKP9-DMB0	XBP, PROG 900HP S3B DEV KIT	XBIB-U-DEV (QTY 3)	JP5P2-9V11-6F (9V 1.1A 10 Watt Power Supply)(QTY 2)	
XK-Z11-S	ZigBee SMT RF Module Dev Kit	XBIB-U-SS (QTY 4)	24000056 (PS,12VDC 100-240V 18W 1.5A)(QTY 2)]
XK-Z11-S-W	ZigBee SMT RF Module Dev Kit-In	XBIB-U-SS (QTY 4)	24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 2) 18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 2)	
XK-Z11-S-WA	ZigBee SMT RF Module Dev Kit - A	XBIB-U-SS (QTY 4)	24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 2) 18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 2)	j l
XK2-Z7SB0	XBP, ZB SMT 32K Prog Dev Kit US		No power supply on BOM]
XK2-Z7SBE0	XBP, ZB SMT 32K Prog Dev Kit EM		No power supply on BOM	4
XK2-Z7SBJ0	XBP, ZB SMT 32K Prog Dev Kit JPN		No power supply on BOM	4
XK2B-WFT-0	XBee, S6B Wi-Fi Development Kit	XBIB-U-DEV (QTY 1); XBIB-U-SS (QTY 1)	No power supply on BOM	
XK8-DMS-0	XBee, 865/868LP Dev Kit	XBIB-U-SS (QTY 3)	24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 2) 18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 2)	
XK8-DMSB0	XBee, 865/868LP Programmable	XBIB-U-SS (QTY 3)	24000056 (PS,12VDC 100-240V 18W 1.5A) (QTY 2) 18000291 (CONN,AC Plug Kit EU,UK,AUST) (QTY 2)	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Digi International:

<u>XK-Z11-M</u> <u>XK-Z11-T-W</u> <u>XK8-DMSB0</u> <u>XB8-DMPSB001</u> <u>XB8-DMUSB001</u> <u>XB8-DMRSB001</u> <u>XK8-DMS-0</u> <u>XK-Z11-M-</u> <u>W</u>