

SSL Interface Controller for Analog (0-10V/0-5V), PWM, and Resistor Dimming with Optocoupler Delay Elimination

1 Description

The iW330 is a PWM signal generator that works with three different types of dimming inputs, 0-5V and 0-10V PWM dimming, 0-5V and 0-10V linear dimming or simple dimming using a single resistor to ground from the DIM pin. The iW330 converts either of these three signals into a 5%-100% PWM duty cycle that can then be used to provide a dimming signal to a primary-side LED driver such as the iW3636, removing the need for transformers or other driver circuitry. The iW330 offers an optional turn-off function where the output will turn-off completely at a minimum dimming voltage.

The output PWM frequency can be programmed from 100Hz to 5kHz through a single capacitor to ground. The input to the iW330 integrates the necessary current source to interface with both active and passive 0-10V dimmers without additional circuitry, while the output can drive an optocoupler to provide isolated dimming control from the secondary to the primary.

2 Features

- 15V to 60V operating voltage
- 3-in-1 dimmer interface
 - » 0-10V or 0-5V linear dimming
 - » 0-10V or 0-5V PWM dimming
 - » Single resistor dimming
- SOIC-8 package
- Low power shutdown mode
- Optional turn-off threshold (-30/-32 options)
- 5% to 100% PWM output
 - » 1% PWM duty cycle tolerance
 - » Selectable frequency range via external capacitor
- Integrated current source for driving 0-10V or 0-5V dimmers
- Integrated optocoupler driver for isolated applications

3 Applications

- 0-10V LED dimming application
- 3-in-1 LED driver interface chip (0-5V/0-10V linear, 0-5V/0-10V PWM and R dimming) dimming LED driver application

© 2020 Dialog Semiconductor

SSL Interface Controller for Analog (0-10V/0-5V), PWM, and Resistor Dimming with Optocoupler Delay Elimination

4 Pinout Description




Figure 4.1 : 8-Lead SOIC Package

Pin Number	Pin Name	Type	Pin Description
1	VIN	Power Supply	Power supply up to 60V.
2	GND	Ground	Ground connection.
3	VCC	Power Supply	Internal 5V LDO output, connect a 1μF capacitor to GND.
4	DRV	Output	Drive external optocoupler to pass down dimming PWM duty information.
5	DIM	Analog Input	iW330-x0: 0-10V/PWM/RDIM 3-in-1 dimming information input, there is a constant current source of 100μA internal for driving 0-10V dimmer and RDIM resistor. iW330-x2: 0-5V/PWM/RDIM 3-in-1 dimming information input, there is a constant current source of 100μA internal for driving 0-10V dimmer and RDIM resistor.
6	FLT	Analog Input	Dimming voltage integral compensation input pin. When UVLO and OVP, the pin is pulled down to GND.
7	CF	Analog Input	Set the PWM output frequency: 100Hz – 5kHz.
8	SD	Analog Input	External V _{IN} voltage sensing pin to set V _{IN} OVP threshold voltage.

SSL Interface Controller for Analog (0-10V/0-5V), PWM, and Resistor Dimming with Optocoupler Delay Elimination

5 Absolute Maximum Ratings

Absolute maximum ratings are the parameter values or ranges which can cause permanent damage if exceeded.

Parameter	Symbol	Value	Units
VIN to GND	V_{VIN}	-0.3 to 65	V
DIM to GND		-0.3 to 65	V
DRV, FLT, CF, SD to GND		-0.3 to 5.5	V
ESD rating per JEDEC JS-001-2017		±2,000	V
Storage temperature range		-65 to +150	°C
Maximum junction temperature		150	°C

6 Physical Dimensions

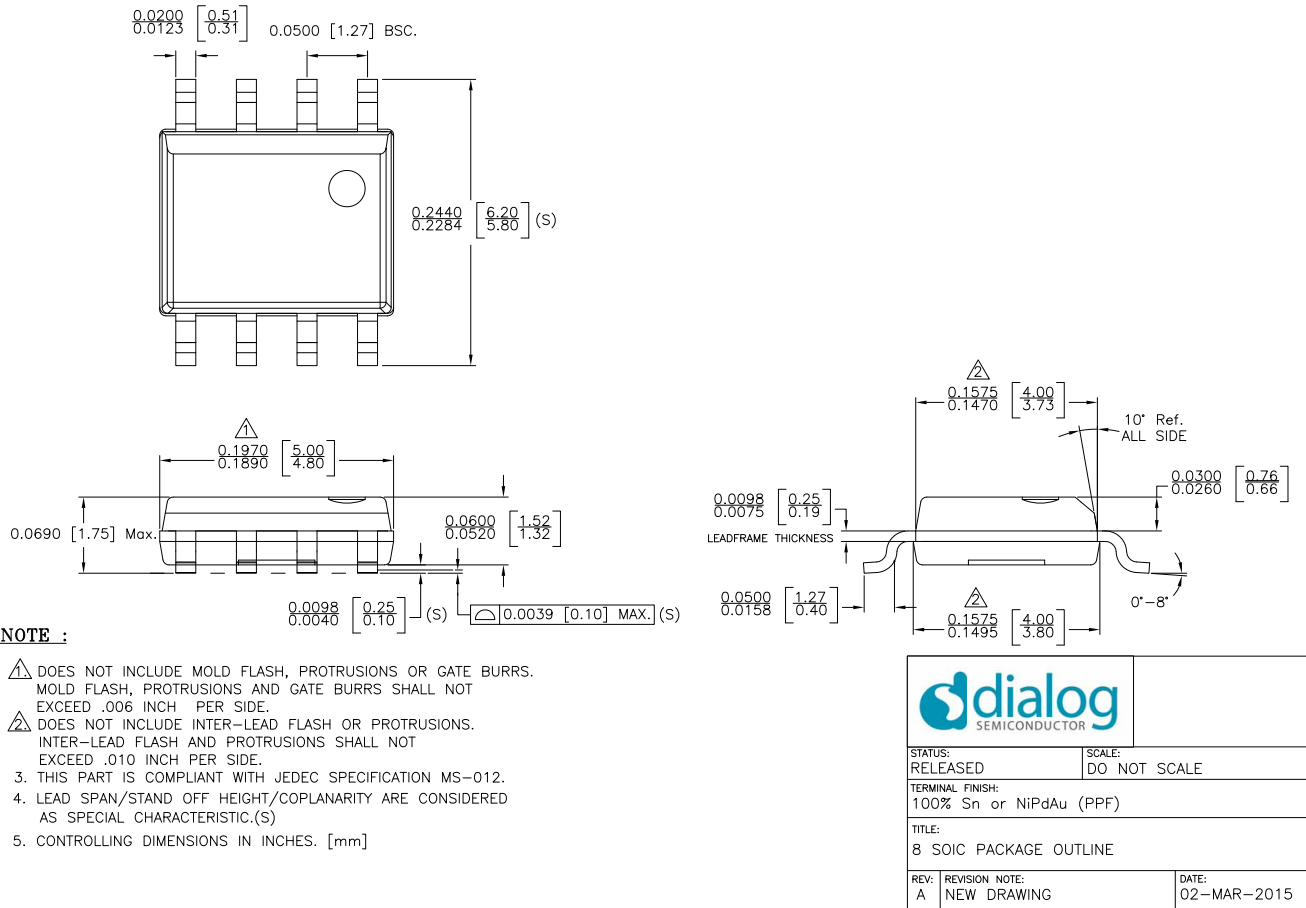


Figure 6.1 : Physical Dimensions of 8-Pin SOIC Package

7 Ordering Information

Part Number	Options	Package	Description
iW330-00	0-10V PWM Driver; Turn-off Function Disabled	SOIC-8	Tape & Reel ¹
iW330-02	0-5V PWM Driver; Turn-off Function Disabled	SOIC-8	Tape & Reel ¹
iW330-30	0-10V PWM Driver; Turn-off Function Enabled	SOIC-8	Tape & Reel ¹
iW330-32	0-5V PWM Driver; Turn-off Function Enabled	SOIC-8	Tape & Reel ¹

Note 1. Tape and reel packing quantity is 2,500/reel. Minimum packing quantity is 2,500.

SSL Interface Controller for Analog (0-10V/0-5V), PWM, and Resistor Dimming with Optocoupler Delay Elimination

Disclaimer

Unless otherwise agreed in writing, the Dialog Semiconductor products (and any associated software) referred to in this document are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Dialog Semiconductor product (or associated software) can reasonably be expected to result in personal injury, death or severe property or environmental damage. Dialog Semiconductor and its suppliers accept no liability for inclusion and/or use of Dialog Semiconductor products (and any associated software) in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Information in this document is believed to be accurate and reliable. However, Dialog Semiconductor does not give any representations or warranties, express or implied, as to the accuracy or completeness of such information. Dialog Semiconductor furthermore takes no responsibility whatsoever for the content in this document if provided by any information source outside of Dialog Semiconductor.

Dialog Semiconductor reserves the right to change without notice the information published in this document, including, without limitation, the specification and the design of the related semiconductor products, software and applications. Notwithstanding the foregoing, for any automotive grade version of the device, Dialog Semiconductor reserves the right to change the information published in this document, including, without limitation, the specification and the design of the related semiconductor products, software and applications, in accordance with its standard automotive change notification process.

Applications, software, and semiconductor products described in this document are for illustrative purposes only. Dialog Semiconductor makes no representation or warranty that such applications, software and semiconductor products will be suitable for the specified use without further testing or modification. Unless otherwise agreed in writing, such testing or modification is the sole responsibility of the customer and Dialog Semiconductor excludes all liability in this respect.

Nothing in this document may be construed as a license for customer to use the Dialog Semiconductor products, software and applications referred to in this document. Such license must be separately sought by customer with Dialog Semiconductor.

All use of Dialog Semiconductor products, software and applications referred to in this document is subject to Dialog Semiconductor's [Standard Terms and Conditions of Sale](#), available on the company website (www.dialog-semiconductor.com) unless otherwise stated.

Dialog, Dialog Semiconductor and the Dialog logo are trademarks of Dialog Semiconductor Plc or its subsidiaries. All other product or service names and marks are the property of their respective owners.

© 2020 Dialog Semiconductor. All rights reserved.

RoHS Compliance

Dialog Semiconductor's suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.

Contacting Dialog Semiconductor

United Kingdom (Headquarters)
Dialog Semiconductor (UK) LTD
Phone: +44 1793 757700

Germany
Dialog Semiconductor GmbH
Phone: +49 7021 805-0

The Netherlands
Dialog Semiconductor B.V.
Phone: +31 73 640 8822

Email
info_pcbg@diasemi.com

North America
Dialog Semiconductor Inc.
Phone: +1 408 845 8500

Japan
Dialog Semiconductor K. K.
Phone: +81 3 5769 5100

Taiwan
Dialog Semiconductor Taiwan
Phone: +886 281 786 222

Web site:
www.dialog-semiconductor.com

Hong Kong
Dialog Semiconductor Hong Kong
Phone: +852 2607 4271

Korea
Dialog Semiconductor Korea
Phone: +82 2 3469 8200

China (Shenzhen)
Dialog Semiconductor China
Phone: +86 755 2981 3669

China (Shanghai)
Dialog Semiconductor China
Phone: +86 21 5424 9058

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Dialog Semiconductor:](#)

[IW330-00](#) [IW330-02](#) [IW330-30](#) [IW330-32](#)