

# iDigi™ Professional Development Kit ZB

ZigBee Networking Development Kit for iDigi Platform

Cost-effective, out-of-the-box kit for the evaluation and development of ZigBee wireless sensor/device networks and the iDigi platform.



## Overview


The iDigi Professional Development Kit ZB includes all the hardware and software tools necessary to deploy and configure a ZigBee network through the iDigi platform. By using the iDigi platform, developers can rapidly deploy and manage their applications remotely across a ZigBee network through an IP connection, without programming middleware applications.

The iDigi Professional Development Kit ZB includes:

- 2 XBee® modules with interface boards
- 1 ConnectPort™ X4 gateway
- 1 XBee wall router
- Accessories

To see the full range of Digi's Drop-in Networking solutions, including off-the-shelf XBee adapters and cellular/Wi-Fi ConnectPort X gateways, please visit [www.digi.com/din](http://www.digi.com/din).

## Application Highlight

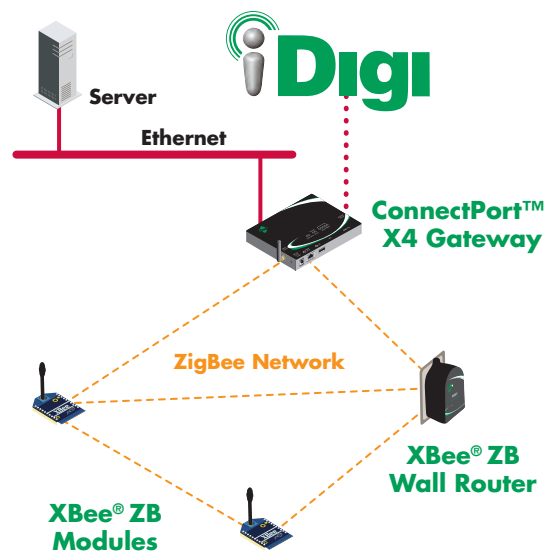

## Features/Benefits

- Easily configure a ZigBee sensor/device network out-of-the-box
- Provide IP connectivity to the ZigBee network with a ConnectPort X4 gateway
- Monitor light and temperature readings from the XBee wall router
- Seamlessly bridge your own applications to the ZigBee network using the iDigi platform

## Related Products




iDigi Solutions



Modules



Adapters



Gateways



Network Extenders



Accessories



Product Type		XBee® & XBee-PRO® ZB Modules	
Model	Regular	PRO	
<b>Performance</b>			
RF Data Rate	250 Kbps	250 Kbps	
Indoor/Urban Range	Up to 133 ft (40 m)	Up to 300 ft (90 m) / Int'l 200 ft (60 m)	
Outdoor/Line-of-Sight Range	Up to 400 ft (120 m)	Up to 1 mile (1.6 km) / Int'l 3200 ft (1 km)	
Transmit Power	1.25 mW (+1 dBm) / 2 mW (+3 dBm) boost mode	50 mW (+17 dBm) / Int'l 10 mW (+10 dBm)	
Receiver Sensitivity (1% PER)	-96 dBm in boost mode	-102 dBm	
<b>General</b>			
Frequency Band	2.4 GHz		
Sleep Modes	Low-power sleep modes enable power-down currents less than 10 uA		
Operating Temperature	-40° C to +85° C (Industrial)		
Product Type		ConnectPort™ X4 Gateway	
<b>General</b>			
Network Protocols	UDP/TCP, DHCP		
Interfaces	Physical: 1 RJ-45 Ethernet port, 1 serial DB-9 port, 1 USB port; RF: 1 XBee-PRO ZB module, 2.4 GHz		
LEDs	Ethernet status, Power, XBee link/activity		
Router/Security Features	NAT, Port Forwarding, Access Control lists (IP filtering)		
Management	HTTP web interface, Password access control, IP service port control, Optional secure enterprise management via Digi Connectware® Manager, Python application customization tool for programmability		
Product Type		XBee® ZB Wall Router	
<b>General</b>			
Antenna	Internal		
Locking Mechanism	Unit secures to power outlet using center outlet screw (U.S. only)		
LEDs	Power: Solid when external power is supplied; Associate: Blinks when unit is associated to an RF network		
Push Button	Device reset, Configuration reset to factory defaults, Identification/Commissioning mode		
<b>Integrated Temperature &amp; Light Sensor</b>			
Temperature Sensor	Range: -20° C to +70° C (-4° F to +158° F); Accuracy: +/- 2° C		
Ambient Light Sensor	Range of spectral bandwidth: 360 to 970 nm (similar to human eye); Wavelength of peak sensitivity: 570 nm		
<b>Power Requirements</b>			
Power Input	Universal AC input (85VAC to 265VAC)		

Visit [www.digi.com](http://www.digi.com) for part numbers.

**DIGI SERVICE AND SUPPORT** - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. [www.digi.com/support](http://www.digi.com/support)

**Digi International**  
877-912-3444  
952-912-3444  
[info@digi.com](mailto:info@digi.com)

**Digi International  
France**  
+33-1-55-61-98-98  
[www.digi.fr](http://www.digi.fr)

**Digi International  
KK**  
+81-3-5428-0261  
[www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**Digi International  
(HK) Limited**  
+852-2833-1008  
[www.digi.cn](http://www.digi.cn)



91001533  
A2/809

BUY ONLINE • [www.digi.com](http://www.digi.com)

© 2009 Digi International Inc. All rights reserved. Digi, Digi International, the Digi logo, M2M logo, ConnectPort, XBee and XBee-PRO are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Digi International:](#)

[XK-Z11-PD](#)