

May 16, 2012

www.semtech.com

FAST RECOVERY, LOW CURRENT 3-PHASE FULL WAVE BRIDGE RECTIFIER ASSEMBLIES

- Low forward voltage drop
- Low reverse leakage current
- Subminiature design
- V_{RWM} up to 2500V
- PCB mounting


QUICK REFERENCE DATA

- $V_R = 50V - 2500V$
- $I_F = 0.5 - 2.0A$
- $I_R = 3.0\mu A$
- $t_{rr} = 150 - 300nS$

ABSOLUTE MAXIMUM RATINGS & CHARACTERISTICS

Device Type	Working Reverse Voltage V_{RWM}	Average Rectified Current $I_{F(AV)}$		Reverse Leakage Current $I_R @ V_{RWM}$		Forward Voltage drop / leg @ 25°C $V_F @ 1A$ * @ 100mA	Reverse Recovery Time t_{rr} @ 25°C
		@ 55 °C	@ 100 °C	@ 25 °C	@ 100 °C	Volts	nS
	Volts	Amps	Amps	μA	μA		
S3BR05F	50	2.0	1.2	3.0	75	1.2	150
S3BR1F	100	2.0	1.2	3.0	75	1.2	150
S3BR2F	200	2.0	1.2	3.0	75	1.2	150
S3BR4F	400	2.0	1.2	3.0	75	1.2	150
S3BR6F	600	2.0	1.2	3.0	75	1.2	250
S3BR25F	2500	0.5	0.3	3.0	75	* 5.0	300

MECHANICAL

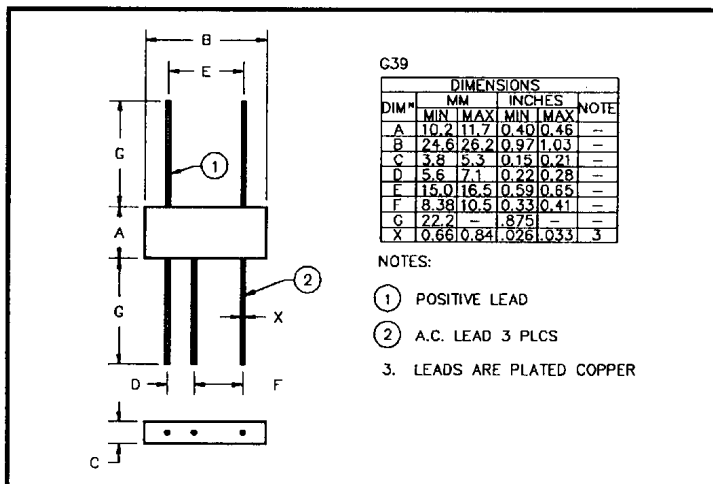
¹ Measured on discrete devices prior to assembly

S3BR4F is available in Europe to
DEF-STAN 59-61/90/214

May 16, 2012

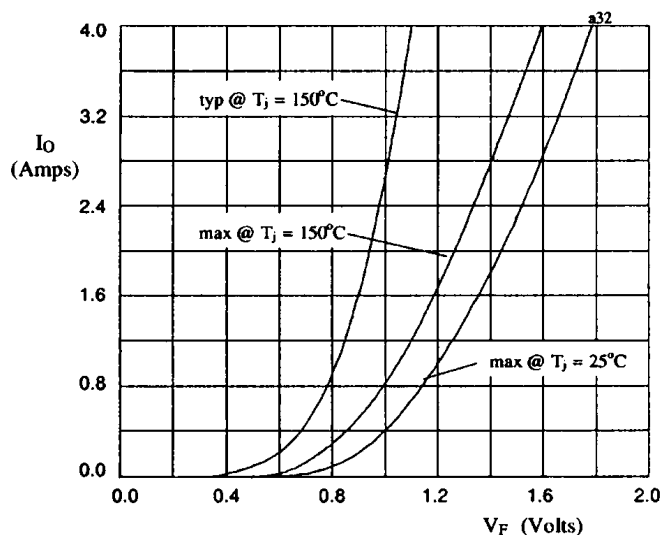


Fig 1. Forward voltage drop against output current per leg for S3BR05F thru S3BR6F.

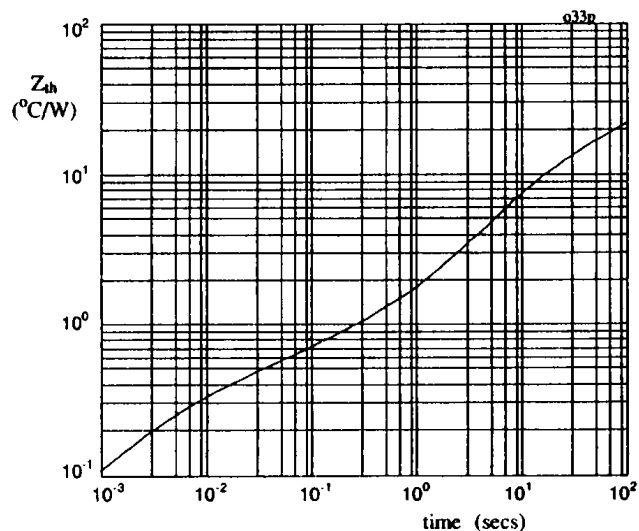


Fig 2. Transient thermal impedance characteristic per leg for S3BR05F thru S3BR6F

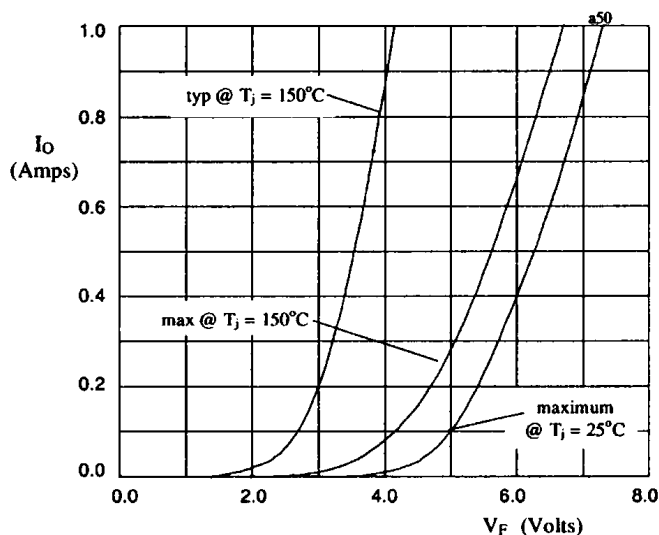


Fig 3. Forward voltage drop against output current per leg for S3BR25F.

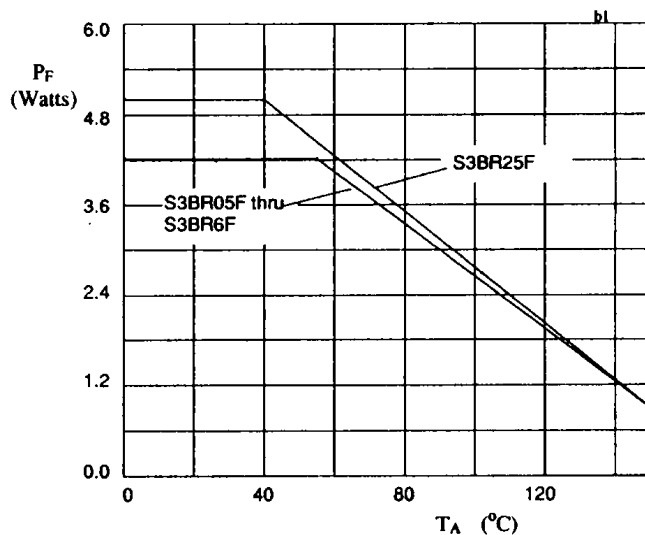


Fig 4. Power derating characteristics when p.c.b mounted

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Semtech:](#)

[S3BR8F](#) [S3BR25F](#) [S3BR2F](#)