



PI3DBS16215

3.3V, 1-20Gbps 1-Lane 2:1 Mux/De-Mux Switch

Features

- → Two Differential Channel, 2:1 Mux/DeMux
- → Up to 20Gbps for Applications Including USB3.0, USB3.1, 10GE, Thunderbolt 3, and SAS3.0
- → Bidirectional Operation
- → 3dB Bandwith: 14 GHz
- → Low Bit-to-Bit Skew, 1ps typ
- → Low Channel-to-Channel Skew, 7ps typ
- → Low Insertion Loss: -1.3dB @ 5GHz, -1.3dB @ 8GHz,
- → -2dB @ 10GHz
- → Return Loss: -21dB @ 5GHz, -13dB @ 8GHz, -9dB @ 10GHz
- → Low-Power Consumption 300µA typ
- → Supply Voltage 3.3V
- → Industrial Temperature Range: -40°C to 85°C
- → Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- → Halogen and Antimony Free. "Green" Device (Note 3)
- → Packaging (Pb-free & Green):
 - 20-contact, TQFN (ZBB20), 2.5mm × 4.5mm


Description

The PI3DBS16215 is a 4-to-2 differential channel multiplexer/demultiplexer switch. This solution can switch multiple signal types up to data rate of 20Gbps. Using a unique design technique, Diodes is able to minimize the impedance of the switch, so the attenuation observed through the switch is minimal. The unique design technique also offers a layout targeted for USB3.0, USB3.1, 10GE, Thunderbolt 3, and SAS3.0 signals, which minimizes the channelto-channel skew as well as channel-to-channel crosstalk as required by high-speed signals.

Applications

Routing high-speed differential signals, such as USB3.1 Gen 2, SAS3, PCle4, TB3

Block Diagram

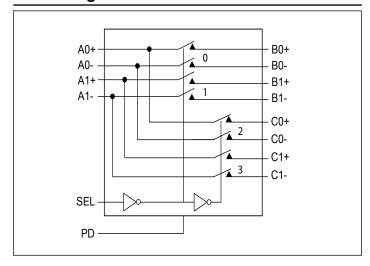

Ordering Information

Part Number	Package	Description
PI3DBS16215ZBBEX	ZBB	20-Contact, Very-Thin Quad-Flat No-Lead (TQFN)

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.

 2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes
- 2. See Infigs://www.diodaes.com/qdaily/ledd-riee/ for more information about Diodaes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.

 3. Halogen- and Antimony-free "Green" products are defined as those which contain < 900ppm bromine, < 900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

 4. E = Pb-free and Green

 5. X suffix = Tape/Reel

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diodes Incorporated:
PI3DBS16215ZBBEX