

SOTiny™ Low-Voltage, Single-Supply, 8Ω SPST CMOS Analog Switches

Features

- 8Ω max. On-Resistance
- 1.0Ω max. On-Resistance Flatness
- Fast Switching
 - $t_{ON} = 28\text{ns max.}$
 - $t_{OFF} = 35\text{ns max.}$
- Guaranteed 5pC max. Charge Injection
- +2.0V to +5.5V Single-Supply Operation
- 300 MHz -3dB Bandwidth at +25°C
- TTL/CMOS-Logic Compatible
- 80dB Off-Isolation at 1MHz
- 0.5nA max. Off-Leakage
- 0.05% THD
- Packaging (Pb-free & Green available):
 - 5-pin SC70 (C)
 - 5-pin SOT-23 (T) - 4594A only

Description

PI5A4594A/PI5A4596A are single-pole/single-throw (SPST) analog switches that operate from a single +2.0V to +5.5V supply. The PI5A4594A/PI5A4596A switches are normally open (NO), and the PI5A4595A/PI5A4597A are normally closed (NC). The PI5A4596A/PI5A4597A pinouts are optimized for the highest SC70 package off-isolation available.


These switches have 10Ω max On-Resistance (R_{ON}), with 1.5Ω max R_{ON} flatness over the analog signal range when powered from a +5V supply. Leakage currents are 0.5nA and fast switching times are less than 40ns. They are packaged in a compact 5-pin SC70 package.

Applications

- Communications Circuits
- Cellular Phones
- Battery-Operated Equipment
- DSL Modems
- Audio and Video Signal Routing
- PCMCIA Cards

Block Diagrams/Pin Configurations/Truth Table

Top Views

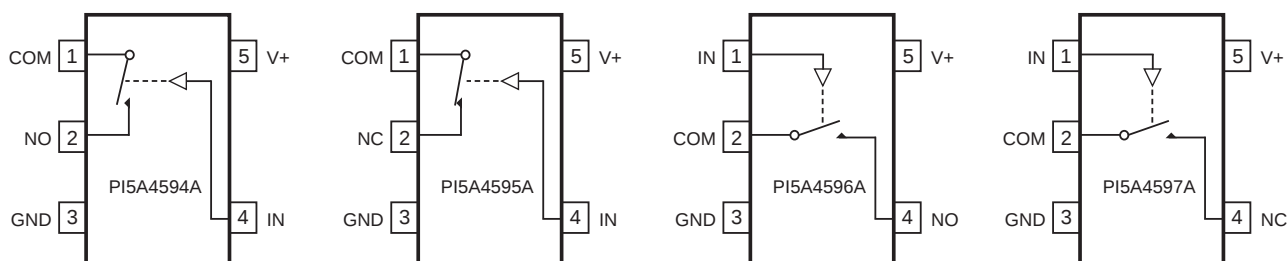

Switches shown for Logic "0" input.

Input	Switch State	
	PI5A4594A/PI5A4596A	PI5A4595A/PI5A4597A
LOW	OFF	ON
HIGH	ON	OFF

Pin Description

Pin				Name	Function
PI5A4594A	PI5A4595A	PI5A4596A	PI5A4597A		
1	1	2	2	COM	Analog Switch, Common
2	–	4	–	NO	Analog Switch, Normally Open
3	3	3	3	GND	Ground
4	4	1	1	IN	Digital Control Input
5	5	5	5	V+	Positive Supply Voltage
–	2	–	4	NC	Analog Switch, Normally Closed

Note: NO, NC, and COM pins are identical and interchangeable. Any pin may be considered as an input or an output; signals pass

Maximum Ratings (Above which the useful life may be impaired. For user guidelines, not tested)

Voltage (Referenced to GND V+) -0.3 to +6.0V
 Voltage into Any Terminal (Note 1)..... -0.3 to (V++0.3V)
 Continuous Current into Any Terminal ±20mA
 Peak Current, NO, NC, or COM
 (pulsed at 1ms, 10% duty cycle) ±40mA
 Continuous Power Dissipation (T_A = +70°C)
 5-pin SC70 (derate 3.1mW/°C above +70°C) 247mW
 Operating Temperature
 PI5A459_EXK..... -40 to +85°C
 Storage Temperature..... -65 to +150°C
 Soldering Temperature (Max of 10 seconds) +300°C

Note:

1. Voltages exceeding V+ or GND on any signal terminal are clamped by internal diodes. Limit forward-diode current to maximum current rating.

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Electrical Characteristic - +5V Supply (V+ = +4.5V to +5.5V, V_{IH} = +2.4V, V_{IL} = +0.8V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at V+ = +5V, T_A = +25°C.) ^(2,3)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Units
Analog Signal							
Analog Signal Range	V _{COM} , V _{NO} , CNC			0		V+	V
On Resistance	R _{ON}	V+ = 4.5V, V _{NO} , or V _{NC} = 3.5V, I _{COM} = 10mA	T _A = +25V		5	8	Ω
			T _A = T _{MIN} to T _{MAX}			10	
On-Resistance Flatness ⁽⁴⁾	R _{FLAT} (ON)	V _{NO} or V _{NC} = 1.5V, 2.5V, 3.5V; V+ = 4.5V; I _{COM} = 10mA	T _A = +25V		0.5	1.0	
			T _A = T _{MIN} to T _{MAX}			1.5	

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Units
Analog Signal Range	V _{COM} , V _{NO} , CNC			0		V+	V
On Resistance	R _{ON}	V ₊ = 4.5V, V _{NO} , or V _{NC} = 3.5V, I _{COM} = 10mA	T _A = +25V		5	8	
			T _A = T _{MIN} to T _{MAX}			10	
On-Resistance Flatness(4)	R _{FLAT (ON)}	V _{NO} or V _{NC} = 1.5V, 2.5V, 3.5V; V ₊ = 4.5V; I _{COM} = 10mA	T _A = +25V		0.5	1.0	Ω
			T _A = T _{MIN} to T _{MAX}			1.5	
NO or NC Off Leakage Current	I _{NO (OFF)} I _{NO (OFF)}	V ₊ = 5.5V; V _{COM} = 1V, 4.5V; V _{NO} or V _{NC} = 4.5V, 1V	T _A = +25V	-0.5	0.01	0.5	nA
			T _A = T _{MIN} to T _{MAX}	-5		5	
COM-Off Leakage Current	I _{COM (OFF)}	V ₊ = 5.5V; V _{COM} = 1V, 4.5V; V _{NO} or V _{NC} = 4.5V, 1V	T _A = +25V	-0.5	0.01	0.5	
			TA = T _{MIN} to T _{MAX}	-5		5	
COM On Leakage Current	I _{COM (ON)}	V ₊ = 5.5V; V _{COM} = 1V, 4.5V; V _{NO} or V _{NC} = 1V, 4.5V, or float- ing	T _A = +25V	-1	0.01	1	
			T _A = T _{MIN} to T _{MAX}	-10		10	
Digital I/O							
Input Logic High	V _{IH}			2.4			V
Input Logic Low	V _{IH}					0.8	
Input Logic Current	I _{IH} , I _{IL}	V _{IN} = V+, 0		-1		1	μA
Dynamic							
Turn-On Time	tON	V _{NO} or V _{NC} = 3V, RL = 300Ω, CL = 35pF, Figure 3	T _A = +25V		20	28	ns
			T _A = T _{MIN} to T _{MAX}			38	
Turn-Off Time	tOFF	V _{NO} or V _{NC} = 3V, RL = 300Ω, CL = 35pF, Figure 3	T _A = +25V		25	35	
			T _A = T _{MIN} to T _{MAX}			42	
On-Channel -3dB Bandwidth	BW	Signal = 0dBm, 50Ω in and out, Figure 4	T _A = +25V		300		MHz

Electrical Characteristic - +5V Supply (continued) – (Typical values are at $V_+ = +5V$, $T_A = +25^\circ C$.) (2, 3)
 ($V_+ = +4.5V$ to $+5.5V$, $V_{IH} = +2.4V$, $V_{IL} = +0.8V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Units	
Charge Injection ⁽⁵⁾	Q	V _{NO} or V _{NC} = 0, CL = 1nF, Fig. 2	T _A = +25°C			2	5	pC
Off Isolation ⁽⁶⁾	V _{ISO}	V _{NO} or V _{NC} = 1V _{RMS} , RL =50Ω, CL = 5pF, f = 1MHz, Fig. 4	T _A = +25°C	PI5A4594/ PI5A4595		80		dB
				PI5A4596/ PI5A4597		83		
NO or NC Off Capacitance	C _{NO (OFF)} , C _{NC(OFF)}	V _{NO} or V _{NC} = 0, f = 1MHz, Fig. 5	T _A = +25°C			8		pF
COM Off Capacitance	C _{COM (OFF)}	V _{COM} = 0V, f =1MHz, Fig .5	T _A = +25°C			8		
COM On Capacitance	C _{COM(ON)}	V _{COM} = 0V, f =1MHz, Fig .5	T _A = +25°C			20		
Total Harmonic Distortion Plus Noise	THD	V = 5Vp-p, RL = 600Ω f = 20Hz to 20kHz	T _A = +25°C			0.2		%
Power Supply								
Power-Supply Range	V+				2.0		5.5	V
V+ Supply Current	I+	V+ = 5.5V, V _{IN} = 0 or V+	TA = T _{MIN} to T _{MAX}				1	μA

Electrical Characteristics - Single 3V Supply

(V₊ = +3V ±10%, V₋ = 0V, GND = 0V, V_{AH} = V_{IH} = +2.0V, V_{AL} = V_{IL} = +0.5V)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Units
Analog Switch							
Analog Signal Range ⁽³⁾	V _{COM} , V _{NO} , V _{NC}			0		V+	V
On-Resistance	R _{ON}	V _{NO} or V _{NC} = 1.5V,	T _A = +25°C			15	W
		I _{COM} = 10mA, V+ = 2.7V	T _A = T _{MIN} to T _{MAX}			20	
Digital I/O							
Inut Logic High	V _{IH}			2.0			V
Input Logic Low	V _{IL}					0.8	
Input Logic Current	I _{IH} , I _{IL}	V _{IN} = V+, 0		-1	0.03	1	μA
Dynamic							
Turn-On Time	t _{ON}	V _{NO} or V _{NC} = 2V, R _L = 300Ω, C _L = 35pF, Fig.3	T _A = +25°C		25	45	ns
			T _A = T _{MIN} to T _{MAX}			55	
Turn-Off Time	t _{OFF}	V _{NO} or V _{NC} = 2V, R _L = 300Ω, C _L = 35pF, Fig.3	T _A = +25°C		30	50	
			T _A = T _{MIN} to T _{MAX}			60	
Charge Injection ⁽⁵⁾	Q	V _{NO} or V _{NC} = 0, C _L = 1nF, Fig. 2	T _A = +25°C		2	4	pC
Power Supply							
V+ Supply Current	I+	V+ = 3.6, V _{IN} = 0 or V+	T _A = T _{MIN} to T _{MAX}			1	μA

Notes:

- Parameters are 100% tested at +25°C only, and guaranteed by correlation at the full-rated temperature.
- Algebraic convention is used in this data sheet; the most negative value is shown in the minimum column.
- Flatness: the difference between maximum & minimum values of ON-resistance measured over specified analog signal ranges.
- Guaranteed by design.
- Off-Isolation = 20log₁₀ (V_{COM} / V_{NO}), V_{COM} = output, V_{NO} = input to off switch.

Applications Information

Analog Signal Levels

Analog signals can range over the supply voltage ($V+$ to GND) with ON-resistance changing very little over the entire range. The PI5A4594A–PI5A4597A are bidirectional, so the NO, NC, and COM pins can be used either as inputs or outputs.

Test Circuits/Timing Diagrams

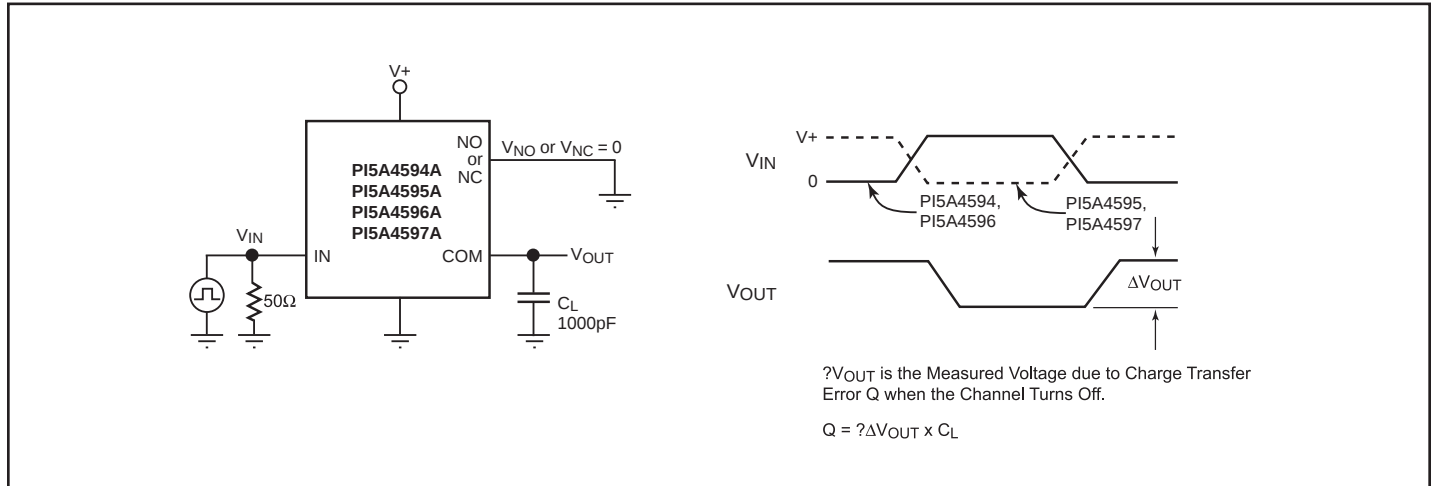


Figure 2. Charge Injection

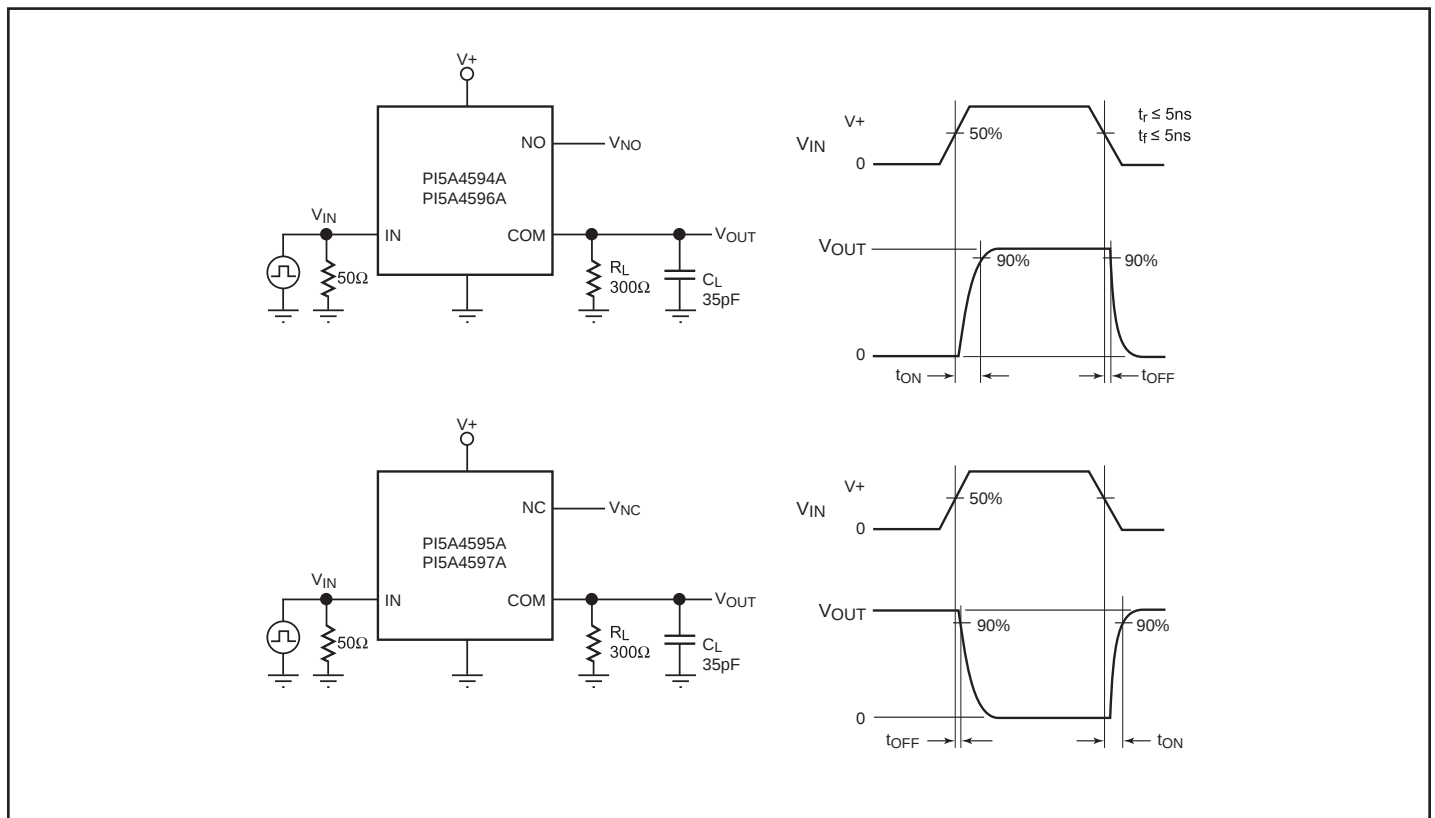


Figure 3. Switching Times

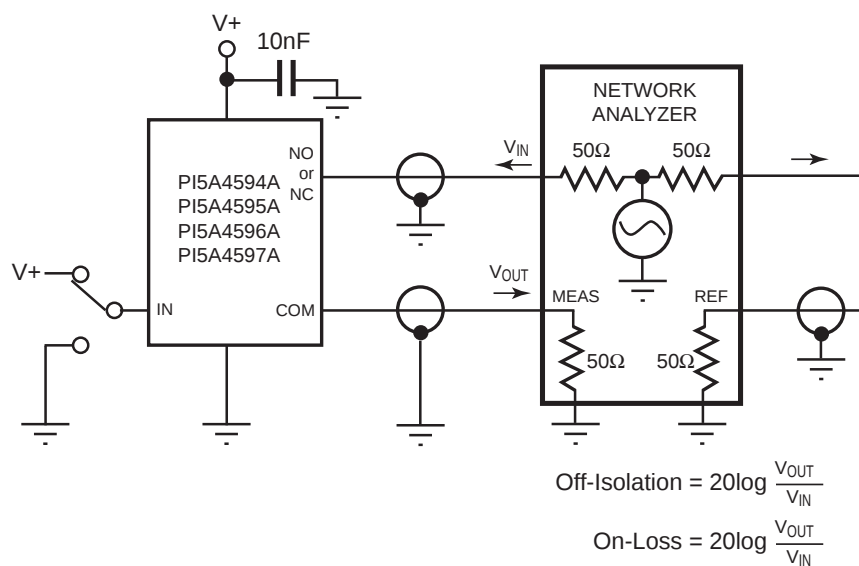


Figure 4. Off-Isolation and On-Channel Bandwidth


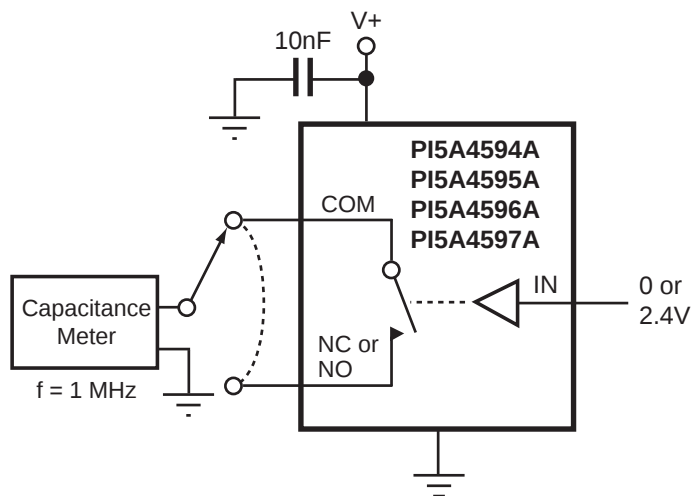



Figure 5. Channel On-/Off Capacitance

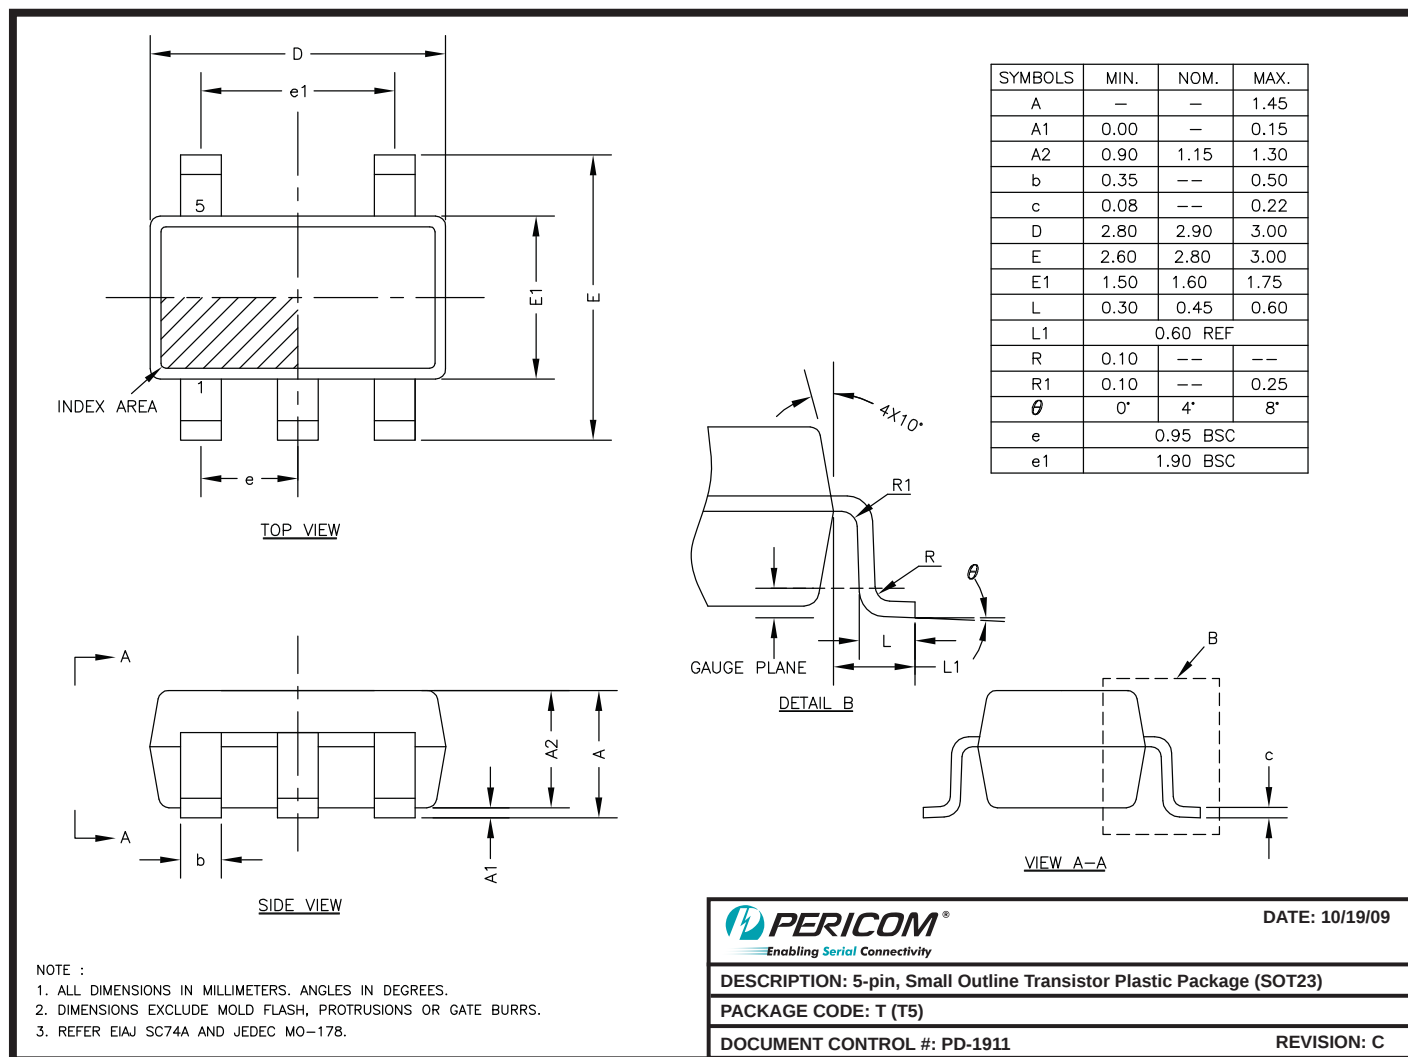

09-0130

Note:

- For latest package info, please check: <http://www.pericom.com/products/packaging/mechanicals.php>

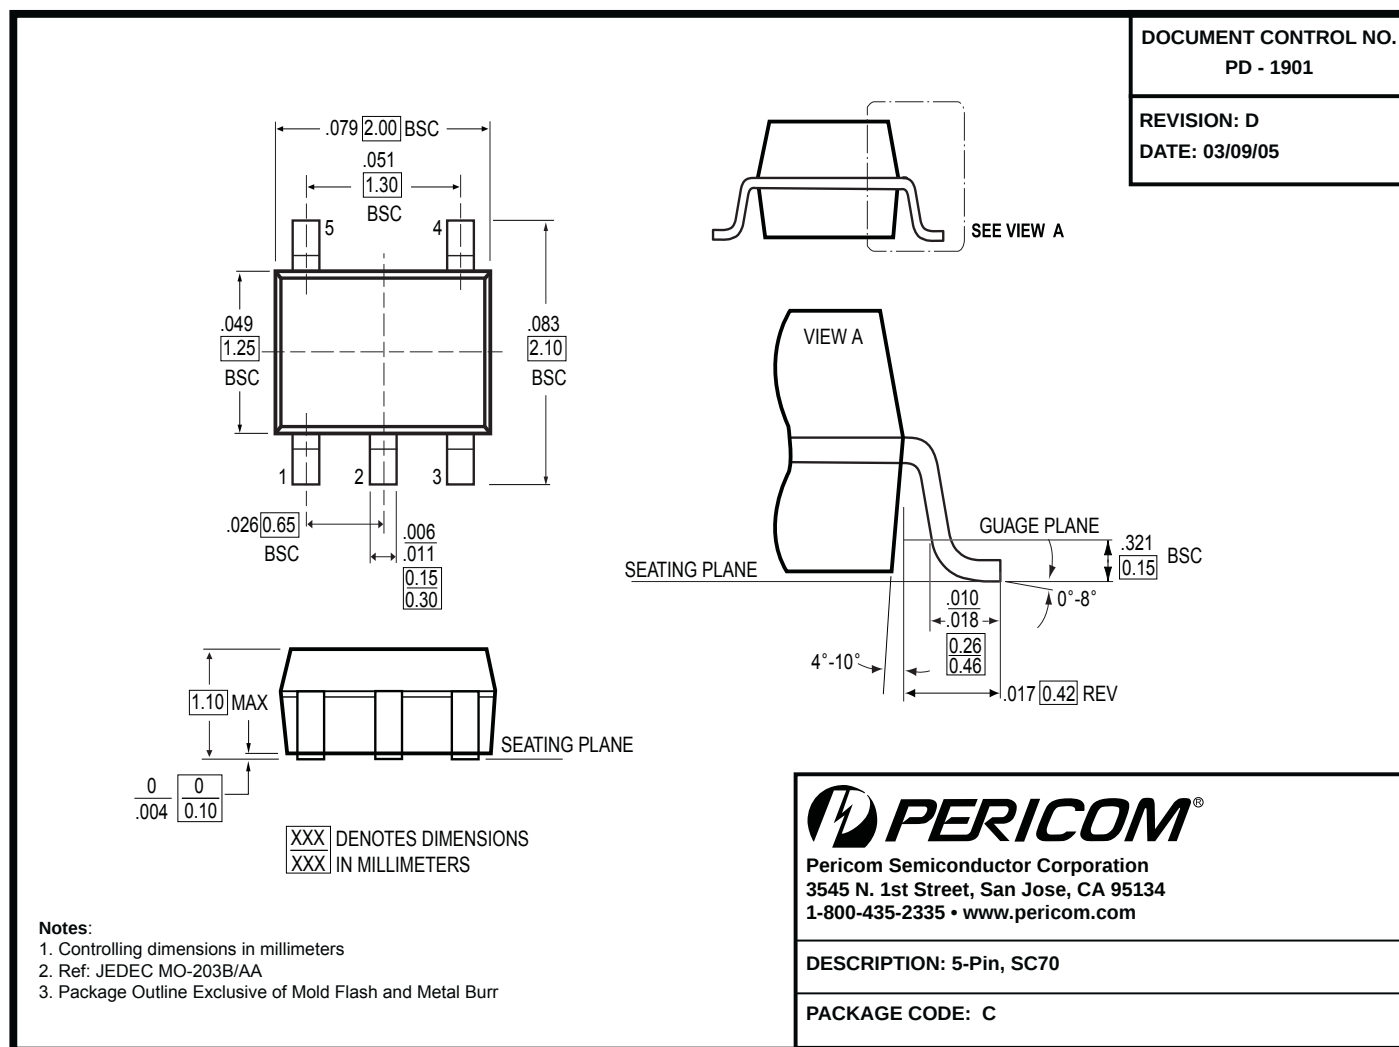

Note:

- For latest package info, please check: <http://www.pericom.com/products/packaging/mechanicals.php>

Ordering Information

Ordering Code	Package Code	Package Type	Top Marking
PI5A4594ACE+COX	C	Pb-free & Green, 5-pin SC70	ZR
PI5A4595ACEX	C	Pb-free & Green, 5-pin SC70	ZQ
PI5A4596ACEX	C	Pb-free & Green, 5-pin SC70	ZP
PI5A4597ACEX	C	Pb-free & Green, 5-pin SC70	ZO
PI5A4594ATE+COX	T	Pb-free & Green, 5-pin SOT23	ZR

1. Thermal characteristics can be found on the company web site at www.pericom.com/packaging/
2. E = Pb-free and Green
3. X = Tape and reel

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Diodes Incorporated:](#)

[PI5A4594ACEX](#) [PI5A4596ACEX](#)