



SNYPER-LTE Graphyte (USA) V1/V2

4G/LTE & 3G/UMTS Signal Analyser & Datalogger with liveSCAN

General Description

The SNYPER-LTE Graphyte (USA) is a high performance, multi-language network signal analyser and cellular signal logger, dedicated to surveying and logging the 4G/LTE (USA) & 3G/UMTS North American networks.

The unit can be left to conduct sequential surveys in a fixed location and automatically save them. Three types of survey can be performed: a "FULL" survey (4G and 3G), 4G/LTE only & 3G/UMTS only.

SNYPER-LTE Graphyte (USA) can save multiple surveys each with different logging options. All survey results can be downloaded to a PC and displayed in a HTML graphical format to clearly show the logged detail over the survey session. This can identify unreliable base-stations & intermittent cellular service which is not possible with spot surveys. The full breakdown for the HTML summary graphs are displayed in corresponding CSV files.

The SNYPER-LTE Graphyte (USA) also incorporates Siretta's leading liveSCAN feature, which allows you to select a base-station signal immediately after a survey, conduct a liveSCAN logging session which can later be analysed in a CSV logged recording.

The SNYPER-LTE Graphyte (USA) is compatible with Siretta's [CloudSURVEY](#) integrated mapping portal (registration required).



* Neither SNYPER-LTE Graphyte (USA) V1 nor SNYPER-LTE Graphyte (USA) V2 require a SIM in order to function.

Features

3G UMTS	4G LTE	USA Coverage	GEAR Accessories	HARD Carry Case	SIM Free				
USB Power	USB Serial	HTML Reports	CSV Reports	LOG Surveys	LIVE SCAN Logs	AUTO SAVE Logs	RTC Timestamp	MAP Portal	
TFT Display	2Ah Battery	Win Linux/Mac	MNO Summary	SAVE 84 Surveys	MULTI Language	SCAN Realtime	P2P Alignment	-10 +50 deg C	

Featured Applications

- » Enhanced cellular surveying & sequential logging of new and existing installations on 4G/3G networks
- » User selectable logging options to determine most reliable mobile operator
- » Evaluate MNO's performance over time
- » Determine "hotspots" & assist with antenna alignment with liveSCAN
- » CSV & graphical HTML survey reports
- » Saves up to 84 single cycle surveys
- » Saves LiveSCAN logs
- » Integrated Mapping Portal enabled (registration required)

SNYPER LTE- Graphyte (USA) V1/V2
Save up to 84 surveys



USB Connection
Download CSV & HTML Files

Downloaded HTML Survey Results





SNYPER-LTE Graphyte (USA) V1/V2

4G/LTE & 3G/UMTS Signal Analyser & Datalogger with liveSCAN

General Features

- » SNYPER-LTE Graphyte (USA) V1
 - » 2 Supported Bands UMTS/HSPA+:
B5(850) / B2(1900)
 - » 4 Supported Bands LTE (MHz):
B12-B13(700) / B5(850) / B4(1700) /
B2(1900)
- » SNYPER-LTE Graphyte (USA) V2
 - » 3 Supported Bands UMTS/HSPA+ (MHz):
B5(850) / B4(1700) / B2(1900)
 - » 8 Supported Bands LTE (MHz):
B71(600) / B12-B13(700) / B14(700) /
B5(850) / B4(1700) / B66(1700) / B2(1900)
- » Black antenna for 700MHz to 2300MHz
- » Directional antenna for 3G and 4G coverage with 1.5m extension cable
- » Large easy to read LCD display
- » Logical menus and operation
- » Long life rechargeable battery
- » USB battery charger included
- » USB car charger included
- » Rugged and durable construction
- » Supplied in a hard carrycase
- » Multiple language support
(English/French/German/Italian/Spanish)
- » 3 result modes:
Standard/Advanced/Engineer
- » USB cables for PC connection and power

Interfaces

- » 1 x USB 2.0 FS (12 Mbits/s) for PC interface and for battery charging
- » 1 x SMA female cellular antenna connector
- » 1 x SIM card reader (push-push) 3V, 1.8V
- » Red LED charging indicator
- » Display: 2.4" Diagonal QVGA 240 x 320 RGB TFT with LED backlight
- » Display: 80 degree viewing angle
- » Display Brightness: 500md/m2

Approvals and Compliance

- » FCC

Power Supply

- » Mains Input: 100-240V 50/60Hz
- » Multi-region Heads: UK / EU /US / AU
- » Charger O/P: 5V DC 2000mA

Environmental

- » Dimensions
SNYPER: 141mm x 76mm x 36mm
Compact antenna: 78mm x 11mm
Directional antenna: : 167mm x 173mm x 27mm
- » Weight
Without antenna: 200 grams
With supplied compact antenna: 207 grams
- » Operating Temperature Range: -10 to +50 deg C
- » Storage Temperature Range: -20 to +50 deg C
- » Operating Humidity Range: 20 to 85% RH Non-condensing
- » Battery: Lithium Ion 3.7V, 2000mAh
- » Life: 48 hours based on 20 surveys /day at room temperature with auto power off enabled





SNYPER-LTE Graphyte (USA) V1/V2

4G/LTE & 3G/UMTS Signal Analyser & Datalogger with liveSCAN

Reporting

Survey Logging

- » Select survey sessions from 1 to 500 sequential recorded surveys
- » Select back-to-back or time lapsed sequential survey recording
- » Calculate seen percentages and signal averages for entire surveyed session

HTML Reporting

- » Graphical display ordered by signal strength
- » Complete summary breakdown for all recorded cells
- » Recorded survey date and time
- » Integrated mapping portal enabled (registration required)

CSV Reporting


- » Complete survey breakdown for each recorded cell

liveSCAN Reporting

- » Real-time graphical display on SNYPER screen
- » Highlight cellular hotspots and optimised antenna alignment using real-time graph peaks for selected network

liveSCAN Logging

- » Record timestamped liveSCAN readings in real time directly to CSV file
- » Recorded time elapsed and signal strength in percentage, RSSI and dBm for chosen cell site

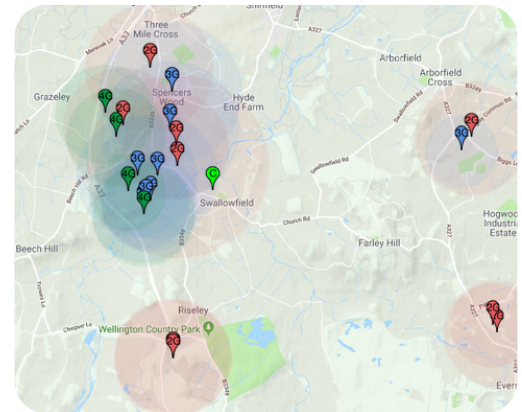

Integrated mapping portal (registration required)



Portable carrycase

Ordering Information

- » SNYPER-LTE Graphyte (USA) V1: Stock Code: 60740
- » SNYPER-LTE Graphyte (USA) V2: Stock Code: 61196

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siretta:

[SNYPER-LTE GRAPHYTE \(USA\) V2](#) [SNYPER-LTE Graphyte \(USA\)](#)