


Tangential blowers

QLN 65

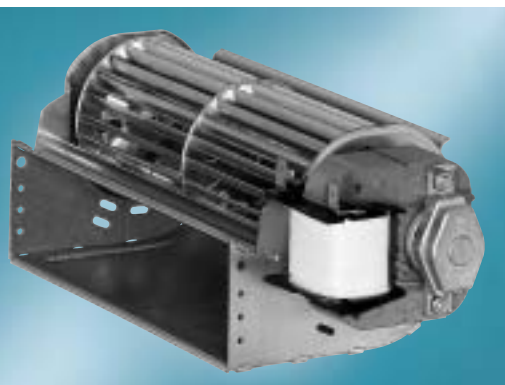




- impeller diameter 65 mm
- horizontal or vertical mounting position with motor at the bottom
- permissible ambient temperature 0 - 60°C
- insulation class B, class F or H on request

ebm-papst • Landshut

Nominal data		characteristic curve	rated voltage	frequency	air flow	max. pressure increase	power input	rated current	speed	mass	Dimensions mm					
motor right*	motor left		V	Hz	m³/h	Pa	W	mA	min⁻¹	kg	a	b	c	d	e	f
QLN65/1200-3015	QLN65/0012-3015	①	230	50	83	50	14	135	1300	0,90	196	49	122	139	94	-
QLN65/1800-3025	QLN65/0018-3025	②	230	50	170	80	30	270	1500	1,20	266	59	182	199	154	77
QLN65/2400-3030	QLN65/0024-3030	③	230	50	220	80	38	360	1200	1,45	331	65	242	259	212	106
QLN65/3000-3038	QLN65/0030-3038	④	230	50	250	80	45	415	1200	1,75	400	73	302	319	272	136

*) Corresponding to dimensional drawing; Technical data valid at free air flow and rated voltage; bold print = standard type; subject to alterations

Characteristic curves

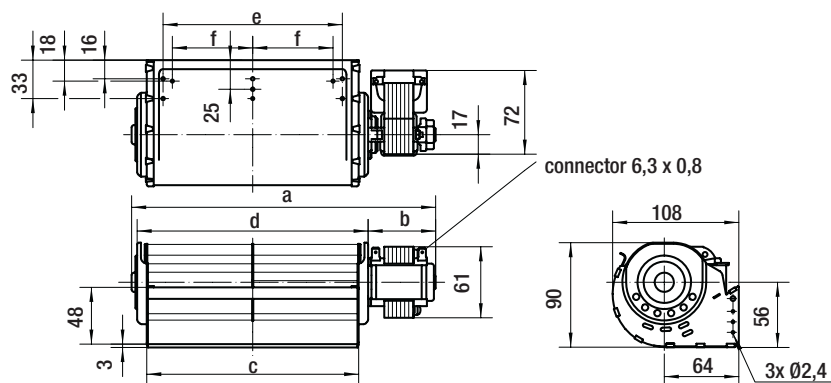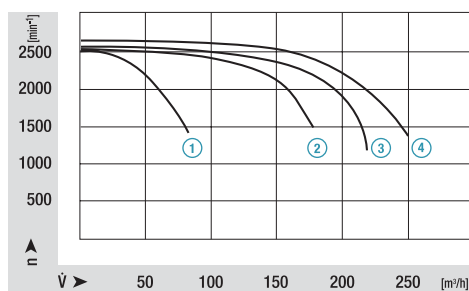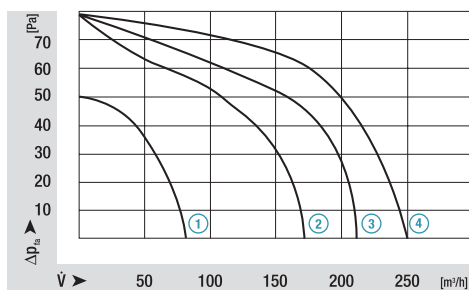

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ebm-papst:](#)

[55416.29089](#) [55416.34099](#) [55416.35031](#) [55416.17101](#) [55416.3032](#) [55416.2707](#) [55416.3213](#) [55416.29079](#)
[55416.2517](#) [55416.3707](#) [55416.25078](#) [55416.2725](#) [55416.3025](#) [55416.1702](#) [55416.3208](#) [55416.3216](#) [55416.1709](#)
[55416.30199](#) [55416.17021](#) [55416.2535](#) [55416.3507](#) [55416.25170](#) [55416.27250](#) [55416.25350](#) [55416.35070](#)
[55416.37070](#) [55416.27070](#)