
12.60	7.90	2.84			-	53.00 ±0.35 47.040 38.40
			-	(
=			1.38	35 - '0°		2.77




TOLEF UNLESS OF SPEC	TOLERANCE UNLESS OTHERWISE SPECIFIED				
.X	±0.25				
.XX	±0.13				
.XXX	±0.10				

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

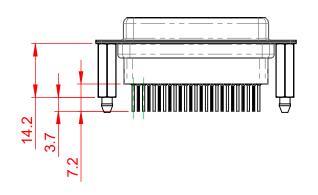

ISSUE NUMBER ORIGINAL

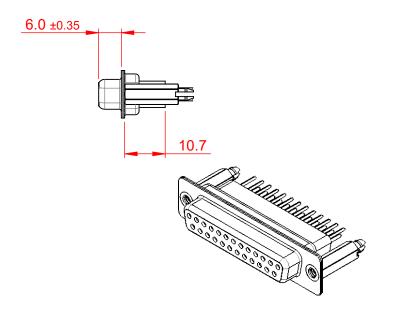

NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

PART NUMBER:

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, 30µ GOLD PLATED OPERATING TEMPERATURE: -55°C to +85°C

CURRENT RATING: 3A PER CONTACT CONTACT RESISTANCE: 25mΩ MAX. INSULATOR RESISTANCE: $5000M\Omega$ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



EDAC INC TORONTO, ONTARIO CANADA

628 SERIES D-SUB CONNECTOR

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 628 A	628 ASSEMBLY			
DRAWN: C.B	DATE: AUG. 01/2018			
CHECKED:	DATE:			
SCALE: 1:1	SHEET 1 OF 1			
DRAWING NUMBER: 628-025-0	671-056 ISSUE			

628-025-671-056

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDAC:

628-025-671-056