
**Mounting Option Contact Detail** 

07-M3-0.5 Metric Threaded Inserts

520-P.C. Tail .030x.018(0.76x0.46) - Tail LG=.175(4.45)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

4.537 [115.24] 4.376[111.15] -Card Slot Accepts .054 [1.37] to .070 (1.78) Thick P.C. Board 0.370 [9.40]

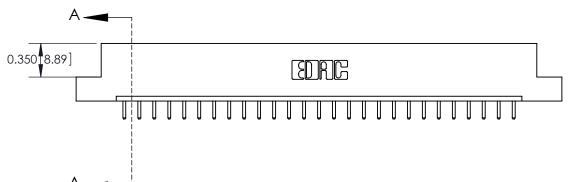



0.388 [9.86] Card Slot .160 [4.06] Point of Contact-**SECTION A-A** 

## See Accompanying Page for:

- **Bend Detail**
- **Mounting Options**
- **Features and Specifications**

333 Series Card Edge Connector Part Number: 333-027-520-107

YOUR CONNECTION TO QUALITY & SERVICE

	ACAD REFERENCE NO. 333 ENG MASTER		
	DRAWN: J.LEE	DATE: OCT. 14/09	
	CHECKED:	DATE:	
	SCALE: NTS	SHEET 1 OF 4	
D	DRAWING NUMBER	ISSUE	

333 Assembly

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER

ORIGINAL

1



333 Series Card Edge Conn	ACAD REFERENCE NO. 333 ENG MASTER			
Contact Bend Detail	DRAWN: J.LEE	DATE: OCT. 14/09		
Contact bend Detail		CHECKED:	DATE:	
EDAC INC	O, ONTARIO  ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: NTS	SHEET 2	2 OF 4
TORONTO, ONTARIO		DRAWING NUMBER		ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		333 Assembly		1

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER



SSUE NUMBER

DRIGINAL

1



	333 Series Card Edge Connector			ACAD REFERENCE NO. 333 ENG MASTER			
		DRAWN:	J.LEE	DATE: O	CT. 14/09		
	Mounting Options		CHECKED:		DATE:		
			THESE DRAWINGS AND SPECIFICATIONS	SCALE:	NTS	SHEET :	3 OF 4
		LIPUS TORONTO, ONTARIO CANADA	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING	NUMBER		ISSUE
	YOUR CONNECTION TO QUA			3	33 Assembly		1

ISSUE NUMBER

ORIGINAL



## **Features**

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

333 Series Card Edge Connector	ACAD REFERENCE NO. 333 ENG MASTER
Features and Specifications	DRAWN: J.LEE DATE: OCT. 14/09
realities and specifications	CHECKED: DATE:
	WINGS AND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4
I SI I I ORONTO, ONTARIO SHALL NOT	BE REPRODUCED, OR COPIED DRAWING NUMBER ISSUE
	JRE OR SALE OF APPARATUS 333 Assombly 1

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDAC:

333-027-520-107