

Mounting Option

01-No Mounting Lugs


Contact Detail

558-90 Degree Bend (Code 541 Contacts) .156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

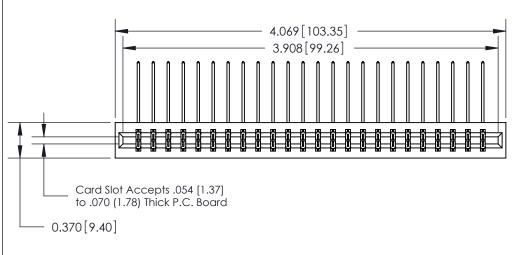

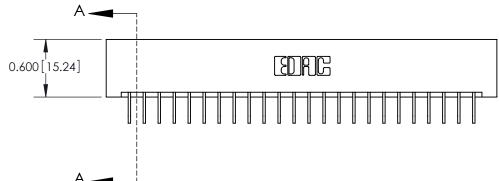



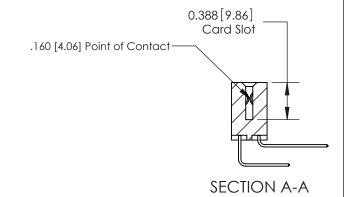

See Accompanying Page for:

- **Bend Detail**
- **Mounting Options**
- **Features and Specifications**

333 Series Card Edge Connector Part Number: 333-048-558-201



YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIEI
ARE THE PROPERTY OF EDAC INC.,AND
SHALL NOT BE REPRODUCED,OR COPIEI
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

	ACAD REFERENCE NO	. 333 ENG MASTER
	DRAWN: J.LEE	DATE: OCT. 14/09
	CHECKED:	DATE:
	SCALE: NTS	SHEET 1 OF 4
0	DRAWING NUMBER	ISSUE

333 Assembly

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER

ORIGINAL

1



333 Series Card Edge Conn	ACAD REFERENCE NO. 333 ENG MASTER			
		DRAWN: J.LEE	DATE: OCT. 14/09	
		CHECKED:	DATE:	
EDAC INC	TORONTO, ONTARIO ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED	SCALE: NTS	SHEET 2	2 OF 4
		DRAWING NUMBER		ISSUE
	ONNECTION TO QUALITY & SERVICE OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.			1

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER



SSUE NUMBER

DRIGINAL

1



	Mounting Options		ACAD REFERENCE NO. 333 ENG MASTER				
			DRAWN:	J.LEE	DATE: O	CT. 14/09	
			CHECKED:		DATE:		
			THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE:	NTS	SHEET :	3 OF 4
	I >	DRAWING		NUMBER		ISSUE	
	CANADA CANADA			3	33 Assembly		1

ISSUE NUMBER

ORIGINAL



Features

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

333 Series Card Edge Connector	ACAD REFERENCE NO. 333 ENG MASTER
Features and Specifications	DRAWN: J.LEE DATE: OCT. 14/09
realities and specifications	CHECKED: DATE:
	WINGS AND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4
I SI I I ORONTO, ONTARIO SHALL NOT	BE REPRODUCED, OR COPIED DRAWING NUMBER ISSUE
	JRE OR SALE OF APPARATUS 333 Assombly 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDAC:

333-048-558-201