**Mounting Option** 

07-M3-0.5 Metric Threaded Inserts

#### **Contact Detail**

524-P.C. Tail .018 Sq.(0.46 Sq.) - Tail LG=.175(4.45)


.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MAS




1220F NOWBER

ORIGINAL

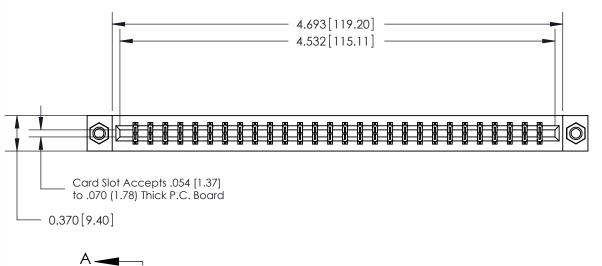

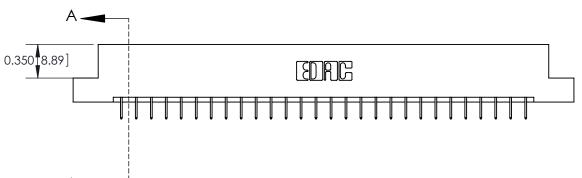



## **See Accompanying Page for:**

- Bend Detail
- Mounting Options
- Features and Specifications

333 Series Card Edge Connector
Part Number: 333-056-524-207

TORONTO, ONTARIO CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC.,AND
SHALL NOT BE REPRODUCED,OR COPIE!
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO	. 333 ENG MASTER
DRAWN: J.LEE	DATE: OCT. 14/09
CHECKED:	DATE:
SCALE: NTS	SHEET 1 OF 4
DRAWING NUMBER	ISSUE

DRAWING NUMBER ISSUE


333 Assembly 1

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER

ORIGINAL

1

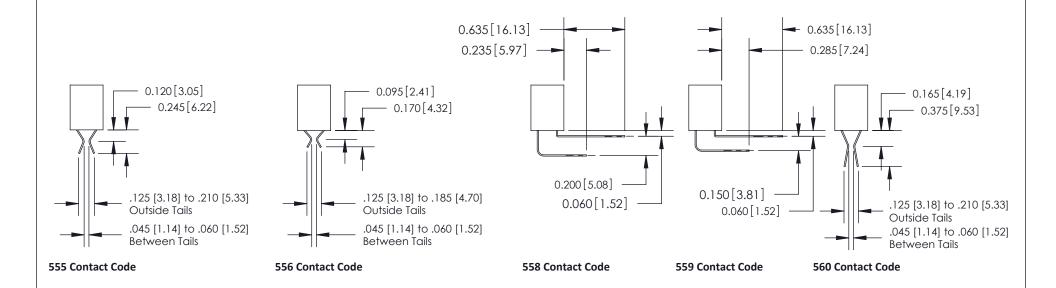

333 Series Card Edge Connector Contact Bend Detail		ACAD REFERENCE NO. 333 ENG MASTER			
		DRAWN: J.LEE	DATE: OCT. 14/09		
		CHECKED:	DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS	SCALE: NTS	SHEET 2	2 OF 4	
TORONTO, ONTARIO	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER		ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS			1	


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER



SSUE NUMBER

DRIGINAL

1

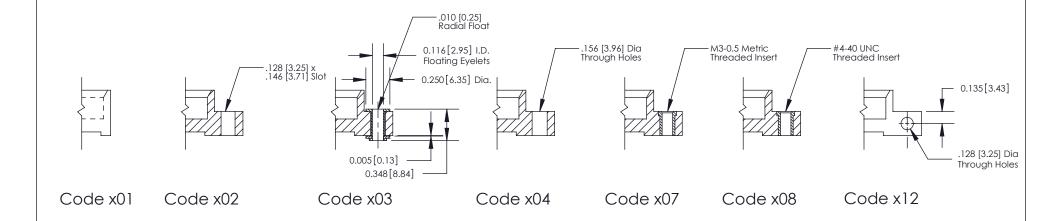

333 Series Card Edge Connector		ACAD REFERENCE NO. 333 ENG MASTER					
	Mounting Options		DRAWN:	J.LEE	DATE: O	CT. 14/09	
			CHECKED	):	DATE:		
		LD/10 1110 Intest blownings with si con lowing in		SCALE:	NTS	SHEET :	3 OF 4
		RONTO, ONTARIO	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	DRAWING	NUMBER		ISSUE
	YOUR CONNECTION TO QUA	CANADA	MANUFACTURE OR SALE OF APPARATUS	3	33 Assembly		1

ISSUE NUMBER

ORIGINAL



### **Features**

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

333 Series Card Edge Connector	ACAD REFERENCE NO. 333 ENG MASTER
Features and Specifications	DRAWN: J.LEE DATE: OCT. 14/09
realities and specifications	CHECKED: DATE:
	WINGS AND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4
I SI I I ORONTO, ONTARIO SHALL NOT	BE REPRODUCED, OR COPIED DRAWING NUMBER ISSUE
	JRE OR SALE OF APPARATUS 333 Assombly 1

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDAC:

333-056-524-207