


Feature


- Tolerance: $\pm 0.5\% \sim \pm 5\%$
- Application automobile industry, comply with the relevant provisions of AEC-Q200.
- Anti-sulfurized performance: H₂S 3~5ppm, 50°C $\pm 2^\circ\text{C}$, 91%~93%RH, 1000H
- Resistance range: 1 Ω ~10M Ω , 0 Ω
- Operating temperature range: -55°C ~ +155°C
- Stable electrical capability, high reliability
- Suit for reflow & wave soldering
- RoHS complaint

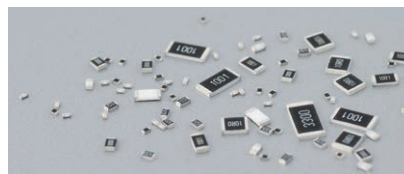


Application

- Intelligent home appliances
- High-end computer
- Medical equipment
- Industrial equipment
- Outdoor electronic application

Derating Curve

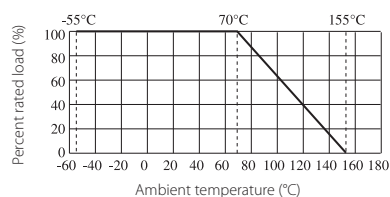

Figures

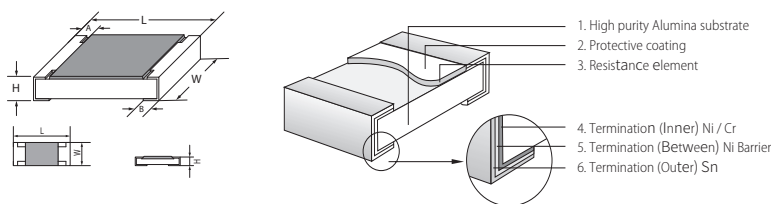

Dimension (mm)

TType	L	W	H	A	B
CQ01 (0201)	0.60 ± 0.03	0.30 ± 0.03	0.23 ± 0.03	0.12 ± 0.05	0.15 ± 0.05
CQ02 (0402)	1.00 ± 0.10	0.50 ± 0.05	0.35 ± 0.05	0.20 ± 0.10	0.25 ± 0.10
CQ03 (0603)	1.60 ± 0.10	0.80 ± 0.10	0.45 ± 0.10	0.30 ± 0.20	0.30 ± 0.20
CQ05 (0805)	2.00 ± 0.15	1.25 $^{+0.15}_{-0.10}$	0.55 ± 0.10	0.40 ± 0.20	0.40 ± 0.20
CQ06 (1206)	3.10 ± 0.15	1.55 $^{+0.15}_{-0.10}$	0.55 ± 0.10	0.45 ± 0.20	0.45 ± 0.20
CQ07 (1210)	3.10 ± 0.10	2.60 ± 0.20	0.55 ± 0.10	0.50 ± 0.25	0.50 ± 0.20
CQ10 (2010)	5.00 ± 0.10	2.50 ± 0.20	0.55 ± 0.10	0.60 ± 0.25	0.50 ± 0.20
CQ12 (2512)	6.35 ± 0.10	3.20 ± 0.20	0.55 ± 0.10	0.60 ± 0.25	0.50 ± 0.20


Specification

Type	Power (70°C)	Tolerance	Resistance Range	Max Working Voltage	Max Overload Voltage	Dielectric With-standing Voltage	Resistance Value of Jumper	Rated Current of Jumper	Max. Current of Jumper	Operating Temperature Range
CQ01(0201)	1/20W	$\pm 0.5\%$ $\pm 1\%$ $\pm 2\%$ $\pm 5\%$	0 Ω 1 Ω ~10M Ω	25V	50V	/	<50m Ω	0.5A	1A	-55~+155°C
CQ02(0402)	1/16W			50V	100V	100V	<50m Ω	1A	2A	
CQ03(0603)	1/10W			75V	150V	300V	<50m Ω	1A	2A	
CQ05(0805)	1/8W			150V	300V	500V	<50m Ω	2A	5A	
CQ06(1206)	1/4W			200V	400V	500V	<50m Ω	2A	10A	
CQ07(1210)	1/2W			200V	500V	500V	<50m Ω	2A	10A	
CQ10(2010)	3/4W			200V	500V	500V	<50m Ω	2A	10A	
CQ12(2512)	1W			200V	500V	500V	<50m Ω	2A	10A	

Performance Specification

Test Item	Reference standard	Test Methods	Evaluation Criteria
Temperature Coefficient of Resistance	MIL-STD-202 Method 304	Measure between: -55°C ~+155°C	CQ01: $1\Omega \leq R \leq 10\Omega$: -100~+350ppm/°C >10Ω: ±200ppm/°C CQ02-CQ12: $1\Omega \leq R \leq 10\Omega$: ±200ppm/°C >10Ω: ±100ppm/°C
Pre- and Post-Stress Electrical Test (Short time Overload)	AEC-Q200 TEST 1 IEC60115 4.13	2.5x Rated voltage or Max. Overload Voltage whichever is lower for 5 seconds, then check the resistance.	±1%: ±(1.0%+0.05Ω) ±5%: ±(2.0%+0.05Ω)
Biased Humidity	AEC-Q200 TEST 7 MIL-STD-202 Method 103	1000 hours 85°C/85%RH. Note: Specified conditions:10% of operating power. Measurement at 24±4 hours after test conclusion.	±1%: ±(1.0%+0.05Ω) ±5%: ±(3.0%+0.05Ω)
Operational Life	AEC-Q200 TEST 8 MIL-STD-202 Method 108	1,000 hours at 125°C, applied de-rated (36%) power of continuous working voltage, 1.5 hours on, 0.5 hour off.	±1%: ±(1.0%+0.1Ω) ±5%: ±(3.0%+0.1Ω)
Resistance to Soldering Heat	AEC-Q200 TEST 15 MIL-STD-202 Method 210	Condition B No pre-heat of samples. Note: Single Wave Solder - Procedure 2 for SMD and Procedure 1 for Leaded with solder within 1.5mm of device body.	±(1.0%+0.05Ω)
Solderability	AEC-Q200 TEST 18 J-STD-002	SMD. Electrical test not required. Magnification 50 X. Conditions: 1. Baking 4 hours@155°C dry heat, dipping @ 245±3°C for 5±0.5 second. 2. Steam aging 8 hours, dipping @ 260±3°C for 30±0.5 second.	Coverage must be over 95%.
Board Flex	AEC-Q200 TEST 21 AEC-Q200-005	Bending 3mm(CQ01-CQ05)/2mm(CQ06-CQ12)for 60±5sec	±(1.0%+0.05Ω)
Sulfuration test		H ₂ S 3~5PPM 50°C±2°C 91%~93% RH 1000H	±5%: ±(5.0%+0.05 Ω) ±1%: ±(1.0%+0.05 Ω)

Ordering Procedure (Example: CQ06 1/4W 5% 1.2 Ω T/R-5000)

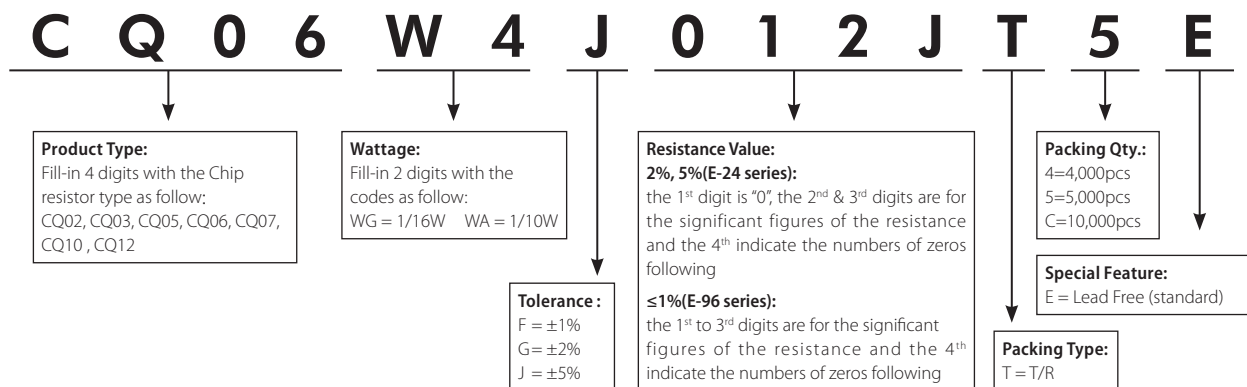

Remark: For more details, please check page 135, Part No. System

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Royalohm:

[CQ02WGF100KTCE](#) [CQ02WGF1133TCE](#) [CQ02WGF1213TCE](#) [CQ02WGF1372TCE](#) [CQ02WGF1692TCE](#)
[CQ02WGF1960TCE](#) [CQ02WGF200KTCE](#) [CQ02WGF2323TCE](#) [CQ02WGF270KTCE](#) [CQ02WGF3090TCE](#)
[CQ02WGF3301TCE](#) [CQ02WGF3603TCE](#) [CQ02WGF4122TCE](#) [CQ02WGF4530TCE](#) [CQ02WGF4873TCE](#)
[CQ02WGF5110TCE](#) [CQ02WGF6042TCE](#) [CQ02WGF6800TCE](#) [CQ02WGF6812TCE](#) [CQ02WGF8201TCE](#)
[CQ02WGF9531TCE](#) [CQ02WGFJ0123TCE](#) [CQ02WGFJ0154TCE](#) [CQ02WGFJ0222TCE](#) [CQ02WGFJ0335TCE](#)
[CQ02WGFJ0471TCE](#) [CQ02WGFJ0475TCE](#) [CQ02WGFJ0560TCE](#) [CQ02WGFJ0821TCE](#) [CQ03WAF1131T5E](#)
[CQ03WAF1210T5E](#) [CQ03WAF130JT5E](#) [CQ03WAF1502T5E](#) [CQ03WAF1820T5E](#) [CQ03WAF2152T5E](#)
[CQ03WAF2211T5E](#) [CQ03WAF249JT5E](#) [CQ03WAF3002T5E](#) [CQ03WAF330KT5E](#) [CQ03WAF3402T5E](#)
[CQ03WAF3903T5E](#) [CQ03WAF4533T5E](#) [CQ03WAF4990T5E](#) [CQ03WAF510JT5E](#) [CQ03WAF560JT5E](#)
[CQ03WAF665JT5E](#) [CQ03WAF750JT5E](#) [CQ03WAF8062T5E](#) [CQ03WAF9102T5E](#) [CQ03WAFJ0121T5E](#)
[CQ03WAFJ0163T5E](#) [CQ03WAFJ018JT5E](#) [CQ03WAFJ0243T5E](#) [CQ03WAFJ0364T5E](#) [CQ03WAFJ0473T5E](#)
[CQ03WAFJ0510T5E](#) [CQ03WAFJ0561T5E](#) [CQ03WAFJ0750T5E](#) [CQ03WAFJ0754T5E](#) [CQ05W8F1131T5E](#)
[CQ05W8F1271T5E](#) [CQ05W8F1471T5E](#) [CQ05W8F1692T5E](#) [CQ05W8F220KT5E](#) [CQ05W8F2701T5E](#)
[CQ05W8F2800T5E](#) [CQ05W8F3302T5E](#) [CQ05W8F392JT5E](#) [CQ05W8F4700T5E](#) [CQ05W8F4751T5E](#)
[CQ05W8F5603T5E](#) [CQ05W8F7152T5E](#) [CQ05W8F820KT5E](#) [CQ05W8J0000T5E](#) [CQ05W8J0122T5E](#)
[CQ05W8J0200T5E](#) [CQ05W8J0270T5E](#) [CQ05W8J0303T5E](#) [CQ05W8J0430T5E](#) [CQ05W8J0681T5E](#)
[CQ05W8J0913T5E](#) [CQ06W4F1004T5E](#) [CQ06W4F1203T5E](#) [CQ06W4F1430T5E](#) [CQ06W4F1600T5E](#)
[CQ06W4F1604T5E](#) [CQ06W4F1691T5E](#) [CQ06W4F2000T5E](#) [CQ06W4F2004T5E](#) [CQ06W4F2490T5E](#)
[CQ06W4F270JT5E](#) [CQ06W4F3001T5E](#) [CQ06W4F3302T5E](#) [CQ06W4F3921T5E](#) [CQ06W4F453JT5E](#)
[CQ06W4F470JT5E](#) [CQ06W4F5601T5E](#) [CQ06W4F6803T5E](#) [CQ06W4F768JT5E](#) [CQ06W4F820JT5E](#)