

•

SEIKO EPSON CORPORATION

LOW-JITTER SAW OSCILLATOR (SPSO) OUTPUT : LV-PECL, LVDS

For high temperature environment

EG-2123CB EG-2103CB

 Frequency range Supply voltage 	-	100 MHz to 700 MHz 2.5 V EG-2123CB
		3.3 V EG-2103CB
 Output 	- :	LV-PECL or LVDS
 Function 	:	Output enable (OE)

Output	2	LV-PECL or LVDS
Function	5	Output enable (OE)
External dimensions	2	5.0 × 3.2 × 1.4 mm

Specifications (characteristics)



Product Number EG-2123CB P: X1M000451xxxx00 EG-2123CB L: X1M000291xxxx00 EG-2103CB P: X1M000441xxxx00 EG-2103CB L: X1M000281xxxx00






Item		LV-PECL LVDS		DS				
	Symbol	EG-2123CB P	EG-2103CB P	EG-2123CB L	EG-2103CB L	Conditions / Remarks		
Output frequency range	fo	100 MHz to 700 MHz				Please contact us about available frequencies.		
Supply voltage	Vcc	2.5 V ± 0.125 V	3.3 V ± 0.33 V	2.5 V ± 0.125 V	3.3 V ± 0.33 V			
Storage temperature	T stg		-55 C to	+125 C	•	Storage as single product.		
Operating temperature	T use	P:0 C to	+70 C, R: -5 C to	0 +85 C, S: -20 C	to +70 C			
Frequency tolerance	f tol		H: ±100	0 × 10 ⁻⁶				
Current consumption	lcc	60 mA	Max.	30 m/	A Max.	OE=Vcc, L_ECL=50 Ω or L_LVDS=100 Ω		
Disable current	l dis	2 mA M				OE=GND		
Symmetry	SYM		45 % t	0 55 %		At outputs crossing point		
	Voн	1.55 V Typ.	2.35 V Typ.	-	-			
Output voltage (LV-PECL)	VOH	Vcc-1.025 V to		-		DC characteristics		
oupur tohugo (Et 1 EOE)	Vol	0.80 V Typ.	1.60 V Typ.	-				
		Vcc-1.81 V to	Vcc-1.62 V	-	-			
	VoD	-			47 mV to 454 mV	Vod1, Vod2	-	
Output voltage (LVDS)	dV₀₀	-		50 mV Max.		dVop = Vop1-Vop2	DC characteristics	
	Vos dVos	-		1.25 V Typ, 1.125 V to 1.375 V		Vos1, Vos2		
Output load condition		-		150 mV Max.		dVos = Vos1-Vos2 Terminated to Vcc -2.0 V		
(ECL) / (LVDS)		<u>50 Ω</u>				Connected between OUT to OUT		
			100 12					
Input voltage			30 % V			OE terminal		
Rise time / Fall time	tr / tf	400 ps Max.			Between 20 % and 80 % of (V _{OH} -V _{OL}). Between 20 % and 80 % of Differential Output Peak to Peak voltage.			
Start-up time	t_str	10 ms Max.			Time at minimum supply voltage to be 0 s			
Phase Jitter	tej	0.23 ps		0.27 p		100 MHz ≤ fo < 150 MHz	Offset frequency:	
		0.22 ps		0.24 p		150 MHz ≤ fo < 200 MHz		
		0.21 ps		0.23 p		200 MHz ≤ fo < 300 MHz		
		0.18 ps		0.19 p		300 MHz ≤ fo < 400 MHz	12 kHz to 20 MHz	
		0.16 ps		0.16 p		400 MHz ≤ fo < 500 MHz		
		0.14 ps		0.14 p		500 MHz ≤ fo < 600 MHz		
		0.10 ps	Max.	0.10 p	s Max.	$600 \text{ MHz} \le \text{fo} \le 700 \text{ MHz}$		
Frequency aging	f_age	H: Included in Frequency tolerance Max operating temperature,5 years, Vcc=2.5 V, 3.3 V			re,5 years,			

Product Name EG-2123 CB 212.500000MHz P H R H


(Standard form)

2 3 4567②Package type ③Frequency ①Model

④Output(P:LV-PECL, L:LVDS) (5) Frequency tolerance (6) Operating temperature ⑦Frequency aging (H*1: Frequency tolerance include aging)



*1 This includes initial frequency tolerance, temperature variation, supply voltage change, reflow drift and estimation of 5 years aging at max opera ing temperature.

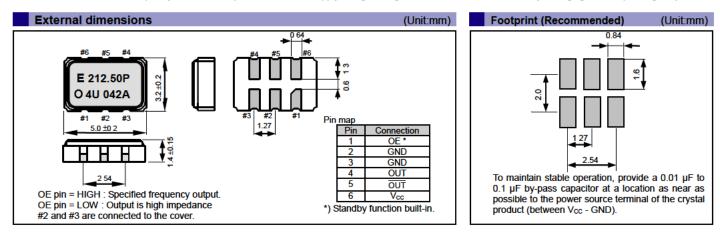

PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.

WORKING FOR HIGH QUALITY

In order provide high quality and reliable products and services than meet customer needs, Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired IATF 16949 certification that is requested strongly by major automotive manufacturers as standard.

Explanation of the mark that are using it for the catalog

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.

IATF 16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.

Pb Free	► Pb free.
RoHS	 Complies with EU RoHS directive. *About the products without the Pb-free mark. Contains Pb in products exempted by EU RoHS directive. (Contains Pb in sealing glass, high melting temperature type solder or other.)
For Automotive	► Designed for automotive applications such as Car Multimedia, Body Electronics, Remote Keyless Entry etc.
Automotive Safety	► Designed for automotive applications related to driving safety (Engine Control Unit, Air Bag, ESC etc).

NOTICE : PLEASE READ CAREFULLY BELOW BEFORE THE USE OF THIS DOCUMENT ©Seiko Epson Corporation 2020

- 1. The content of this document is subject to change without notice. Before purchasing or using Epson products, please contact with sales representative of Seiko Epson Corporation ("Epson") for the latest information and be always sure to check the latest information published on Epson's official web sites and resources.
- 2. This document may not be copied, reproduced, or used for any other purposes, in whole or in part, without Epson's prior consent.
- 3. Information provided in this document including, but not limited to application circuits, programs and usage, is for reference purpose only. Epson makes no guarantees against any infringements or damages to any third parties' intellectual property rights or any other rights resulting from the information. This document does not grant you any licenses, any intellectual property rights or any other rights with respect to Epson products owned by Epson or any third parties.
- 4. Using Epson products, you shall be responsible for safe design in your products; that is, your hardware, software, and/or systems shall be designed enough to prevent any critical harm or damages to life, health or property, even if any malfunction or failure might be caused by Epson products. In designing your products with Epson products, please be sure to check and comply with the latest information regarding Epson products (including, but not limited to this document, specifications, data sheets, manuals, and Epson's web site). Using technical contents such as product data, graphic and chart, and technical information, including programs, algorithms and application circuit examples under this document, you shall evaluate your products thoroughly both in stand-alone basis and within your overall systems. You shall be solely responsible for deciding whether to adopt/use Epson products with your products.
- 5. Epson has prepared this document carefully to be accurate and dependable, but Epson does not guarantee that the information is always accurate and complete. Epson assumes no responsibility for any damages you incurred due to any misinformation in this document.
- No dismantling, analysis, reverse engineering, modification, alteration, adaptation, reproduction, etc., of Epson products is allowed.
 Epson products have been designed, developed and manufactured to be used in general electronic applications and specifically designated applications ("Anticipated Purpose"). Epson products are NOT intended for any use beyond the Anticipated Purpose that requires particular quality or extremely high reliability in order to refrain from causing any malfunction or failure leading to critical harm to life and health, serious property damage, or severe impact on society, including, but not limited to listed below ("Specific Purpose"). Therefore, you are strongly advised to use Epson products only for the Anticipated Purpose. Should you desire to purchase and use Epson products for Specific Purpose, Epson makes no warranty and disclaims with respect to Epson products, whether express or implied, including without limitation any implied warranty of merchantability or fitness for any Specific Purpose. Please be sure to contact our sales representative in advance, if you desire Epson products for Specific Purpose:

Space equipment (artificial satellites, rockets, etc.)/ Transportation vehicles and their control equipment (automobiles, aircraft, trains, ships, etc.) / Medical equipment/ Relay equipment to be placed on sea floor/ Power station control equipment / Disaster or crime prevention equipment/Traffic control equipment/ Financial equipment Other equipment and the state of a list is a state of the state of the

Other applications requiring similar levels of reliability as the above

- 8. Epson products listed in this document and our associated technologies shall not be used in any equipment or systems that laws and regulations in Japan or any other countries prohibit to manufacture, use or sell. Furthermore, Epson products and our associated technologies shall not be used for the purposes of military weapons development (e.g. mass destruction weapons), military use, or any other military applications. If exporting Epson products or our associated technologies, please be sure to comply with the Foreign Exchange and Foreign Trade Control Act in Japan, Export Administration Regulations in the U.S.A (EAR) and other export-related laws and regulations in Japan and any other countries and to follow their required procedures.
- 9. Epson assumes no responsibility for any damages (whether direct or indirect) caused by or in relation with your non-compliance with the terms and conditions in this document or for any damages (whether direct or indirect) incurred by any third party that you give, transfer or assign Epson products.
- 10. For more details or other concerns about this document, please contact our sales representative.
- 11. Company names and product names listed in this document are trademarks or registered trademarks of their respective companies.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Epson:

EG-2123CB 625.0000M-LHRHB EG-2123CB 625.0000M-LHRHL0