




RECOMMENDED PANEL MOUNTING

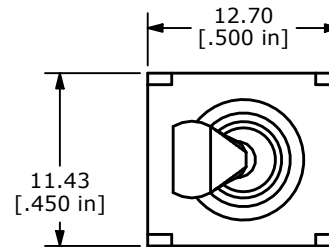

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3, 5-6	N/A	2-1, 5-4

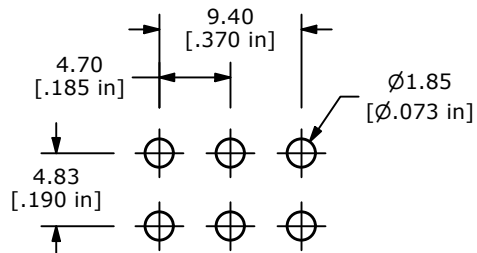



RECOMMENDED PCB LAYOUT

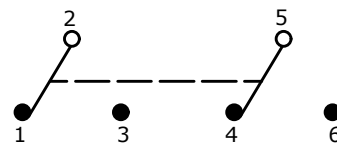

CIRCUIT: DPDT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 2A @ 250 VAC
5A @ 120 VAC OR 28 VDC
6. ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
9. OPERATING TEMP.: -40°C TO 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. HARDWARE INCLUDED
T100011 - LOCK WASHER - QTY 1
T100002 - LOCK RING - QTY 1
T100000 - HEX NUT - QTY 2

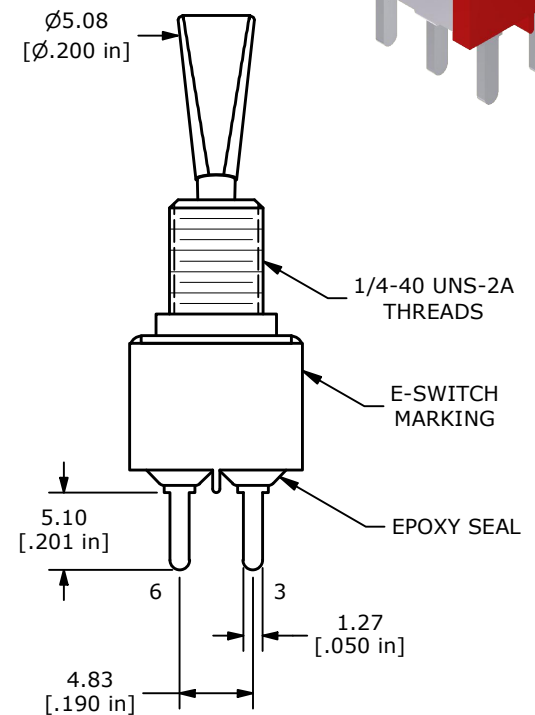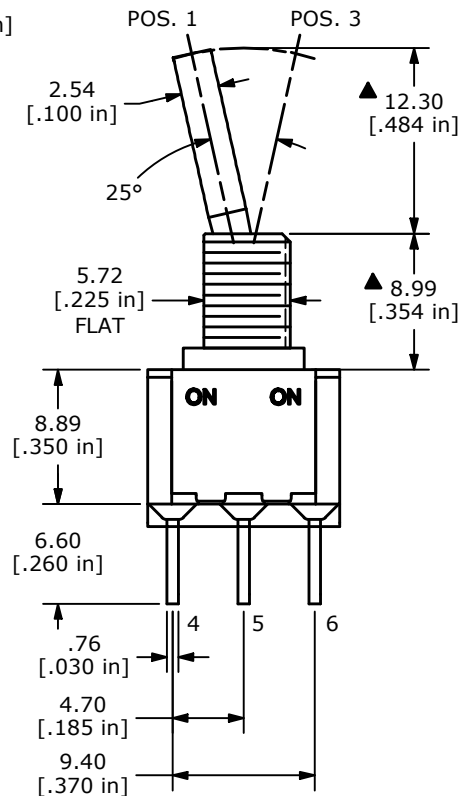1/4-40 UNS-2A
THREADSE-SWITCH
MARKING

EPOXY SEAL

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190 in]5.10
[.201 in]

6

3

1.27
[.050 in]4.83
[.190

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[100DP1T6B15M2QEH](#)