




CIRCUIT: DPDT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	NONE	ON
2-3,5-6	OPEN	2-1,5-4


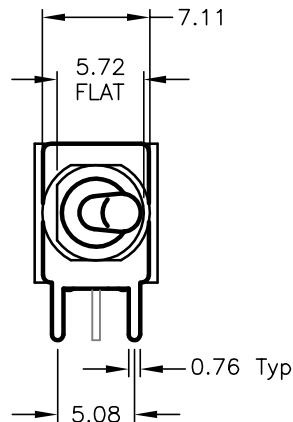


## NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A @120VAC OR 28VDC  
1A @250VAC
5. FIXED TERMINAL/MOVING CONTACT:  
COPPER ALLOY W/SILVER PLATE.
6. ELECTRIC LIFE: 30,000 make-and-break cycles  
at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP. -30°C to +85°C

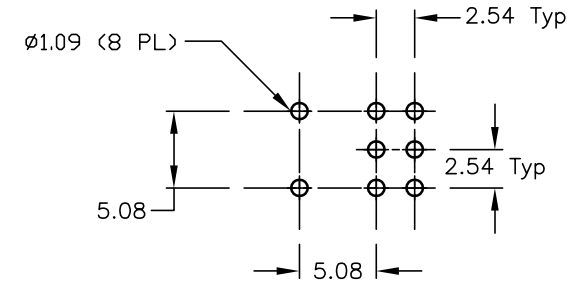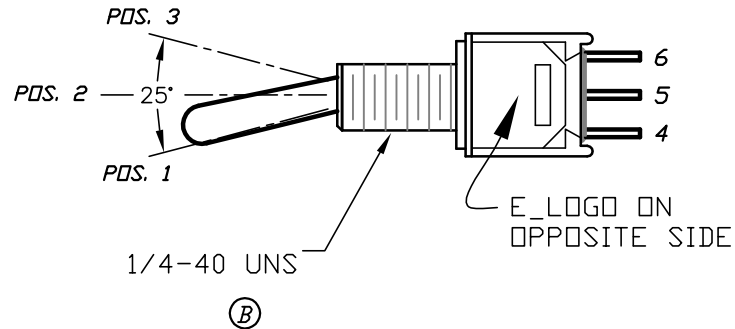

RECOMMENDED P.C.B LAYOUT

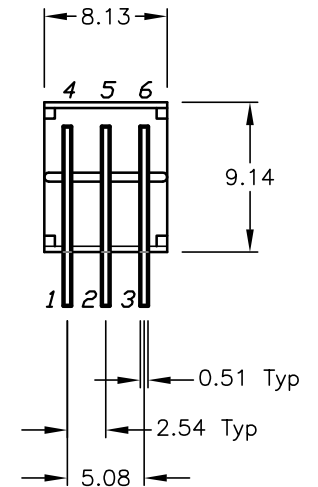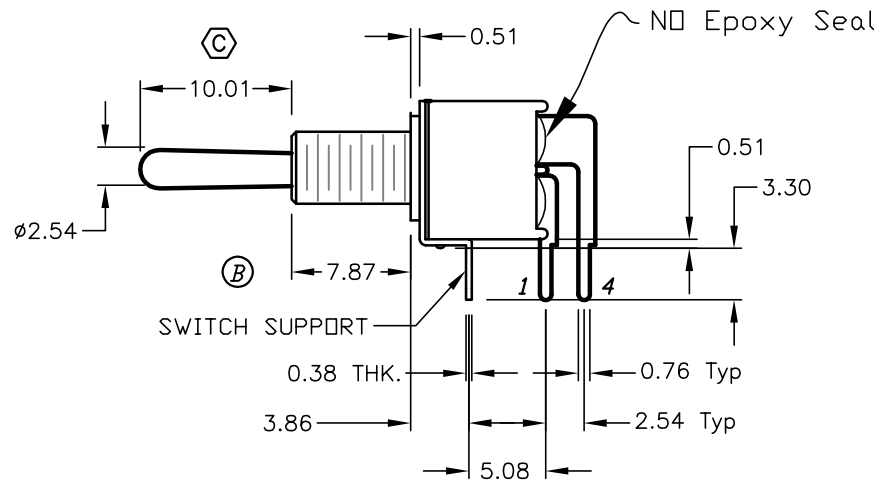

C	14465	CORRECT ACTUATOR LENGTH	11/8/04	AR
B	12457	WRONG DESC./BUSHING	10/3/02	CJB
A	12457	RELEASED FOR PRODUCTION	10/2/02	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT  
IS PROPRIETARY TO E-SWITCH AND IS  
NOT TO BE COPIED OR TRANSFERRED

**E-SWITCH®**

TITLE

200MDP1T4B5M6Q

SCALE

2:1

DATE

10/2/02

DR

CJB

DWG

T221044

REV

C

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[200MDP1T4B5M6Q](#)