


2  
1 3  
▲ CIRCUIT: SPDT

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 3A @ 120VAC; 1A @ 250VAC
6. LIFE EXPECTANCY: 30,000 MAKE-AND-BREAK  
CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 M $\Omega$  MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2011/65/EU (ROHS) COMPLIANT.

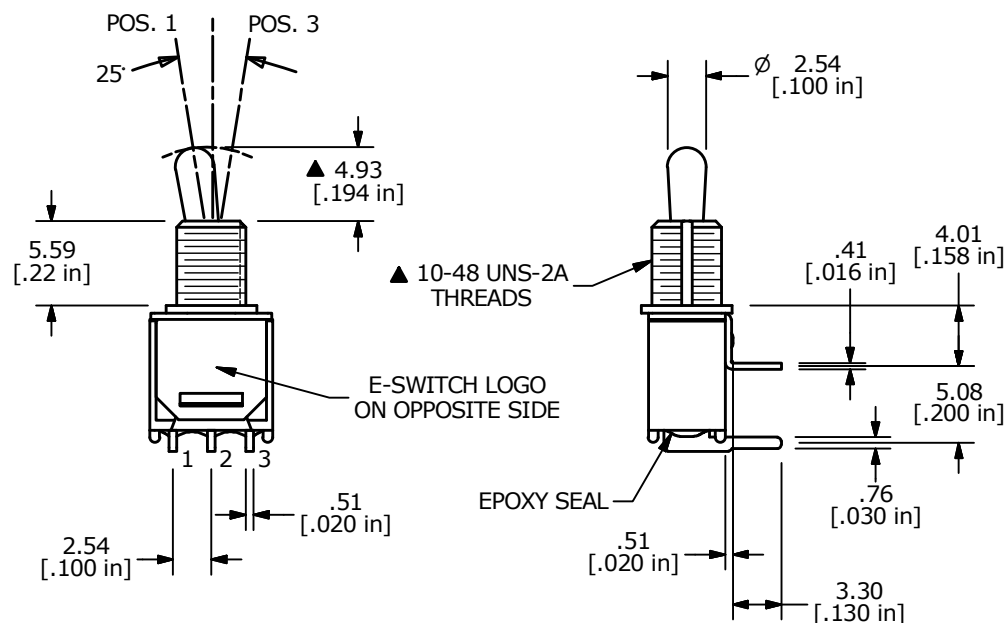

|                                                                                                        |                         |                 |                       |                 |
|--------------------------------------------------------------------------------------------------------|-------------------------|-----------------|-----------------------|-----------------|
|  <b>E-SWITCH®</b> |                         |                 |                       |                 |
| <b>TITLE</b> 200MSP1T2B3M6QE                                                                           |                         |                 |                       |                 |
| <b>SCALE</b><br>2:1                                                                                    | <b>DATE</b><br>5/5/2009 | <b>DR</b><br>RC | <b>DWG</b><br>T221004 | <b>REV</b><br>C |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[200MSP1T2B3M6QE](#)