



RECOMMENDED P.C.B. LAYOUT

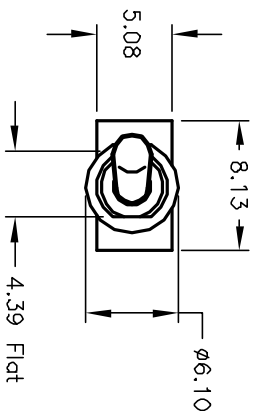


CIRCUIT: SPDT  
CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
<DN>	DEF	<DN>
2-3	DPEN	2-1

( > )=Momentary

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4(VA) @20V max. (AC or dc)
- ▲ 5. FIXED TERMINAL & MOVING CONTACT:  
Copper Alloy w/Gold plate over  
Nickel plate.
6. ELECTRIC LIFE: 30,000 make-and-break cycles  
at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C

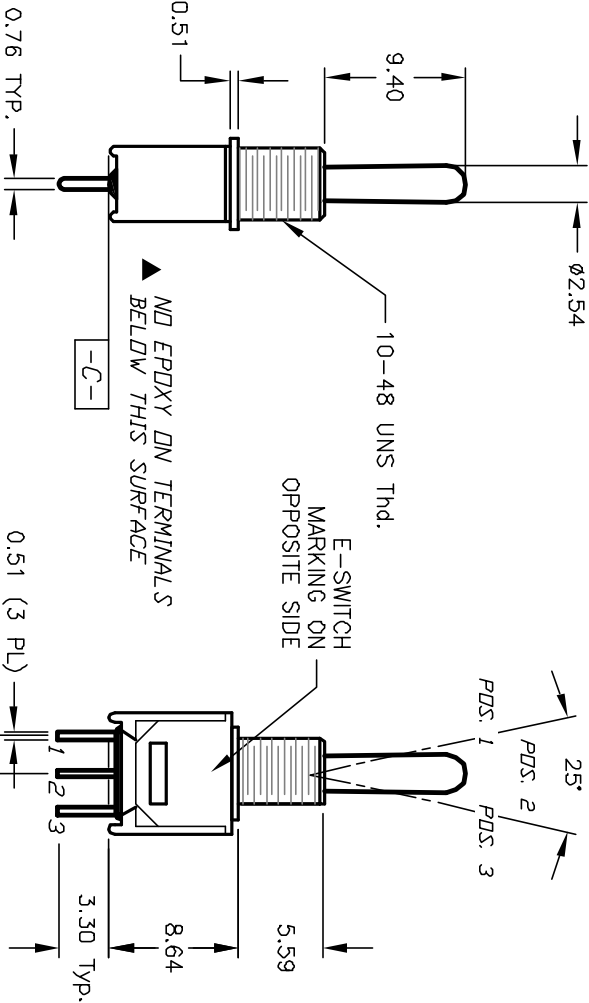

TITLE				E-SWITCH®			
200 MSP-4 T1 B1 M2 R E (GOLD CONTACTS)							
A	12797	RELEASED FOR PRODUCTION	2/6/03	CJB			
REV.	ECN NO.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR
		THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			2:1	2/6/03	CJB
							DWG
							T214003
							REV
							A

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[200MSP4T1B1M2RE](#)