


P.C. MOUNTING



CIRCUIT: 2PDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4

X.XX=±0.25

3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING 0.1A @30V DC

5. MATERIALS:

CONTACT/TERMINALS: SILVER PLATE
 HOUSING: PBT UL94HB
 BASE: PA66 UL94HB
 ACTUATOR: POM
 CAP: ABS UL94V0

6. CONTACT RESISTANCE: 100 mΩ (INITIAL)

7. TIMING: NON-SHORTING

8. OPERATING FORCE: 230±50GF


9. TRAVEL: LATCHING
 2MM TO LOCK
 3MM OVERALL

10. ELECTRICAL LIFE: 10000 CYCLES

11. OPERATING TEMP: -20°C TO +70°C



12. 2002/95/EC (ROHS) COMPLIANT

13. ▲ DENOTES CRITICAL PARAMETER.

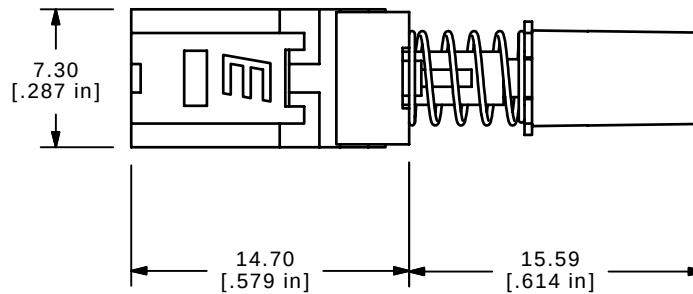


▲ PBH2UEENAGX
 (Q960000)

▲ 1RRED
 (Q800302)

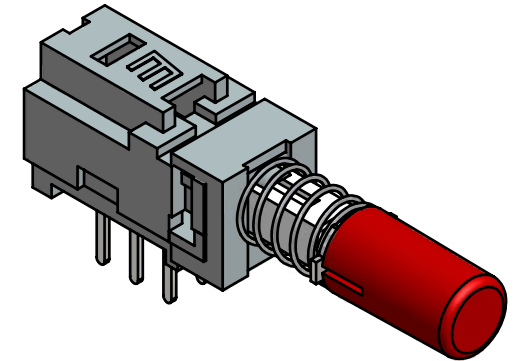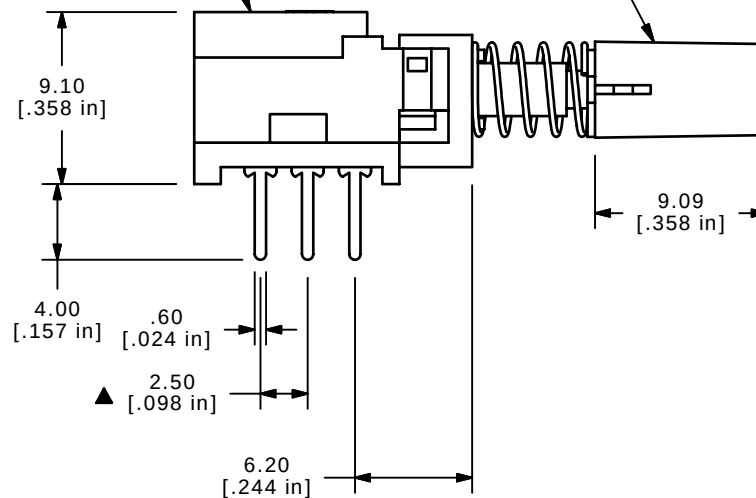

ISOMETRIC

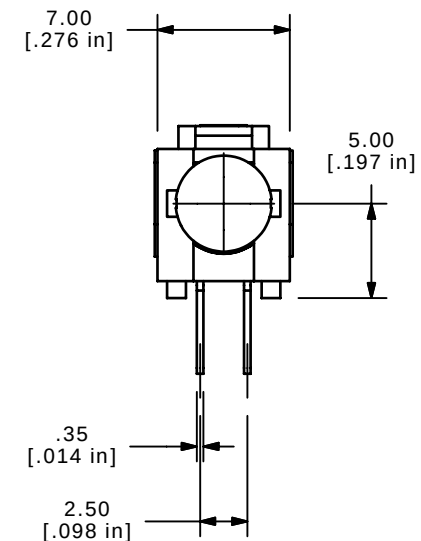

C	15681	ADD CRITICAL TO 2.50 DIM	1/16/06	PH
B	15508	DIMS FROM 9.00 AND 15.50	11/8/05	PH
A	15501	RELEASED FOR PRODUCTION	11/7/05	PH
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
 TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE PBH2UEENAG1RRED

SCALE 2.5:1

DATE 11/7/2005

DR PH

DWG XQ0016P

REV C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[PBH2UEENAG1RRED](#)