

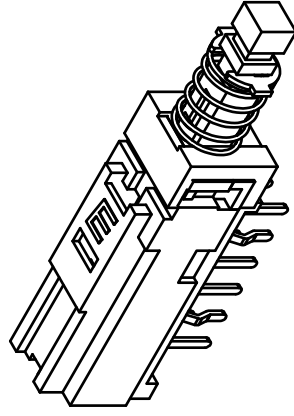


P.C. MOUNTING

CIRCUIT DIAGRAM

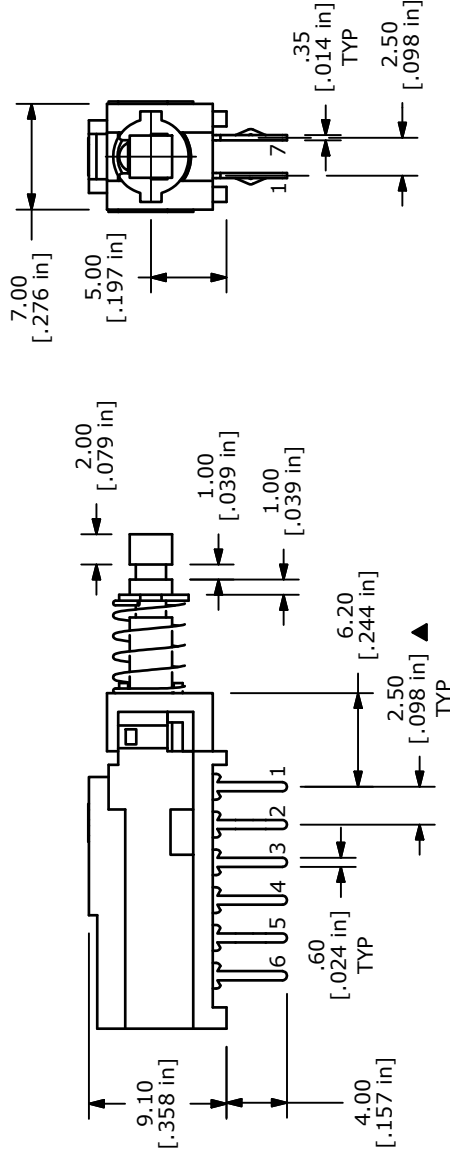

ISOMETRIC

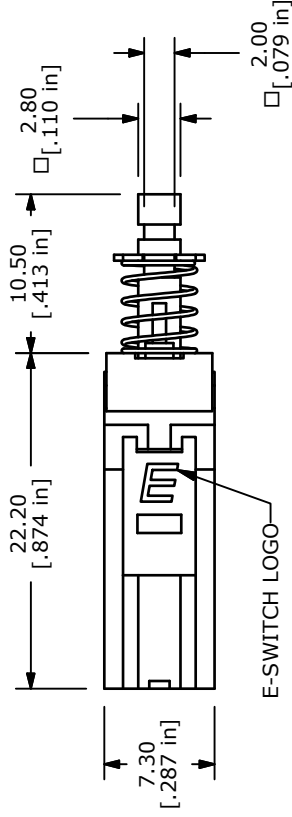

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X $\pm$ 0.4
X.XX $\pm$ 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING 0.1A @30V DC
- ▲ 5. MATERIALS:
 - CONTACT/TERMINALS: SILVER PLATE
 - HOUSING: PBT UL94HB
 - BASE: PA66 UL94HB
 - ACTUATOR: POM
6. CONTACT RESISTANCE: 100 MILLI-OHM (INITIAL)
- ▲ 7. TIMING: NON-SHORTING
8. OPERATING FORCE: 280 $\pm$ 50GF
9. TRAVEL: LATCHING
2MM TO LOCK
3MM OVERALL
10. ELECTRICAL LIFE: 10000 CYCLES
11. OPERATING TEMP: -20°C TO +70°C
12. ▲ DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMPLIANT

C	19671	UPDATE CIRCUIT DIAGRAM	2/10/11	BGL
B	15671	ADD ROHS, EDIT PC MOUNT DIM	1/10/06	PH
A	15095	RELEASED FOR PRODUCTION	7/29/05	BK
REV	PCR NO	DESCRIPTION	DATE	BY
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				
SCALE		2:1	DATE	7/29/2005
		DR	BK	DWG
		Q960032		REV
				C
TITLE PBH4UEESNPAGX				
E-SWITCH®				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[PBH4UEESNPAGX](#)