



Positively driven coupling relay in industrial enclosure 2 NO contacts / 2 NC contacts 24 V to 240 V AC/DC SIL 2 / PL c Spring-type terminals (push-in)

product brand name	SIRIUS
product designation	force-guided coupling relay
product type designation	3RQ1
<b>General technical data</b>	
product feature protective coating on printed-circuit board	No
consumed active power	2.3 W
insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	300 V
degree of pollution	3
surge voltage resistance rated value	4 kV
shock resistance	
• according to IEC 60068-2-27	11g / 15 ms
vibration resistance	
• according to IEC 60068-2-6	10 ... 55 Hz: 0.35 mm
operating frequency maximum	360 1/h
switching behavior	monostable
mechanical service life (operating cycles) typical	10 000 000
thermal current of the switching element with contacts maximum	5 A
reference code according to IEC 81346-2	K
Substance Prohibitance (Date)	05/31/2018
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1 4,4'-isopropylidenediphenol (Bisphenol A, BPA) - 80-05-7
Weight	0.179 kg
<b>Product Function</b>	
suitability for operation device connector 3ZY12	No
<b>Control circuit/ Control</b>	
control supply voltage 1 at AC	
• at 50 Hz	24 ... 240 V
• at 60 Hz	24 ... 240 V
control supply voltage 1 at DC	24 ... 240 V
operating range factor control supply voltage rated value at DC	
• initial value	0.7
• full-scale value	1.1
operating range factor control supply voltage rated value at AC at 50 Hz	
• initial value	0.85
• full-scale value	1.1

<b>operating range factor control supply voltage rated value at AC at 60 Hz</b>	
• initial value	0.85
• full-scale value	1.1
<b>ON-delay time</b>	
• at AC maximum	50 ms
• at DC maximum	50 ms
<b>OFF-delay time maximum</b>	60 ms
<b>Switching Function</b>	
<b>design of the switching function</b>	NC contact and NO contact
<b>Mechanical data</b>	
<b>product component plug-in socket</b>	No
<b>Short-circuit protection</b>	
design of the fuse link for short-circuit protection of the auxiliary switch required	fuse gL/gG: 6 A
<b>Auxiliary circuit</b>	
<b>material of switching contacts</b>	AgSnO2 + Au flash
<b>number of NC contacts for auxiliary contacts</b>	2
<b>number of NO contacts for auxiliary contacts</b>	2
number of CO contacts for auxiliary contacts	0
<b>type of voltage</b>	AC/DC
<b>Inputs/ Outputs</b>	
<b>output current minimum</b>	10 mA
<b>ampacity of the output relay at AC-15</b>	
• at 250 V at 50/60 Hz	1.5 A
<b>ampacity of the output relay at DC-13</b>	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A
<b>Electromagnetic compatibility</b>	
EMC emitted interference according to IEC 60947-1	ambience A (industrial sector)
EMC immunity according to IEC 60947-1	corresponds to degree of severity 3
<b>conducted interference</b>	
• due to burst according to IEC 61000-4-4	2 kV
• due to conductor-earth surge according to IEC 61000-4-5	2 kV (line to ground)
• due to conductor-conductor surge according to IEC 61000-4-5	1 kV (line to line)
<b>field-based interference according to IEC 61000-4-3</b>	10 V/m
<b>electrostatic discharge according to IEC 61000-4-2</b>	4 kV contact discharging, 8 kV air discharging
<b>Display</b>	
<b>product component LED</b>	Yes
<b>Safety related data</b>	
<b>product function</b>	
• positively driven operation according to IEC 60947-5-1	Yes
<b>suitability for use</b>	
• safety-related switching on	No
• safety-related switching OFF	Yes
<b>safe state</b>	safe shutdown
<b>test wear-related service life necessary</b>	Yes
<b>stop category according to IEC 60204-1</b>	0
<b>MTTFd</b>	470 a
<b>IEC 62061</b>	
<b>Safety Integrity Level (SIL)</b>	
• according to IEC 62061	2
<b>ISO 13849</b>	
<b>performance level (PL) according to ISO 13849-1</b>	c
<b>category according to ISO 13849-1</b>	1
<b>device type according to ISO 13849-1</b>	1
<b>overdimensioning according to ISO 13849-2 necessary</b>	No
<b>IEC 61508</b>	
<b>Safety Integrity Level (SIL) according to IEC 61508</b>	2

safety device type according to IEC 61508-2	Type A
PFHD with high demand rate according to IEC 61508	6E-7 1/h
PFDAvg with low demand rate according to IEC 61508	0.002
Safe failure fraction (SFF)	85 %
hardware fault tolerance according to IEC 61508	0
T1 value of service life according to IEC 61508	20 a

#### Connections/ Terminals

product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection	spring-loaded terminal (push-in)
wire length at DC maximum	2 000 m
type of connectable conductor cross-sections <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> <li>• for AWG cables solid</li> </ul>	0.5 ... 4 mm <sup>2</sup> 0.5 ... 2.5 mm <sup>2</sup> 20 ... 12
connectable conductor cross-section <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing maximum</li> <li>• finely stranded without core end processing minimum</li> </ul>	0.5 ... 4 mm <sup>2</sup> 2.5 mm <sup>2</sup> 0.5 mm <sup>2</sup>
AWG number as coded connectable conductor cross section <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> </ul>	12 ... 20 12 ... 20
stripped length of the cable for auxiliary and control contacts	10 mm

#### Installation/ mounting/ dimensions

mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail
height	100 mm
width	22.5 mm
depth	90 mm

#### Ambient conditions

installation altitude at height above sea level maximum	2 000 m
ambient temperature <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> </ul>	-25 ... +60 °C -40 ... +80 °C -40 ... +80 °C
relative humidity during operation	10 ... 95 %

#### Approvals Certificates

##### General Product Approval



EMV	Marine / Shipping	other	Railway	Environment
-----	-------------------	-------	---------	-------------



[Confirmation](#)

[Confirmation](#)

[Environmental Confirmations](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)


<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RQ1000-2HW00>


##### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RQ1000-2HW00>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RQ1000-2HW00>

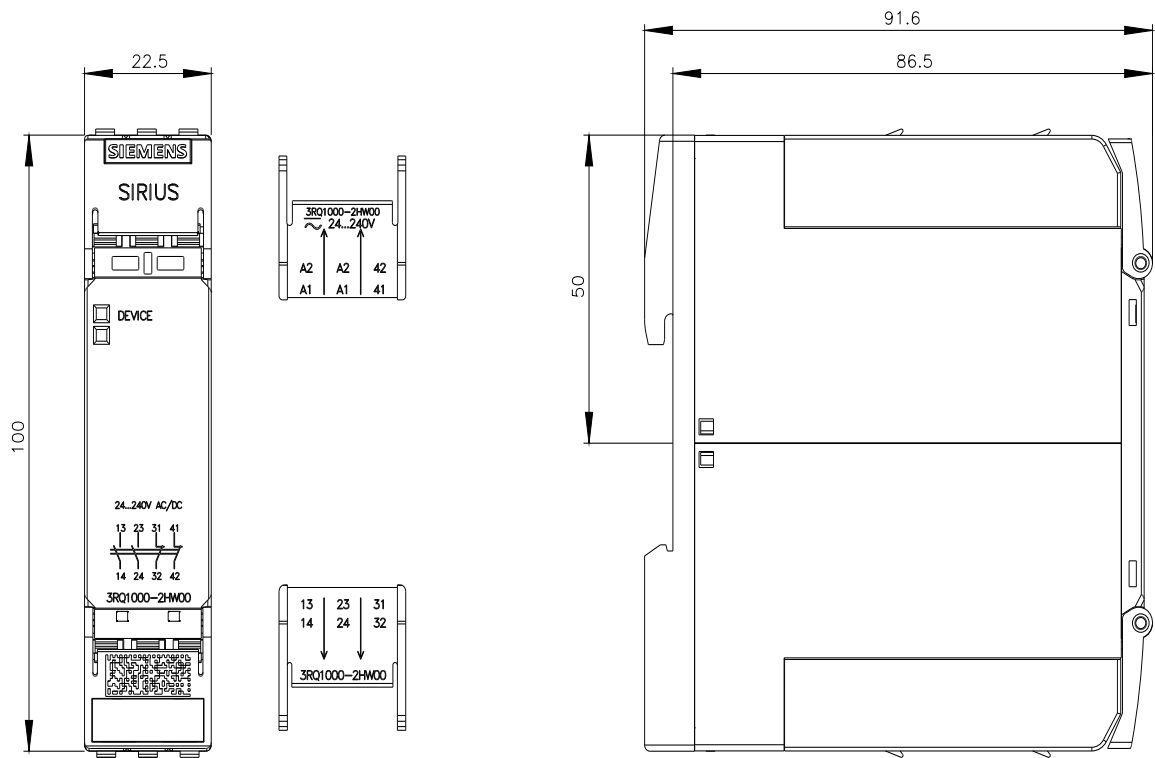

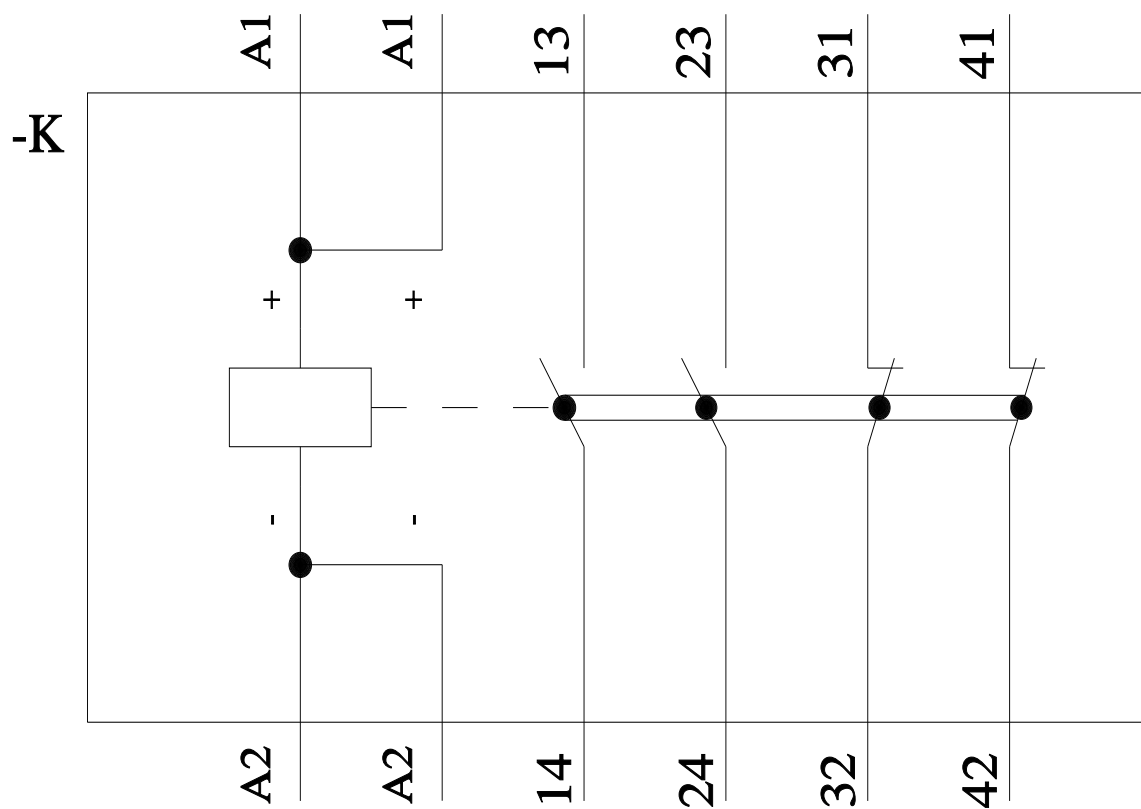

last modified:

4/1/2025 [↗](#)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Siemens:](#)

[3RQ10002HW00](#)