SIEMENS


Data sheet

3RT2926-5AC21



magnetic coil 24 V AC, 50/60 Hz for contactors 3RT2325-.A, 3RT2.26-.A, 3RT2.27-.A and 3RT2028-.A

product brand name	SIRIUS		
product category	Solenoid coils		
product designation	Magnet coil		
General technical data			
power loss [V·A] of magnet coil at AC typical	10.5 VA		
Substance Prohibitance (Date)	10/01/2009		
type of voltage of the control supply voltage	AC		
control supply voltage 1 at AC			
• at 50 Hz rated value	24 V		
• at 60 Hz rated value	24 V		
control supply voltage 2 at AC			
• at 50 Hz rated value	24 V		
• at 60 Hz rated value	24 V		
operating range factor control supply voltage rated value of magnet coil at AC			
• at 50 Hz	0.8 1.1		
• at 60 Hz	0.85 1.1		
apparent pick-up power of magnet coil at AC			
• at 50 Hz	77 VA		
• at 60 Hz	87 VA		
inductive power factor with closing power of the coil			
• at 50 Hz	0.82		
• at 60 Hz	0.76		
apparent holding power of magnet coil at AC			
• at 50 Hz	9.8 VA		
• at 60 Hz	87 VA		
inductive power factor with the holding power of the coil			
• at 50 Hz	0.25		
• at 60 Hz	0.8		
Environmental footprint			
Environmental Product Declaration(EPD)	Yes		
Global Warming Potential [CO2 eq] total	7.04 kg		
Global Warming Potential [CO2 eq] during manufacturing	0.089 kg		
Global Warming Potential [CO2 eq] during operation	6.96 kg		
Global Warming Potential [CO2 eq] after end of life	-0.0061 kg		
Approvals Certificates			
General Product Approval		EMV	Marine / Shipping

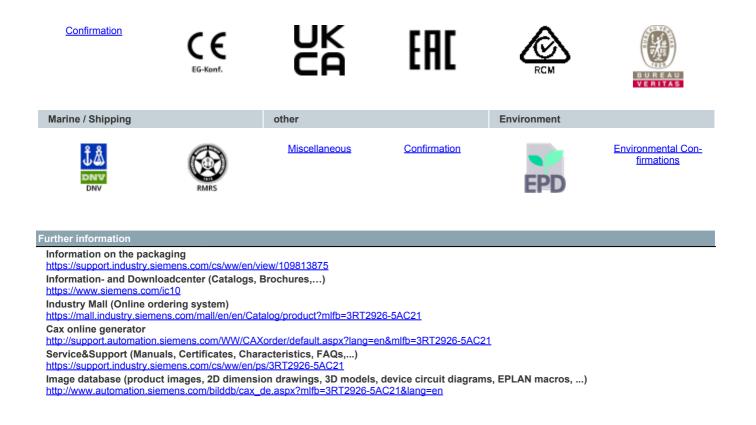

last modified:

1/10/2024 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT29265AC21