



Molded case circuit breaker 3RV1 for motor protection Standard switching capacity
Rated current $I_n = 200$ A electronic release Short-circuit protection adjustable 6-13
 $\times I_n$ Overload protection adjustable 0.4-1 $\times I_n$, Class 10A-32 $I_{cu} = 120$ kA at 400 V
3-pole, Screw terminal including phase barriers

product brand name	SIRIUS
product designation	molded-case circuit breaker
design of the product	for motor protection
product type designation	3RV1
General technical data	
product extension auxiliary switch	Yes
surge voltage resistance rated value	8 000 V
protection class IP on the front	IP20
shock resistance	12g / 11 ms
mechanical service life (operating cycles) of the main contacts typical	20 000
continuous current rated value	200 A
Substance Prohibitance (Date)	01/08/2008
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	80 ... 200 A
operating voltage	
• rated value	690 V
• rated value	20 ... 690 V
• at AC-3 rated value maximum	690 V
operational current at AC-3 at 400 V rated value	200 A
operating power at AC-3	
• at 400 V rated value	110 kW
operating frequency at AC-3 maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
• ground fault detection	No
• phase failure detection	Yes
trip class	CLASS 10, 20 and 30 adjustable
design of the overload release	electronic

maximum short-circuit current breaking capacity (Icu)	
• at AC at 240 V rated value	100 kA
• at AC at 400 V rated value	120 kA
• at AC at 500 V rated value	85 kA
• at AC at 690 V rated value	70 kA
response value current of instantaneous short-circuit trip unit	2 600 A

Short-circuit protection

design of the short-circuit trip	electronic
design of the overcurrent release and short-circuit release	electronic

Installation/ mounting/ dimensions

mounting position	any
fastening method	screw fixing
height	205 mm
width	105 mm
depth	103.5 mm
required spacing with side-by-side mounting	
• backwards	0 mm
• at the side	0 mm

Connections/ Terminals

product component removable terminal for auxiliary and control circuit	No
type of electrical connection	
• for main current circuit	screw-type terminals
• for auxiliary and control circuit	screw-type terminals
arrangement of electrical connectors for main current circuit	front side

Safety related data

touch protection against electrical shock	finger-safe
--	-------------

Certificates/ approvals

General Product Approval	Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------------	----------------------------------	--------------------------	--------------------------

[Confirmation](#)



[Special Test Certificate](#)



Marine / Shipping	other
--------------------------	--------------



[Confirmation](#)

[Miscellaneous](#)



Railway

[Special Test Certificate](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1063-7DL10>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1063-7DL10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1063-7DL10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1063-7DL10&lang=en

Characteristic: Tripping characteristics, I^2t , Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1063-7DL10/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV1063-7DL10&objecttype=14&gridview=view1>

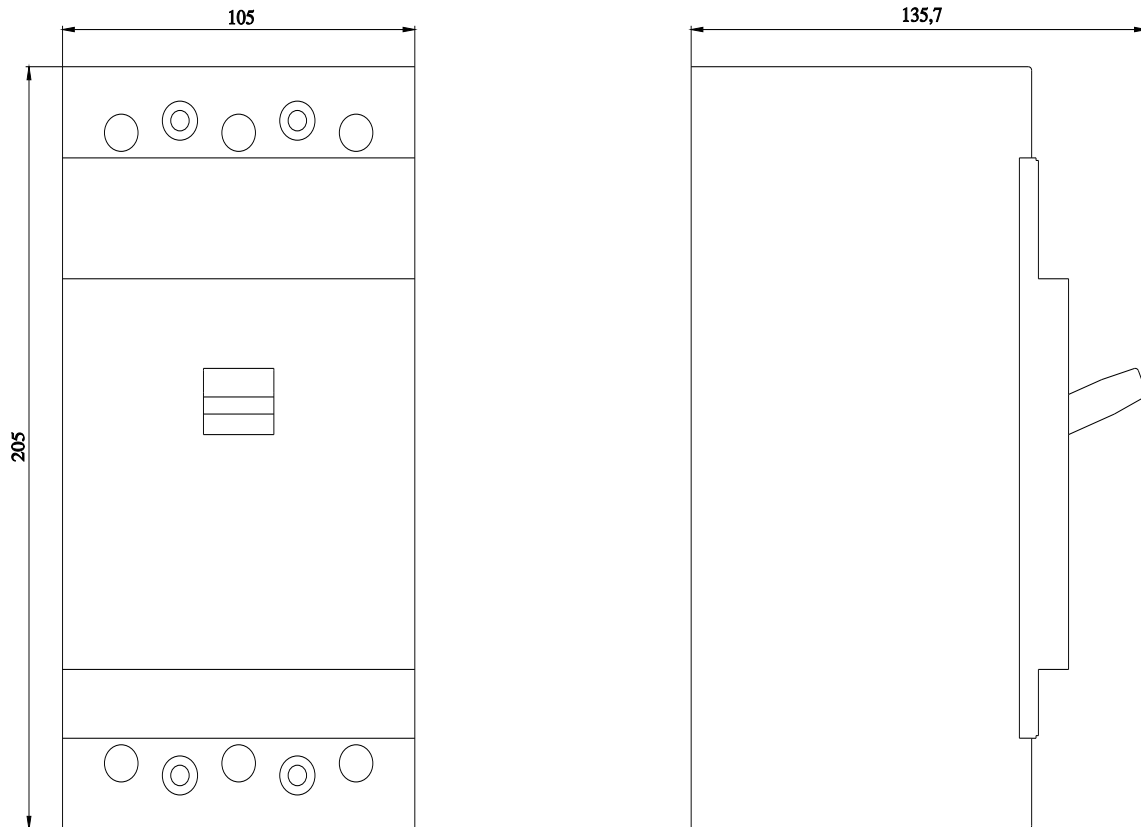

last modified:

12/1/2021 

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

[3RV10637DL10](#)