



SIRIUS safety relay Output expansion 4RO with relay enabling circuits 4 NO contacts plus Relay signaling circuit 1 NC contact  $U_s = 24\text{ V AC}$  screw terminal

product brand name	SIRIUS
product category	Safety relays
product designation	Output expansion
design of the product	Relay enabling circuits
<b>General technical data</b>	
protection class IP of the enclosure	IP20
touch protection against electrical shock	finger-safe
insulation voltage rated value	300 V
ambient temperature	
• during storage	-40 ... +80 °C
• during operation	-25 ... +60 °C
air pressure according to SN 31205	900 ... 1 060 hPa
relative humidity during operation	10 ... 95 %
installation altitude at height above sea level maximum	4 000 m; Derating, see Product Notification 109792701
vibration resistance according to IEC 60068-2-6	5 ... 500 Hz: 0.75 mm
shock resistance	10g / 11 ms
surge voltage resistance rated value	4 000 V
EMC emitted interference	IEC 60947-5-1, IEC 61000
installation environment regarding EMC	This product is suitable for Class B environments and can also be used in domestic environments.
overvoltage category	3
degree of pollution	3
reference code according to EN 61346-2	F
reference code according to IEC 81346-2	F
power loss [W] maximum	2.5 W
Safety Integrity Level (SIL) according to IEC 62061	3
Safety Integrity Level (SIL) according to IEC 61508	3
performance level (PL) according to ISO 13849-1	e
category according to EN ISO 13849-1	4
PFHD with high demand rate according to IEC 62061	1.7E-9 1/h
PFDavg with low demand rate according to IEC 61508	1E-6
T1 value for proof test interval or service life according to IEC 61508	20 a
hardware fault tolerance according to IEC 61508	1
safety device type according to IEC 61508-2	Type A
<b>Inputs/ Outputs</b>	
number of outputs as contact-affected switching element	
• as NC contact	
— for signaling function delayed switching	0
— for feedback circuit instantaneous contact	1
— safety-related instantaneous contact	0

— safety-related delayed switching	0
• as NO contact	
— for signaling function instantaneous contact	0
— for signaling function delayed switching	0
— safety-related instantaneous contact	4
— safety-related delayed switching	0
<b>number of outputs as contact-less semiconductor switching element</b>	
• for signaling function	
— delayed switching	0
<b>stop category according to IEC 60204-1</b>	0
<b>type of electrical connection plug-in socket</b>	No
<b>operating frequency maximum</b>	360 1/h
<b>switching capacity current of the NO contacts of the relay outputs</b>	
• at DC-13	
— at 24 V	5 A
— at 115 V	0.2 A
— at 230 V	0.1 A
• at AC-15	
— at 24 V	5 A
— at 115 V	5 A
— at 230 V	5 A
<b>thermal current of the switching element with contacts maximum</b>	5 A
<b>total current maximum</b>	12 A
<b>operational current at 17 V minimum</b>	5 mA
<b>mechanical service life (operating cycles) typical</b>	10 000 000
<b>design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required</b>	gL/gG: 6A or circuit breaker type A: 3A or circuit breaker type B: 2A or circuit breaker type C: 1A
<b>make time with automatic start</b>	
• typical	25 ms
• at AC maximum	40 ms
<b>make time with automatic start after power failure</b>	
• typical	25 ms
• maximum	40 ms
<b>backslide delay time in the event of power failure</b>	
• typical	45 ms
• maximum	50 ms
<b>recovery time after power failure typical</b>	0.06 s
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	AC
<b>control supply voltage frequency</b>	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
<b>control supply voltage</b>	
• at AC	
— at 50 Hz rated value	
—	24 V
— at 60 Hz rated value	
—	24 V
<b>operating range factor control supply voltage rated value of magnet coil</b>	
• at AC	
— at 50 Hz	0.85 ... 1.1
— at 60 Hz	0.85 ... 1.1
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	any
<b>required spacing for grounded parts at the side</b>	5 mm
<b>required spacing with side-by-side mounting at the side</b>	0 mm
<b>fastening method</b>	screw and snap-on mounting
<b>width</b>	22.5 mm

height	100 mm
depth	121.6 mm
<b>Connections/ Terminals</b>	
type of electrical connection	screw terminal
type of connectable conductor cross-sections	
• solid	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (1.0 ... 1.5 mm <sup>2</sup> )
• finely stranded	
— with core end processing	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )
type of connectable conductor cross-sections for AWG cables	
• solid	1x (20 ... 14), 2x (18 ... 16)
<b>Product Function</b>	
suitability for operation device connector 3ZY12	No
suitability for use	
• safety-related circuits	Yes
<b>Certificates/ approvals</b>	
certificate of suitability	
• TÜV (German technical inspectorate) certificate	Yes
• UL approval	Yes
<b>General Product Approval</b>	



[Confirmation](#)



EMV	Functional Safety	Test Certificates	other	Railway	Environment
-----	-------------------	-------------------	-------	---------	-------------



[Type Examination Certificate](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)

[Confirmation](#)

[Environmental Confirmations](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SK1211-1BB00>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SK1211-1BB00>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SK1211-1BB00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SK1211-1BB00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SK1211-1BB00&lang=en)

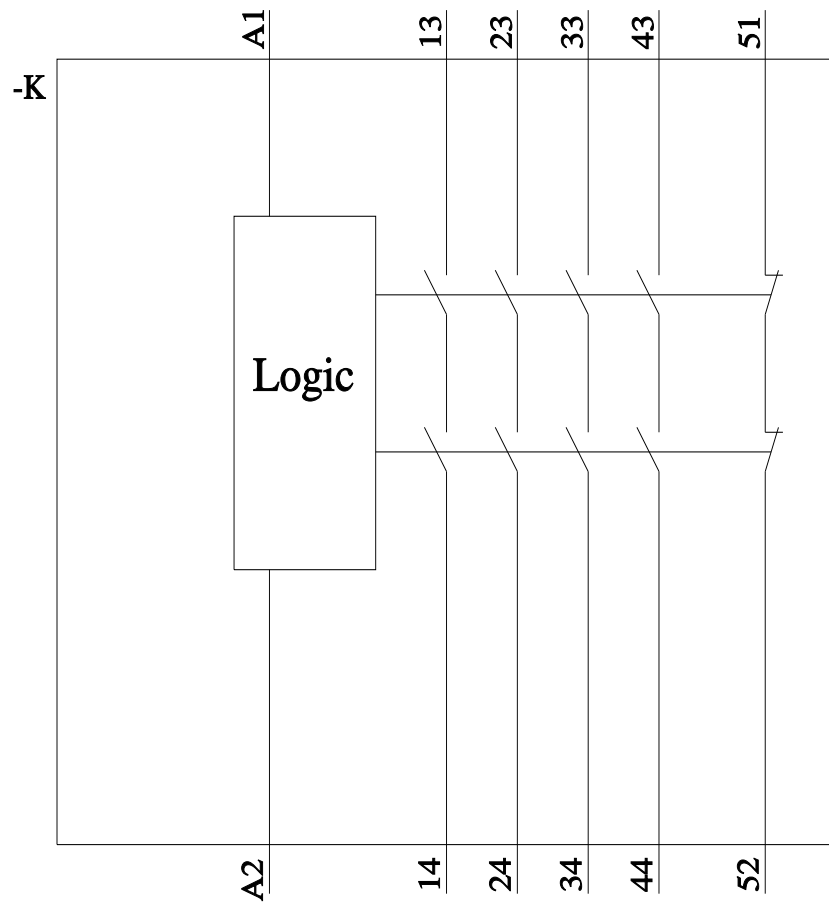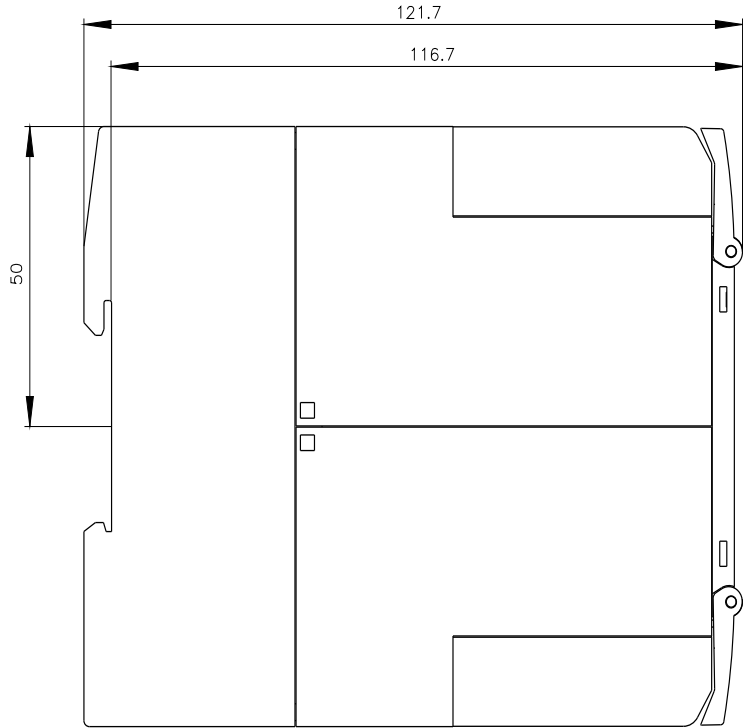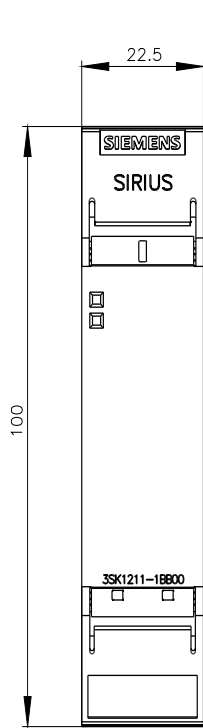

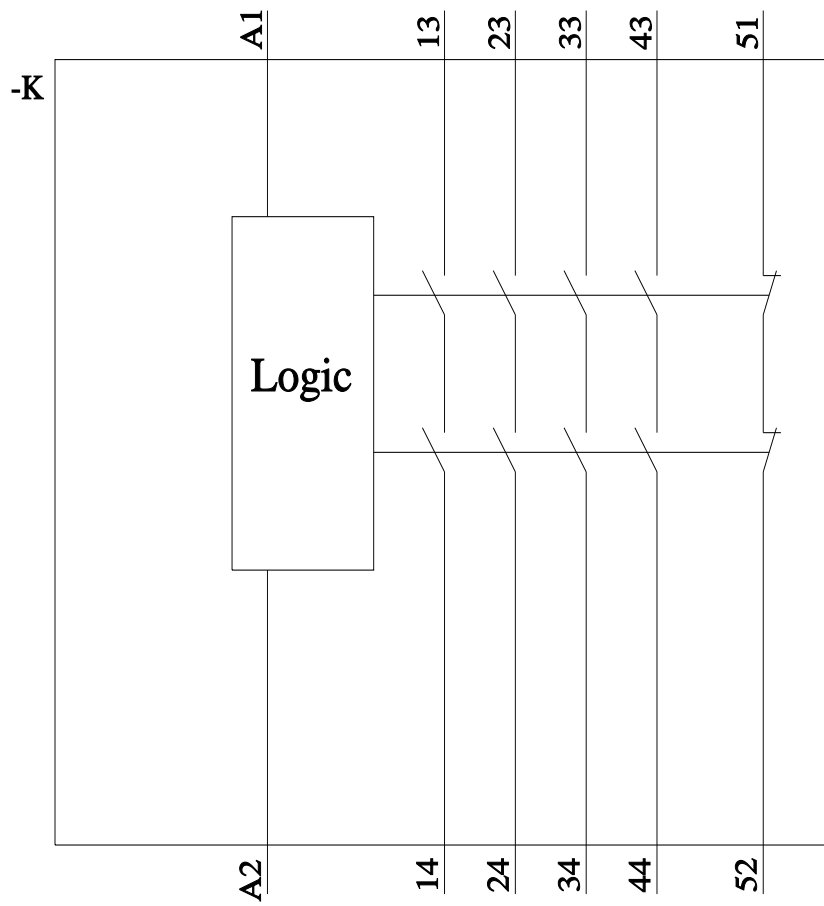

last modified:

4/8/2024 

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Siemens:](#)

[3SK12111BB00](#)